

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 3010743

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016168	KCP44414	
Sample Date		Client Info		03 Apr 2024	20 Apr 2022	
Machine Age	hrs	Client Info		45966	36998	
Oil Age	hrs	Client Info		0	3000	
Oil Changed		Client Info		Changed	N/A	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	2	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm			2	<1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		10	10	
Tin	ppm	ASTM D5185m	>10	10 <1	0	
Vanadium	ppm	ASTM D5185m	>10	<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	۰ <1	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
,		ASTM D5185m	0	0	0	
Manganese Magnesium	ppm	ASTM D5185m	100	۰ <1	0	
U	ppm		0	3	0	
Calcium	ppm	ASTM D5185m		ა <1		
Phosphorus	ppm	ASTM D5185m	0		22	
Zinc	ppm	ASTM D5185m		0	<1	
Sulfur	ppm	ASTM D5185m	23500	17120	13653	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	2	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	2	0	
Water	%	ASTM D6304	>0.05	0.008	0.010	
ppm Water	ppm	ASTM D6304	>500	83	101.4	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3377	63714	
Particles >6µm		ASTM D7647	>1300	511	<u> </u>	
Particles >14µm		ASTM D7647	>80	22	A 3316	
Particles >21µm		ASTM D7647	>20	7	<u> </u>	
Particles >38µm		ASTM D7647	>4	0	4	
Particles >71µm		ASTM D7647	>3	0	2	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/16/12	2 2/19	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.60	0.60	



Water (KF)

OIL ANALYSIS REPORT

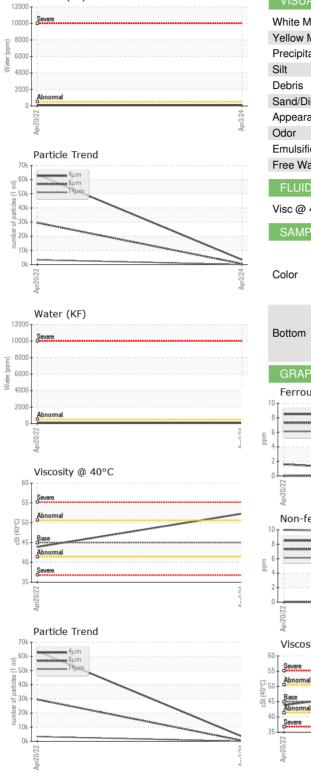

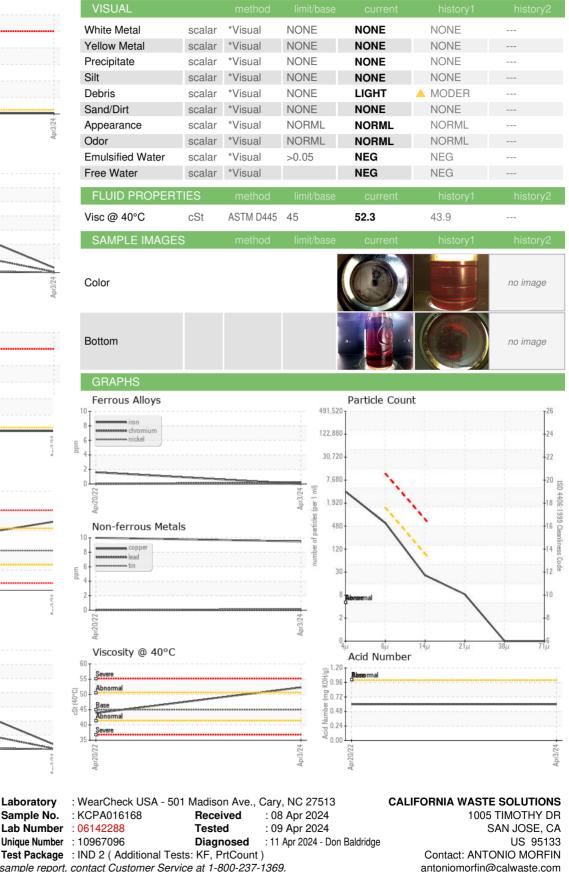

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CALSANCALI [WUSCAR] 06142288 (Generated: 04/11/2024 23:01:21) Rev: 1

Certificate 12367

Laboratory

Sample No.

Lab Number

Contact/Location: ANTONIO MORFIN - CALSANCALI

T:

F: