




# OIL ANALYSIS REPORT

## Sample Rating Trend

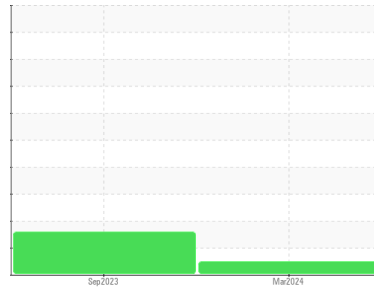

Machine Id  
**KAESER AS 25 8823719 (S/N 1743)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

### DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC130552</b>	KC124594	---
Sample Date	Client Info			<b>28 Mar 2024</b>	11 Sep 2023	---
Machine Age	hrs	Client Info		<b>7926</b>	3345	---
Oil Age	hrs	Client Info		<b>5000</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>8</b>	11	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m	90	<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m	90	<b>&lt;1</b>	13	---
Calcium	ppm	ASTM D5185m	2	<b>4</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Zinc	ppm	ASTM D5185m		<b>0</b>	1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	<1	---
Sodium	ppm	ASTM D5185m		<b>0</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	---
Water	%	ASTM D6304	>0.05	<b>0.005</b>	0.009	---
ppm Water	ppm	ASTM D6304	>500	<b>51</b>	91.5	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>2095</b>	61782	---
Particles >6µm		ASTM D7647	>1300	<b>679</b>	▲ 36595	---
Particles >14µm		ASTM D7647	>80	<b>24</b>	▲ 2086	---
Particles >21µm		ASTM D7647	>20	<b>5</b>	▲ 143	---
Particles >38µm		ASTM D7647	>4	<b>0</b>	3	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>18/17/12</b>	▲ 23/22/18	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.33</b>	0.29	---


# OIL ANALYSIS REPORT

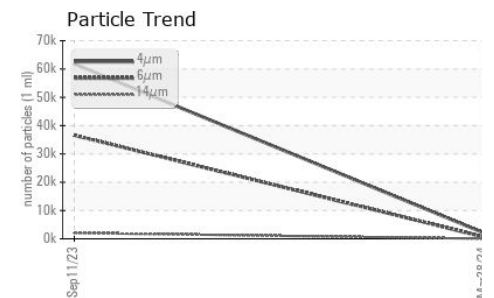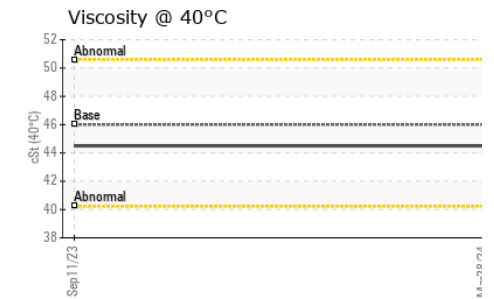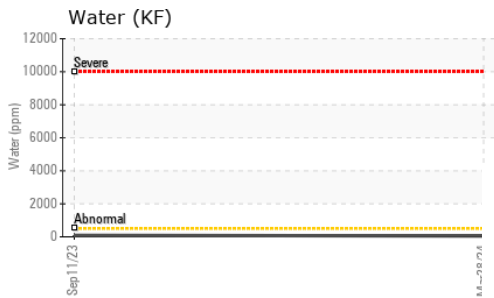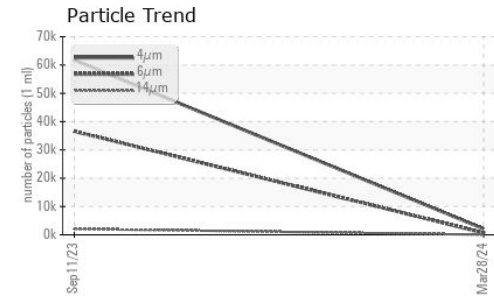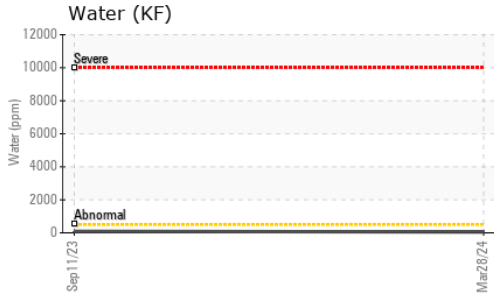






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

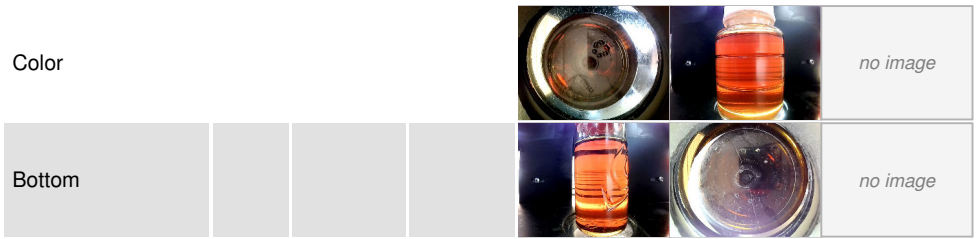

## GRAPHS

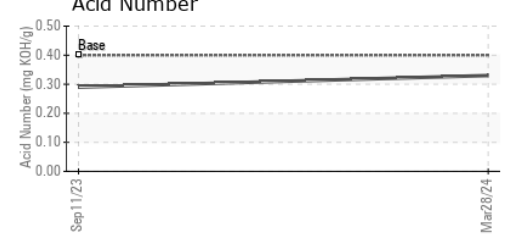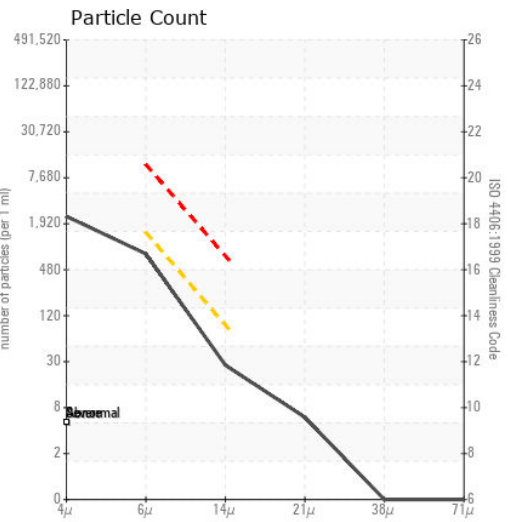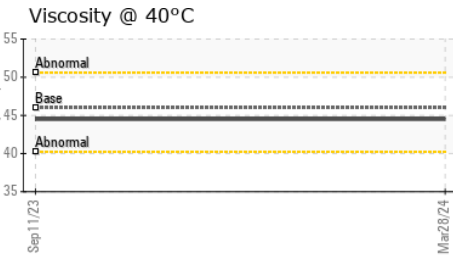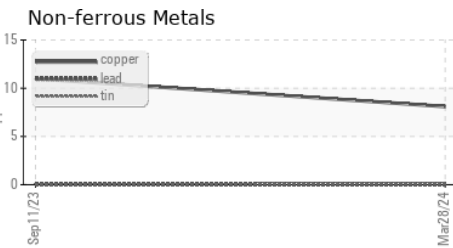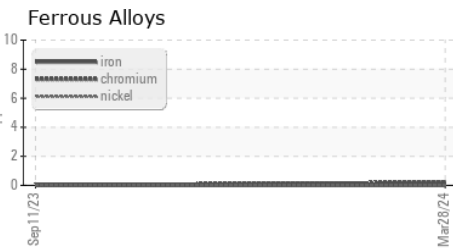

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC130552  
**Lab Number** : 06142289  
**Unique Number** : 10967097  
**Test Package** : IND 2  
**Received** : 08 Apr 2024  
**Tested** : 09 Apr 2024  
**Diagnosed** : 11 Apr 2024 - Don Baldrige

**OKUMA AMERICA**  
 11900 WESTHALL DRIVE PLANT 2  
 CHARLOTTE, NC  
 US 28273  
 Contact: W. MCCONNE  
 wmcconne@okuma.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)