

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id

KAESER 1596183

Component Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug ² 021 Aug ² 022 Ap ² 024				
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016341	KCP49484	KCP21471
Sample Date		Client Info		01 Apr 2024	04 Aug 2022	11 Aug 2021
Machine Age	hrs	Client Info		248	6130	6069
Oil Age	hrs	Client Info		112	61	200
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5	<1	3
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	6	<u>^</u> 22
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	0
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		3	4	1
Calcium	ppm	ASTM D5185m		4	3	0
Phosphorus	ppm	ASTM D5185m	500	416	487	475
Zinc	ppm	ASTM D5185m		85	22	47
Sulfur	ppm	ASTM D5185m		1759	1721	1642
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		0	2	6
Potassium	ppm	ASTM D5185m	>20	<1	0	1
Water	%	ASTM D6304	>0.05	0.007	0.013	0.025
ppm Water	ppm	ASTM D6304	>500	79	135.2	250.5
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		5061	30544	28597
Particles >6μm		ASTM D7647	>1300	953	<u>▲</u> 5645	<u>▲</u> 3573
Particles >14μm		ASTM D7647	>80	52	<u>456</u>	<u> </u>
Particles >21µm		ASTM D7647	>20	11	<u>▲</u> 103	27
Particles >38μm		ASTM D7647	>4	1	<u>^</u> 7	2
Particles >71µm		ASTM D7647		0	1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/17/13	<u>22/20/16</u>	<u> </u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

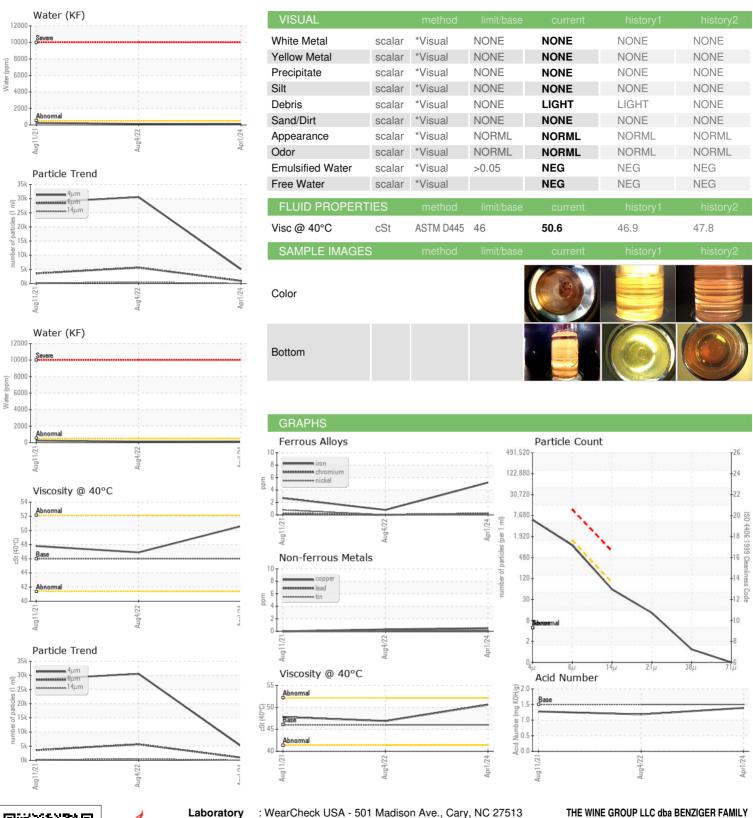





Certificate 12367

Laboratory Sample No. Lab Number

Unique Number : 10967106

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA016341 : 06142298

Received **Tested** Diagnosed

: 08 Apr 2024 : 09 Apr 2024 Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 11 Apr 2024 - Don Baldridge

US 95442 Contact: J. KULINA jkulina@benziger.com T:

GLEN ELLEN, CA

1883 LONDON RANCH RD

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: WINGLE [WUSCAR] 06142298 (Generated: 04/11/2024 23:01:59) Rev: 1

Contact/Location: J. KULINA - WINGLE

F: