

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7611072

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017075	KC85436	
Sample Date		Client Info		04 Apr 2024	08 Apr 2022	
Machine Age	hrs	Client Info		8282	3210	
Oil Age	hrs	Client Info		2986	3210	
Oil Changed		Client Info		N/A	Changed	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm	ASTM D5185m	>10	2	2	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	10	8	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m	210	<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	<1	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	2	21	
Calcium	ppm	ASTM D5185m	0	3	0	
Phosphorus	ppm	ASTM D5185m	0	<1	1	
Zinc	ppm	ASTM D5185m	0	18	72	
Sulfur	ppm	ASTM D5185m	23500	17944	15008	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	2	
Sodium	ppm	ASTM D5185m		0	7	
Potassium	ppm	ASTM D5185m	>20	1	8	
Water	%	ASTM D6304	>0.05	0.007	0.009	
ppm Water	ppm	ASTM D6304	>500	78	99.1	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		651	1370	
Particles >6µm		ASTM D7647	>1300	120	485	
Particles >14µm		ASTM D7647	>80	16	64	
Particles >21µm		ASTM D7647	>20	6	19	
Particles >38µm		ASTM D7647	>4	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>17/13	14/11	16/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.43	0.41	




OIL ANALYSIS REPORT





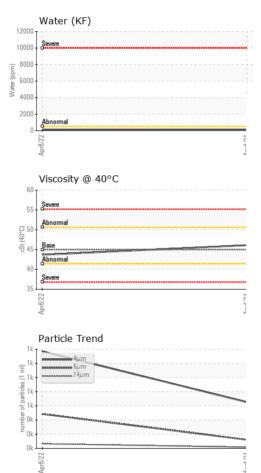

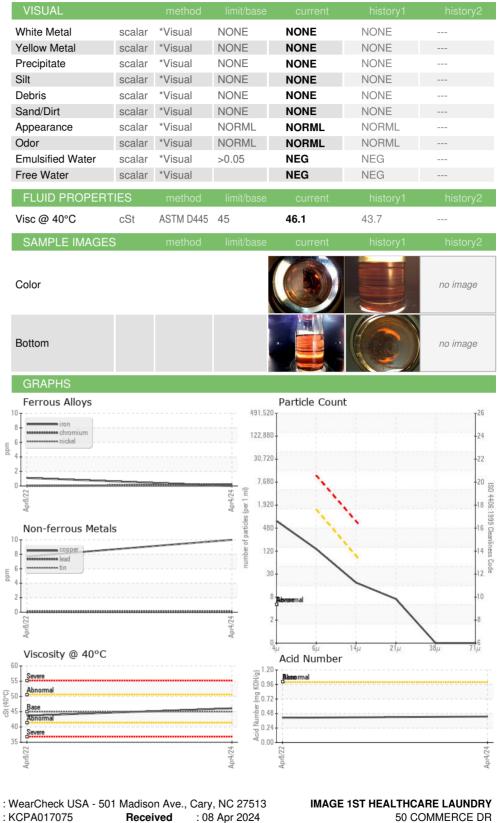



Sample No. : KCPA017075 Received : 08 Apr 2024 Lab Number : 06142313 Tested : 09 Apr 2024 TRUMBULL, CT Unique Number : 10967121 Diagnosed : 10 Apr 2024 - Doug Bogart US 06611 Test Package : IND 2 (Additional Tests: KF, PrtCount) Contact: RYAN S. Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. sryan@imagefirst.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: IMATRU [WUSCAR] 06142313 (Generated: 04/10/2024 09:28:23) Rev: 1

Laboratory

Contact/Location: RYAN S. - IMATRU Page 2 of 2

T:

F: