

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Machine Id **INGERSOLL RAND SWIGRA 3 KAESER (S/N 1130)**

Component Air Compressor Fluid

USPI AIR 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		USPM36648	USP242146	USPM12438		
Sample Date		Client Info		07 Apr 2024	03 Dec 2023	13 May 2019		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				NORMAL	NORMAL	ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	<1	0	0		
Chromium	ppm	ASTM D5185m	>4	<1	0	0		
Nickel	ppm	ASTM D5185m	>4	0	0	<1		
Titanium	ppm	ASTM D5185m		<1	0	0		
Silver	ppm	ASTM D5185m		<1	0	0		
Aluminum	ppm	ASTM D5185m	>10	0	0	<1		
Lead	ppm	ASTM D5185m	>20	0	0	0		
Copper	ppm	ASTM D5185m	>40	<1	0	<1		
Tin	ppm	ASTM D5185m	>5	<1	0	<1		
Antimony	ppm	ASTM D5185m				0		
Vanadium	ppm	ASTM D5185m		<1	0	<1		
Cadmium	ppm	ASTM D5185m		0	0	<1		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	<1		
Barium	ppm	ASTM D5185m	0	<1	0	0		
Molybdenum	ppm	ASTM D5185m	0	0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m	0	<1	0	<1		
Calcium	ppm	ASTM D5185m	0	0	0	0		
Phosphorus	ppm	ASTM D5185m	1	<1	<1	4		
Zinc	ppm	ASTM D5185m	0	0	0	1		
Sulfur	ppm	ASTM D5185m	0	0	5	65		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	0	0	<1		
Sodium	ppm	ASTM D5185m		3	0	0		
Potassium	ppm	ASTM D5185m	>20	2	0	0		
Water	%	ASTM D6304	>0.2	0.046	0.043	0.070		
ppm Water	ppm	ASTM D6304		460	432	700		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	559	3871	6681		
Particles >6µm		ASTM D7647	>2500	150	1142	2296		
Particles >14µm		ASTM D7647	>320	24	81	441		
Particles >21µm		ASTM D7647	>80	6	21	184		
Particles >38µm		ASTM D7647	>20	0	1	15		
Particles >71µm		ASTM D7647	>4	0	0	1		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/14/12	19/17/14	20/18/16		
FLUID DEGRADA		method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.75	0.75 0.64 0.822			


Report Id: SWIGRA [WUSCAR] 06142322 (Generated: 04/10/2024 09:45:16) Rev: 1


Contact/Location: RICK DUVAL - SWIGRA





OIL ANALYSIS REPORT














VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.7	53.5	55.0	53.2
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
					(Tak)	

Bottom

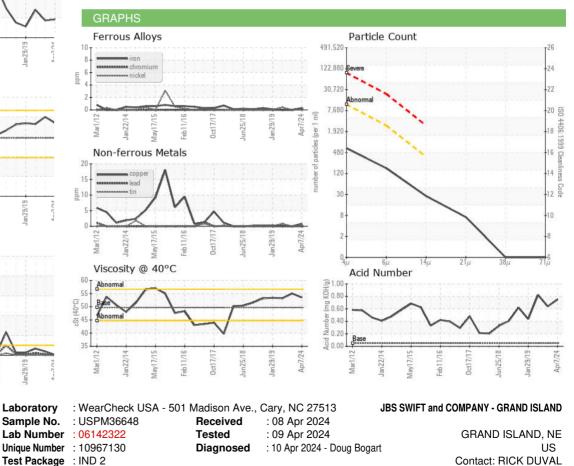

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (402)423-6375 F: (402)423-6661

Report Id: SWIGRA [WUSCAR] 06142322 (Generated: 04/10/2024 09:45:16) Rev: 1

Certificate 12367

Contact/Location: RICK DUVAL - SWIGRA