


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980M 6161 (S/N MK210767)
 Component
Front Left Differential
 Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

Sample Rating Trend

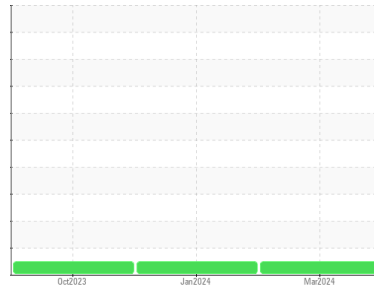

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	TO10003354	TO10003037	TO10002789
Sample Date	Client Info	31 Mar 2024	26 Jan 2024	18 Oct 2023
Machine Age	hrs Client Info	9552	8990	8534
Oil Age	hrs Client Info	1318	756	300
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION method limit/base current history1 history2

Water	WC Method	>.2	NEG	NEG	NEG
-------	-----------	-----	------------	-----	-----

WEAR METALS method limit/base current history1 history2

PQ		ASTM D8184		69	63	21
Iron	ppm	ASTM D5185m	>500	118	86	17
Chromium	ppm	ASTM D5185m	>3	0	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	1
Lead	ppm	ASTM D5185m	>13	0	<1	0
Copper	ppm	ASTM D5185m	>103	9	6	3
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m		2	2	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	3	1
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		27	29	28
Calcium	ppm	ASTM D5185m		2989	2781	2942
Phosphorus	ppm	ASTM D5185m		1072	1037	1020
Zinc	ppm	ASTM D5185m		1250	1195	1236
Sulfur	ppm	ASTM D5185m		7126	6275	6327





CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>100	7	7	7
Sodium	ppm	ASTM D5185m		2	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	0

FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		1.78	1.53	1.47
------------------	----------	------------	--	-------------	------	------

OIL ANALYSIS REPORT





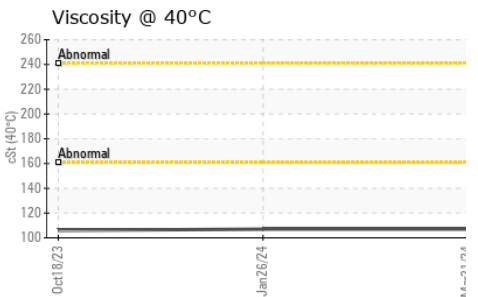
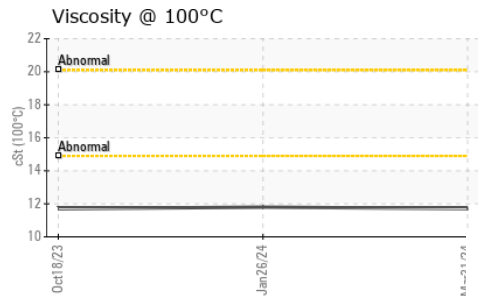
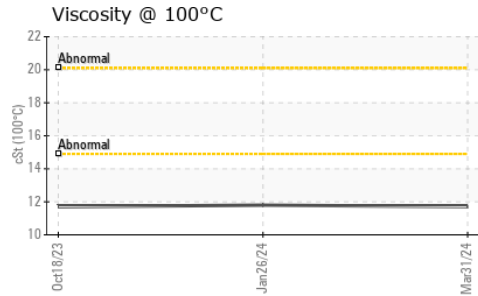
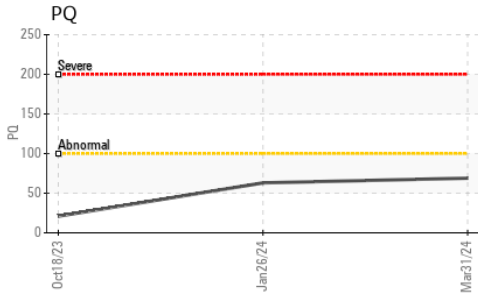


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	107	107	106
Visc @ 100°C	cSt	ASTM D445	11.7	11.8	11.7
Viscosity Index (VI)	Scale	ASTM D2270	96	98	97

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

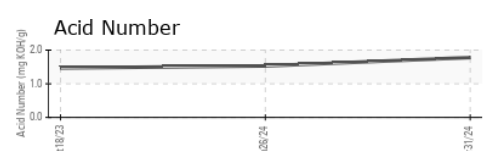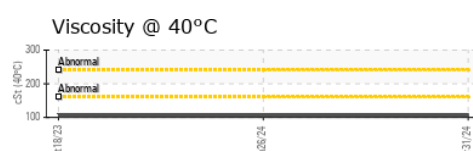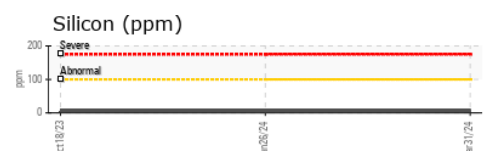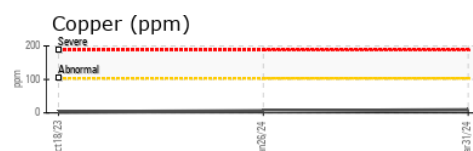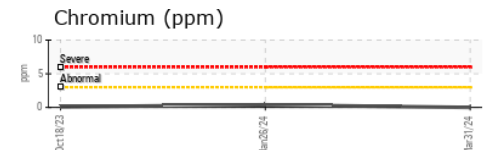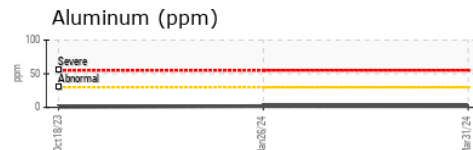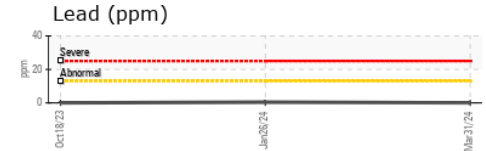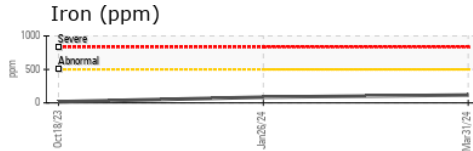

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003354
Lab Number : **06142431**
Unique Number : 10967239
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 08 Apr 2024
Tested : 09 Apr 2024
Diagnosed : 11 Apr 2024 - Jonathan Hester

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (918)928-4575

F: