




# OIL ANALYSIS REPORT

Sample Rating Trend

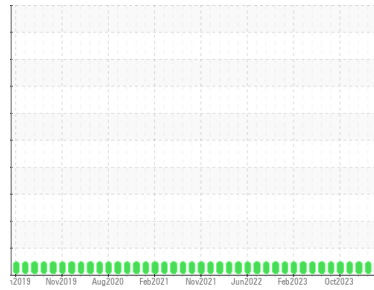

**NORMAL**



Area  
**BRIAN RAFFERTY**  
 Machine Id  
**[BRIAN RAFFERTY] 001 566616-1**  
 Component  
**Port Main Engine**  
 Fluid  
**CHEVRON DELO 710 LE (300 GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>MW0062803</b>	MW0062786	MW0055651
Sample Date	Client Info			<b>01 Apr 2024</b>	01 Feb 2024	01 Dec 2023
Machine Age	hrs Client Info			<b>22945</b>	21481	20065
Oil Age	hrs Client Info			<b>22945</b>	21481	20065
Oil Changed	Client Info			<b>Not Changed</b>	Not Changd	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>75		<b>17</b>	29	22
Chromium	ppm ASTM D5185m	>8		<b>1</b>	2	2
Nickel	ppm ASTM D5185m	>2		<b>0</b>	0	<1
Titanium	ppm ASTM D5185m	>3		<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m	>2		<b>0</b>	0	0
Aluminum	ppm ASTM D5185m	>15		<b>2</b>	2	2
Lead	ppm ASTM D5185m	>18		<b>8</b>	11	9
Copper	ppm ASTM D5185m	>80		<b>42</b>	29	23
Tin	ppm ASTM D5185m	>14		<b>6</b>	8	7
Vanadium	ppm ASTM D5185m			<b>0</b>	<1	<1
Cadmium	ppm ASTM D5185m			<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m			<b>40</b>	48	41
Barium	ppm ASTM D5185m			<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m			<b>48</b>	52	51
Manganese	ppm ASTM D5185m			<b>2</b>	2	2
Magnesium	ppm ASTM D5185m			<b>14</b>	18	17
Calcium	ppm ASTM D5185m			<b>3387</b>	3397	3426
Phosphorus	ppm ASTM D5185m			<b>0</b>	5	8
Zinc	ppm ASTM D5185m	10		<b>12</b>	6	0
Sulfur	ppm ASTM D5185m			<b>2166</b>	2429	2710




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20		<b>6</b>	11	7
Sodium	ppm ASTM D5185m	>75		<b>4</b>	67	3
Potassium	ppm ASTM D5185m	>20		<b>1</b>	3	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3		<b>0.8</b>	0.8	0.8
Nitration	Abs/cm *ASTM D7624	>20		<b>8.7</b>	8.4	8.9
Sulfation	Abs/.1mm *ASTM D7415	>30		<b>17.5</b>	17.6	18.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25		<b>9.1</b>	8.9	9.6
Base Number (BN)	mg KOH/g ASTM D2896	9.2		<b>8.43</b>	7.12	6.4







# OIL ANALYSIS REPORT

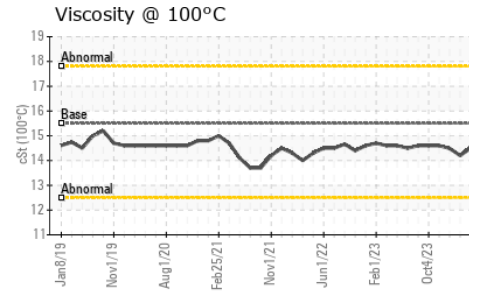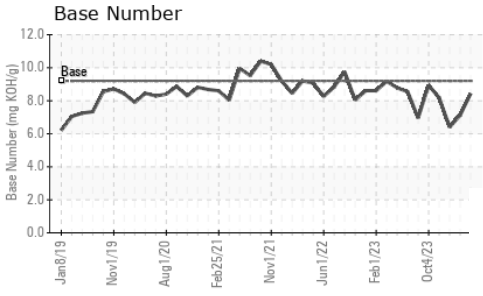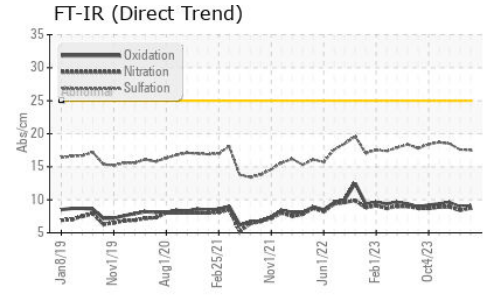

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	14.5	14.2

## GRAPHS

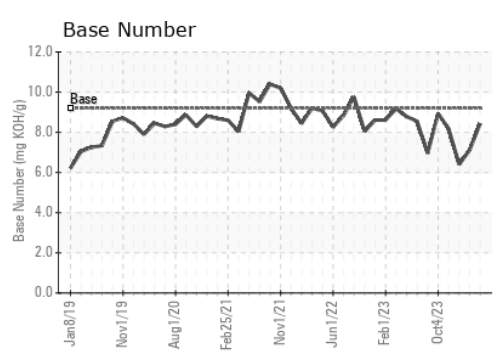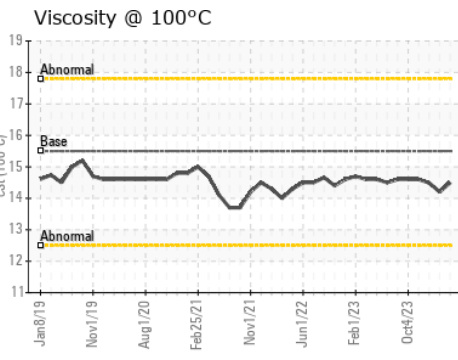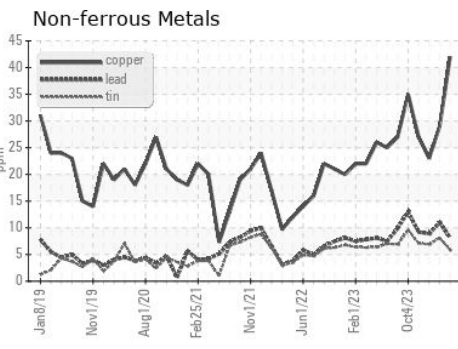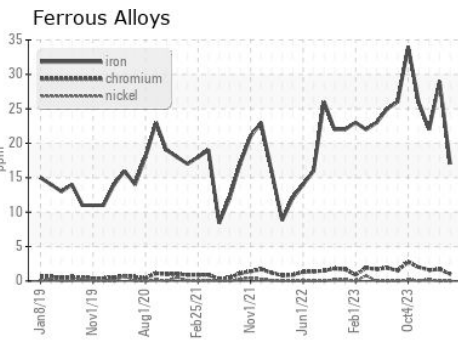

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0062803      **Received** : 08 Apr 2024  
**Lab Number** : **06142457**      **Tested** : 09 Apr 2024  
**Unique Number** : 10967265      **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003  
 Contact: RANDAL KEEN  
 randal.keen@ingrambarga.com  
 T:  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)