


OIL ANALYSIS REPORT

LOG LINE

DEBARKER STORAGE TANK - AW 100 (S/N DE005T05)

Bulk Fluid Tank

AW HYDRAULIC OIL ISO 100 (--- GAL)



DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06142587	WC0782929	WC0783017
Sample Date		Client Info		04 Apr 2024	28 Dec 2023	31 Aug 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		0	0	<1
Chromium	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m		<1	0	0
	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m		0	0	0
	ppm	ASTM D5185m		<1	0	0
	ppm	ASTM D5185m		0	0	0
_	ppm	ASTM D5185m		0	<1	<1
		ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
	ppm			-		
	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	1	<1
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	4	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	25	69	67	64
Calcium	ppm	ASTM D5185m	200	28	25	26
Phosphorus	ppm	ASTM D5185m	300	255	287	324
Zinc	ppm	ASTM D5185m	370	325	358	371
Sulfur	ppm	ASTM D5185m	2500	407	714	1204
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<1	<1	1
Sodium	ppm	ASTM D5185m		2	1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	1483	<u></u> 1802	<u> </u>
Particles >6µm		ASTM D7647	>160	<u>^</u> 249	▲ 476	<u></u> 525
Particles >14µm		ASTM D7647	>20	23	<u>^</u> 21	<u>^</u> 22
Particles >21µm		ASTM D7647	>4	<u>^</u> 6	<u></u> 5	<u></u> 5
Particles >38µm		ASTM D7647	>3	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/11	▲ 18/15/12	▲ 18/16/12	▲ 18/16/12
FLUID DEGRADAT	ΓΙΟΝ	method	limit/base	current	history1	history2
				53		

Contact/Location: Ted Hudson - JMHCRY



OIL ANALYSIS REPORT







Viscosity @ 100°C

12

Ba





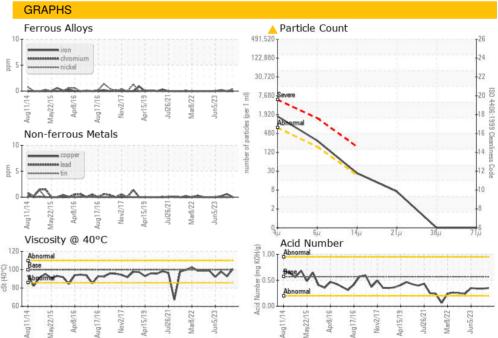





Certificate 12367

Sample No.

Laboratory

Lab Number

: WC06142587 : 06142587 Unique Number : 10967395

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Apr 2024 **Tested** : 10 Apr 2024

Diagnosed : 11 Apr 2024 - Jonathan Hester

Test Package: IND 2 (Additional Tests: KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

J.M. Huber Corporation PO BOX 38

CRYSTAL HILL, VA US 24539 Contact: Ted Hudson

ted.hudson@huber.com T: (434)476-3550

F: (434)476-8133