




OIL ANALYSIS REPORT



Area
BARGE TRANSPORTATION
 Machine Id
ROGER WILLIAMSON - SME (S/N SDN01038)
 Component
Starboard Main Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

Sample Rating Trend

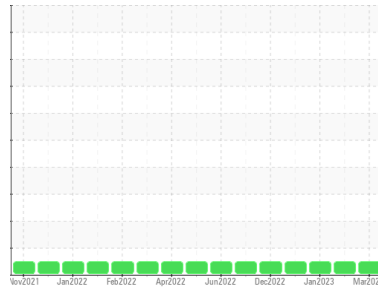

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KFS0002998	KFS0003168	KFS0002851
Sample Date	Client Info		14 Mar 2024	24 Apr 2023	24 Jan 2023
Machine Age	hrs	Client Info	500	41762	39812
Oil Age	hrs	Client Info	500	900	500
Oil Changed	Client Info		Diff Oil	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	4	4	2
Chromium	ppm	ASTM D5185m >10	1	<1	<1
Nickel	ppm	ASTM D5185m >5	2	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >5	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	<1	<1
Lead	ppm	ASTM D5185m >40	1	0	<1
Copper	ppm	ASTM D5185m >300	3	2	<1
Tin	ppm	ASTM D5185m >10	1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	6	7
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	54	59	60
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	912	984	927
Calcium	ppm	ASTM D5185m	1050	1042	1045
Phosphorus	ppm	ASTM D5185m	1039	1058	1001
Zinc	ppm	ASTM D5185m	1198	1284	1195
Sulfur	ppm	ASTM D5185m	3319	3850	3724

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	2	2
Sodium	ppm	ASTM D5185m	2	2	1
Potassium	ppm	ASTM D5185m >20	2	0	0


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.3	8.6	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.1	19.3	18.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.3	18.1	14.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.8	7.6	9.8


FT-IR (Direct Trend)

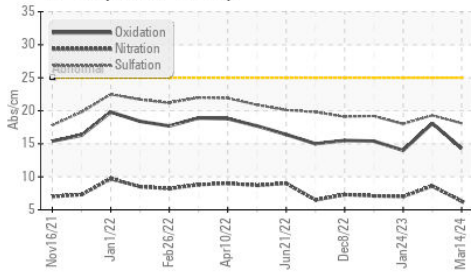

Base Number

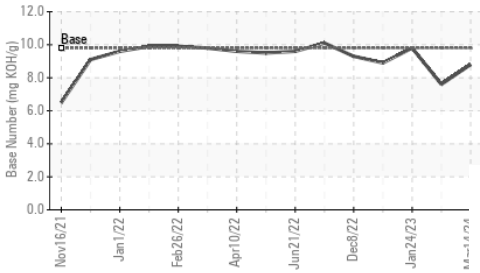

Viscosity @ 100°C

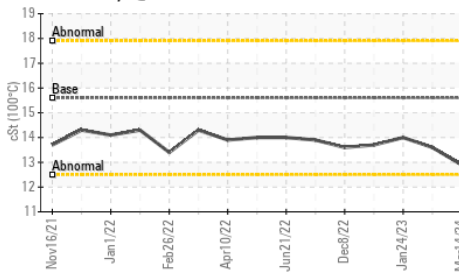


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	12.9	13.6

GRAPHS


Ferrous Alloys

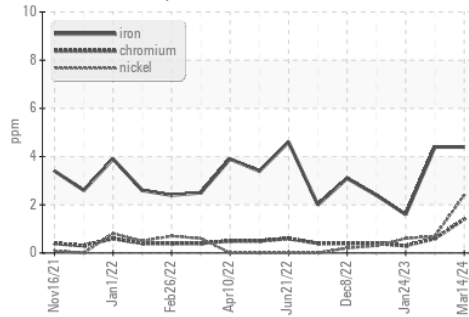


Non-ferrous Metals

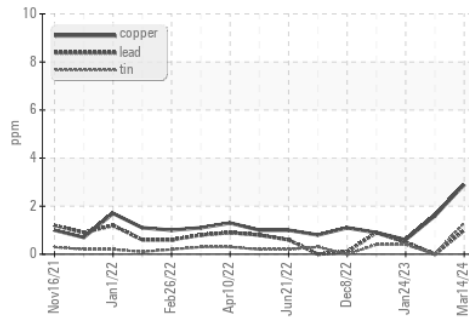

Viscosity @ 100°C

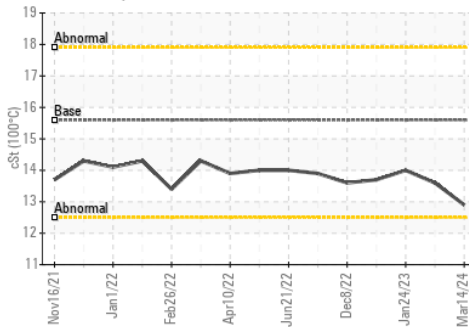

Base Number

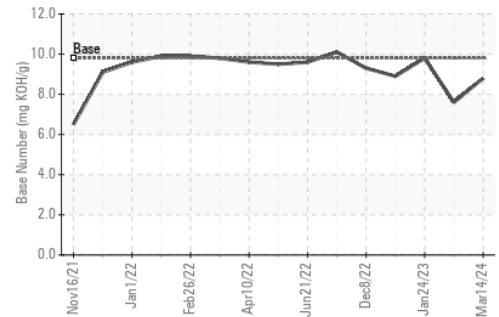

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0002998 **Received** : 09 Apr 2024
Lab Number : 06142860 **Tested** : 10 Apr 2024
Unique Number : 10967668 **Diagnosed** : 10 Apr 2024 - Wes Davis
Test Package : FLEET

M/V ROGER WILLIAMSON
 3501 STARLITE DR
 PADUCAH, KY
 US 42003
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: