




OIL ANALYSIS REPORT

Sample Rating Trend

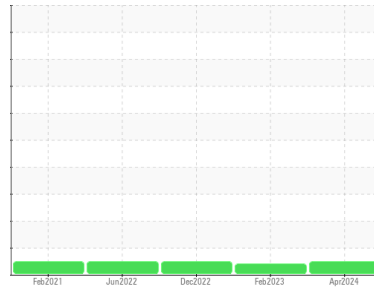

NORMAL



Area
KANSAS/44/EG - TRUCK-ON-HWY-HEAVY DUTY
 Machine Id
06.72 [KANSAS^44^EG - TRUCK-ON-HWY-HEAVY DUTY]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0918143	WC0741724	WC0741843
Sample Date	Client Info			01 Apr 2024	21 Feb 2023	07 Dec 2022
Machine Age	hrs	Client Info		82831	1093	82831
Oil Age	hrs	Client Info		0	82831	4012
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	1.9	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	21	42	28
Chromium	ppm	ASTM D5185m	>20	2	1	2
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	16	39	5
Lead	ppm	ASTM D5185m	>40	<1	1	0
Copper	ppm	ASTM D5185m	>330	2	37	2
Tin	ppm	ASTM D5185m	>15	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	31	17	48
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	41	62	41
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m	0	492	815	506
Calcium	ppm	ASTM D5185m		1677	1311	1762
Phosphorus	ppm	ASTM D5185m		759	956	797
Zinc	ppm	ASTM D5185m		926	1277	960
Sulfur	ppm	ASTM D5185m		2531	3216	3124




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	13	18
Sodium	ppm	ASTM D5185m		3	3	2
Potassium	ppm	ASTM D5185m	>20	38	94	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.4	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.1	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	22.0	23.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.9	19.5	21.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.8	10.0	11.5







OIL ANALYSIS REPORT

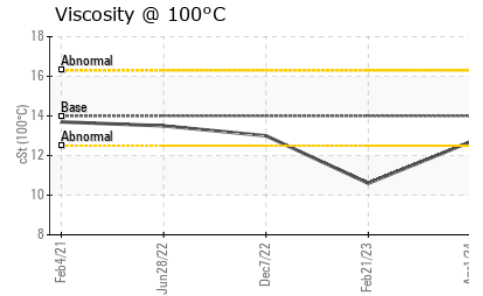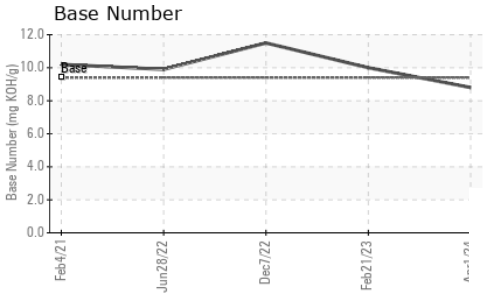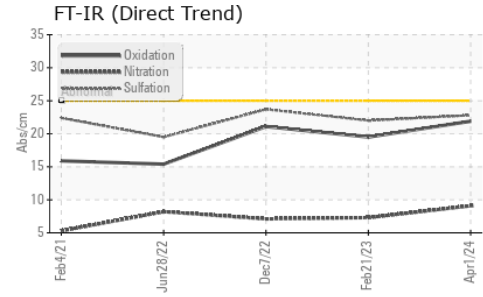

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	12.7	10.6	13.0

GRAPHS

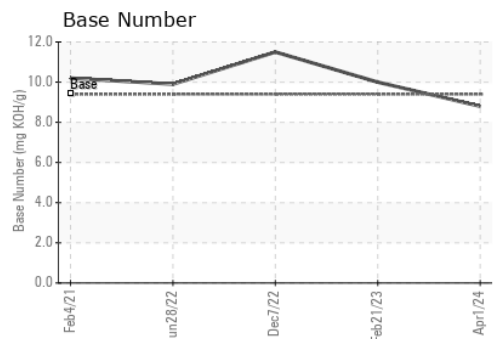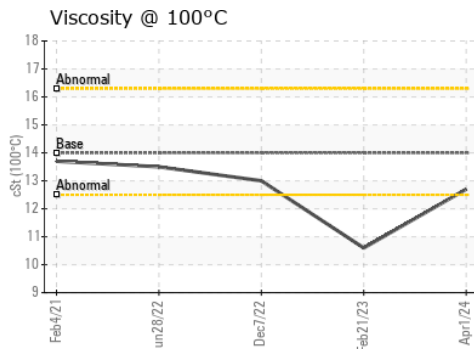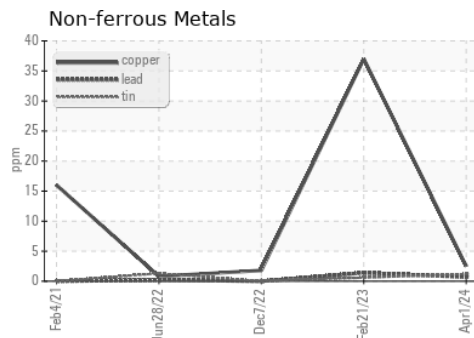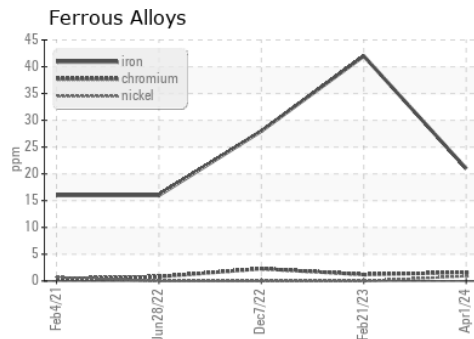

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918143 **Received** : 09 Apr 2024
Lab Number : 06142892 **Tested** : 10 Apr 2024
Unique Number : 10967700 **Diagnosed** : 10 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)