

OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id
141325
Component
Hydraulic System
Fluid

LIEBHERR HYDRAULIC 37 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Woor

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Mar2024 | | |
|--|-------------------|--|---|--|-------------------|-------------------|
| CAMPLE INCOR | MATION | | line:b/le = = = | | la i a ta un c | history.O |
| SAMPLE INFOR | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | LM0001411 | | |
| Sample Date | | Client Info | | 26 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 17083 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIC | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 9 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >75 | 27 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 18 | | |
| Calcium | ppm | ASTM D5185m | | 99 | | |
| Phosphorus | ppm | ASTM D5185m | | 309 | | |
| Zinc | ppm | ASTM D5185m | | 376 | | |
| Sulfur | ppm | ASTM D5185m | | | | |
| | le le | AO IIVI DO IOOIII | | 2322 | | |
| CONTAMINANT | | method | limit/base | current | history1 | history2 |
| CONTAMINANT | | method | limit/base >20 | | | |
| | S ppm | method | | current | history1 | history2 |
| Silicon | S | method ASTM D5185m | >20 | current 2 | history1 | history2 |
| Silicon Sodium | ppm ppm ppm | method ASTM D5185m ASTM D5185m | >20 | current 2 2 | history1 | history2 |
| Silicon Sodium Potassium | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m | >20 >20 | current 2 2 0 | history1 | history2 |
| Silicon Sodium Potassium FLUID CLEANLII | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method | >20 >20 limit/base | current 2 2 0 current | history1 | history2 |
| Silicon Sodium Potassium FLUID CLEANLII Particles >4µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 | >20 >20 limit/base >20000 | current 2 2 0 current 14910 | history1 | history2 |
| Silicon Sodium Potassium FLUID CLEANLII Particles >4µm Particles >6µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 | >20 >20 limit/base >20000 >5000 | current 2 2 0 current 14910 1367 | history1 history1 | history2 history2 |
| Silicon Sodium Potassium FLUID CLEANLII Particles >4µm Particles >6µm Particles >14µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >20000 >5000 >640 | current 2 2 0 current 14910 1367 64 | history1 history1 | history2 history2 |
| Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >20 limit/base >20000 >5000 >640 >160 | current 2 2 0 current 14910 1367 64 26 | history1 history1 | history2 history2 |
| Silicon Sodium Potassium FLUID CLEANLI Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 simit/base >20000 >5000 >640 >160 >40 | current 2 2 0 current 14910 1367 64 26 4 | history1 history1 | history2 history2 |
| Silicon Sodium Potassium FLUID CLEANLII Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 | >20 simit/base | current 2 2 0 current 14910 1367 64 26 4 0 | history1 history1 | history2 history2 |



OIL ANALYSIS REPORT

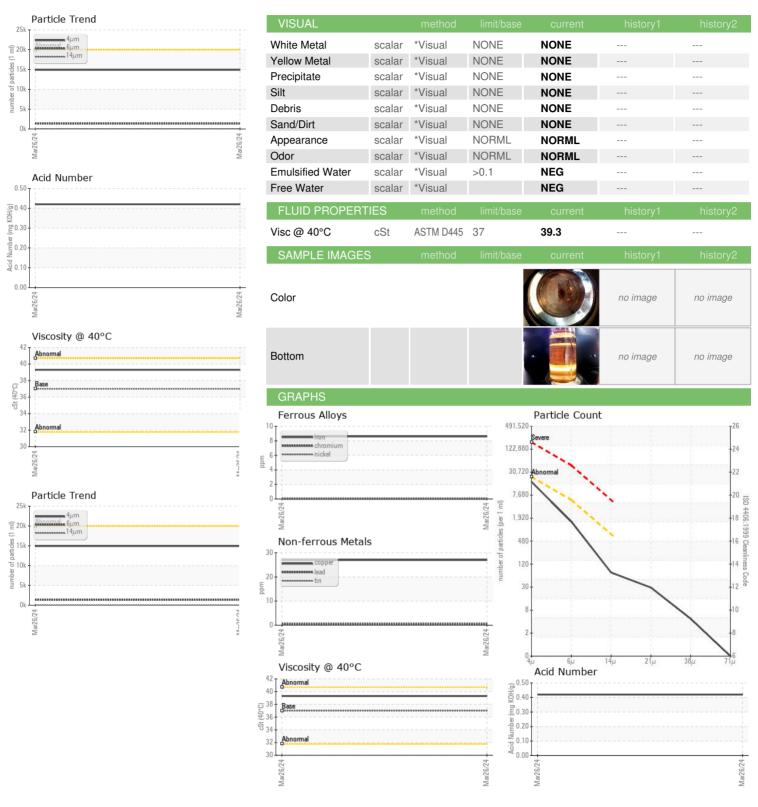





Certificate 12367

Laboratory Sample No. Lab Number : 06142977 Unique Number : 10967785 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : LM0001411

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received : 09 Apr 2024 **Tested** : 10 Apr 2024 Diagnosed

: 10 Apr 2024 - Wes Davis

HIALEAH GARDENS, FL US 33018 Contact: RONNY FUNK ronny.funk@liebherr.com T: (305)817-7566

15101 NW 112TH AVE

LIEBHERR USA CO - Maritime Cranes

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: RONNY FUNK - LIEHIA