




# OIL ANALYSIS REPORT

Sample Rating Trend

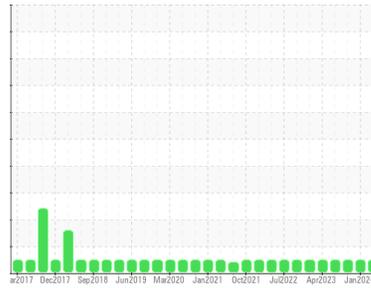

**NORMAL**

Area  
**RING CONTAINER**  
Machine Id  
**VARIABLE E PUMP**  
Component  
**Hydraulic System**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

**Recommendation**  
Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**  
All component wear rates are normal.

**Contamination**  
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0892705</b>	WC0877696	WC0855525
Sample Date	Client Info			<b>02 Apr 2024</b>	25 Jan 2024	18 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>4</b>	3	13
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>4</b>	3	9
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>135</b>	139	70
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	0
Calcium	ppm	ASTM D5185m		<b>45</b>	34	17
Phosphorus	ppm	ASTM D5185m		<b>445</b>	446	324
Zinc	ppm	ASTM D5185m		<b>409</b>	395	210
Sulfur	ppm	ASTM D5185m		<b>1986</b>	1647	2102

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>2</b>	1	4
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	1


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>424</b>	1546	653	
Particles >6µm	ASTM D7647	>1300	<b>95</b>	269	149	
Particles >14µm	ASTM D7647	>160	<b>12</b>	17	16	
Particles >21µm	ASTM D7647	>40	<b>4</b>	4	5	
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	0	
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>16/14/11</b>	18/15/11	17/14/11	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.57</b>	0.618	0.47


### Particle Trend

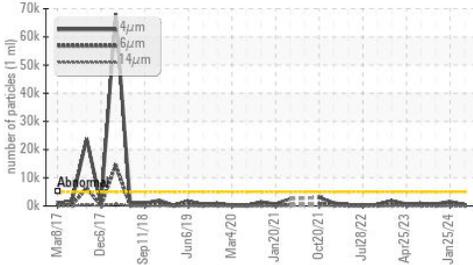


### Acid Number

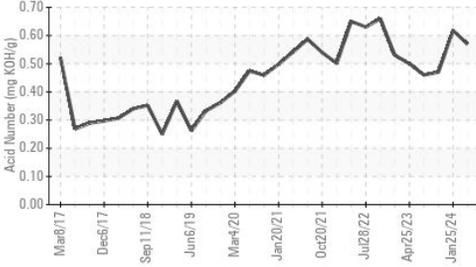

### Viscosity @ 40°C

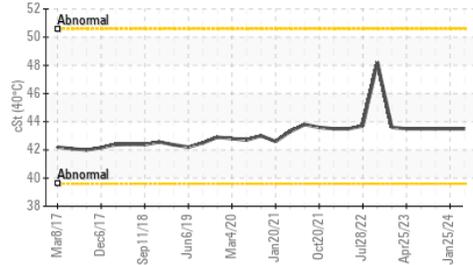

### Particle Trend

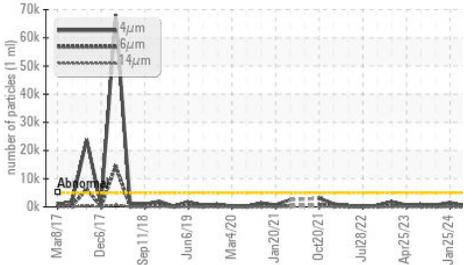


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.5	43.5	43.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



### GRAPHS

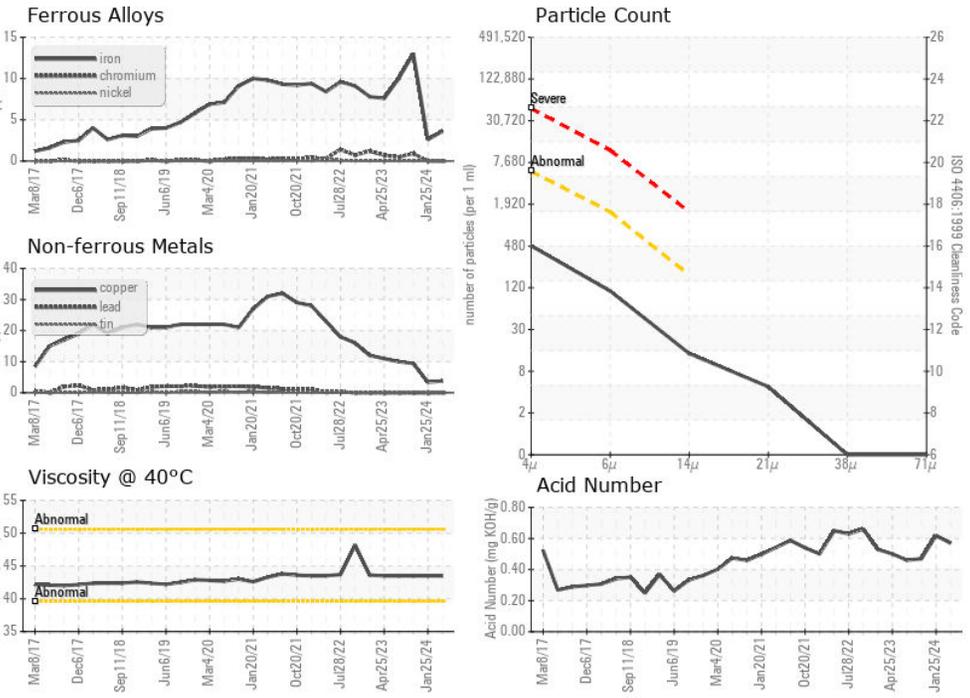

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0892705  
**Lab Number** : 06142999  
**Unique Number** : 10967807  
**Test Package** : IND 2  
**Received** : 09 Apr 2024  
**Tested** : 10 Apr 2024  
**Diagnosed** : 10 Apr 2024 - Wes Davis

**MOTOR TECHNOLOGY INC**  
 515 WILLOW SPRINGS LN  
 YORK, PA  
 US 17406  
 Contact: Bill Trimmer  
 btrimmer@motortechinc.com  
 T: (717)266-4045  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)