




# OIL ANALYSIS REPORT

Sample Rating Trend

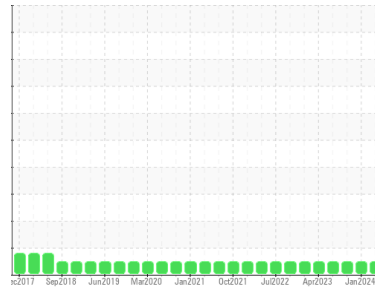

**NORMAL**



Area  
**RING CONTAINER**  
 Machine Id  
**EXTRUDER A**  
 Component  
**Pump**  
 Fluid  
**SHELL TELLUS 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0892745</b>	WC0891199	WC0855535
Sample Date	Client Info	<b>02 Apr 2024</b>	25 Jan 2024	18 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>&gt;.1</b>	<b>NEG</b>	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>90	<b>10</b>	9	11
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>7	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>12	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>7</b>	8	9
Tin	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>86</b>	84	78
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	11	<b>0</b>	0	<1
Calcium	ppm	ASTM D5185m	35	<b>25</b>	14	23
Phosphorus	ppm	ASTM D5185m	266	<b>319</b>	312	327
Zinc	ppm	ASTM D5185m	276	<b>202</b>	191	258
Sulfur	ppm	ASTM D5185m	1847	<b>2454</b>	2097	2200

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>60	<b>2</b>	2	2
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	1

## FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>5000	<b>959</b>	2297	365
Particles >6µm	ASTM D7647	>1300	<b>186</b>	354	110
Particles >14µm	ASTM D7647	>160	<b>19</b>	21	11
Particles >21µm	ASTM D7647	>40	<b>6</b>	6	4
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/15/11</b>	18/16/12	16/14/11


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.36	<b>0.50</b>	0.424	0.55




# OIL ANALYSIS REPORT


Particle Trend

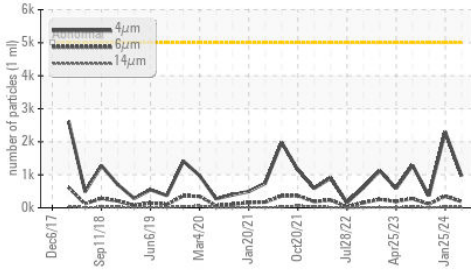


Acid Number

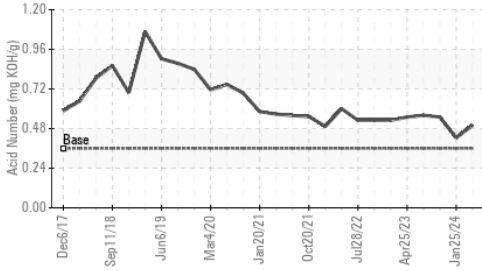

Viscosity @ 40°C

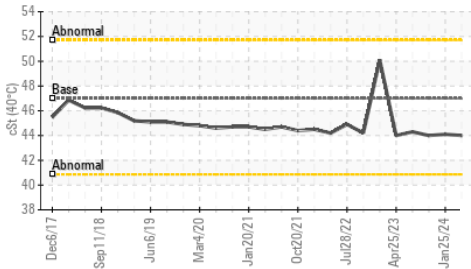


Particle Trend

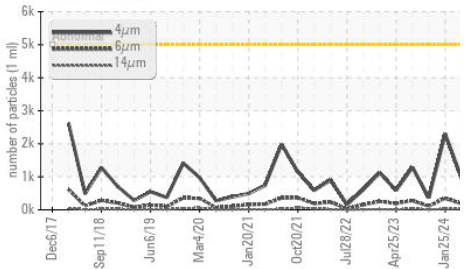






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.99	44.0	44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

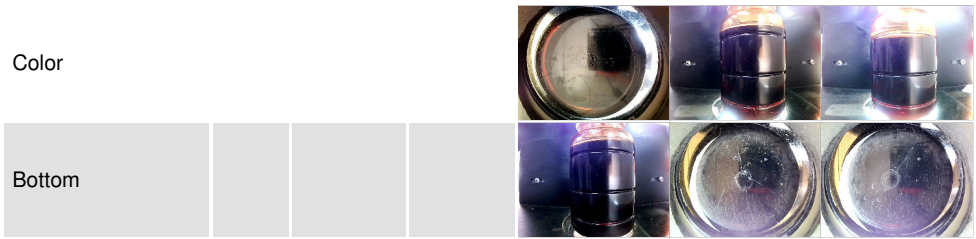

## GRAPHS

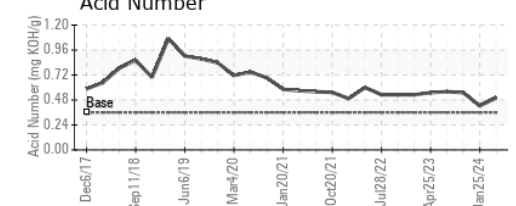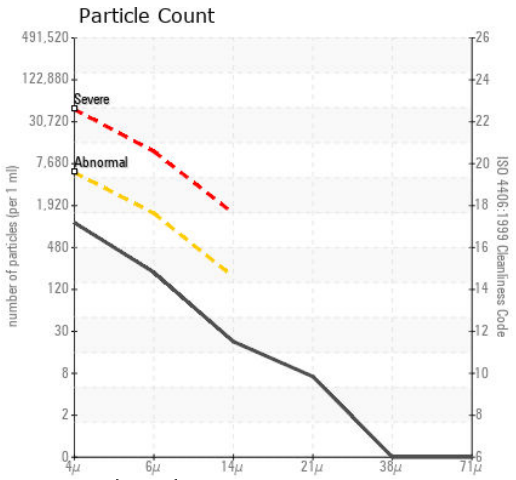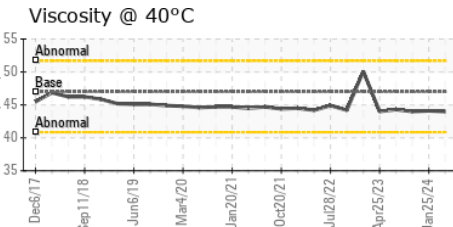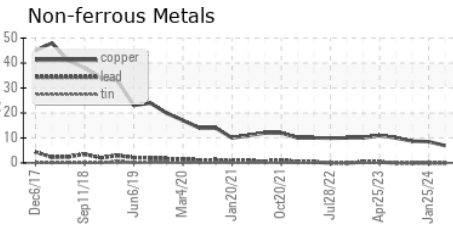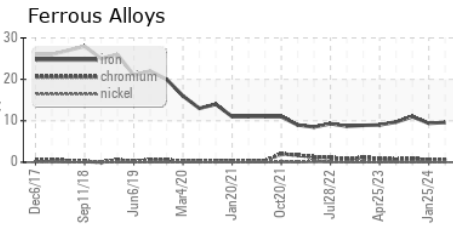

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0892745 **Received** : 09 Apr 2024  
**Lab Number** : 06143000 **Tested** : 10 Apr 2024  
**Unique Number** : 10967808 **Diagnosed** : 11 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

**MOTOR TECHNOLOGY INC**  
 515 WILLOW SPRINGS LN  
 YORK, PA  
 US 17406

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)