

OIL ANALYSIS REPORT

Area RING CONTAINER Machine Id EXTRUDER Q

Hydraulic System Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sample Rating Trend


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0892738	WC0891188	WC0855529
Sample Date		Client Info		02 Apr 2024	25 Jan 2024	18 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	10	9	8
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	6	6	5
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m	220	<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES	1-1-	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		140	146	148
Manganese	ppm	ASTM D5185m		<1	0	0
		ASTM D5185m		0	0	<1
waunesium	ppm			-		
Magnesium Calcium	ppm mag	ASTM D5185m		52	41	
Calcium	ppm	ASTM D5185m ASTM D5185m		52 436	41	50
Calcium Phosphorus	ppm ppm	ASTM D5185m		436	41 436	50 428
Calcium	ppm			-	41	50
Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	limit/base	436 406	41 436 395	50 428 453
Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		436 406 2087	41 436 395 1735	50 428 453 1848
Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method		436 406 2087 current	41 436 395 1735 history1	50 428 453 1848 history2
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	>15	436 406 2087 current 7	41 436 395 1735 history1 6	50 428 453 1848 history2 6
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	>15	436 406 2087 current 7 1	41 436 395 1735 history1 6 0	50 428 453 1848 history2 6 0
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>15 >20	436 406 2087 current 7 1 0	41 436 395 1735 history1 6 0 0	50 428 453 1848 history2 6 0 1
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m method	>15 >20 limit/base >5000	436 406 2087 current 7 1 0 current	41 436 395 1735 history1 6 0 0 0 history1	50 428 453 1848 history2 6 0 1 1 history2
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647	>15 >20 limit/base >5000	436 406 2087 current 7 1 0 current 1485	41 436 395 1735 history1 6 0 0 0 history1 537	50 428 453 1848 history2 6 0 1 1 history2 6242
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160	436 406 2087 current 7 1 0 current 1485 420	41 436 395 1735 history1 6 0 0 0 history1 537 131	50 428 453 1848 history2 6 0 1 1 history2 6 6242 436
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160	436 406 2087 current 7 1 0 current 1485 420 38	41 436 395 1735 history1 6 0 0 0 history1 537 131 9	50 428 453 1848 history2 6 0 1 1 history2 6 242 436 29
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160 >40 >10	436 406 2087 current 7 1 0 current 1485 420 38 7	41 436 395 1735 history1 6 0 0 history1 537 131 9 2	50 428 453 1848 history2 6 0 1 1 history2 6 242 436 29 9
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160 >40 >10	436 406 2087 current 7 1 0 current 1485 420 38 7 0	41 436 395 1735 history1 6 0 0 history1 537 131 9 2 2 0	50 428 453 1848 history2 6 0 1 1 history2 6 29 9 9 0
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >4µm Particles >14µm Particles >38µm Particles >71µm	ppm ppm ppm ppm ppm ppm ppm NESS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >5000 >1300 >160 >40 >10 >3	436 406 2087 current 7 1 0 current 1485 420 38 7 0 0 0	41 436 395 1735 history1 6 0 0 history1 537 131 9 2 2 0 0 0	50 428 453 1848 6 0 1 1 history2 6 6242 436 29 9 9 0 0 0
Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm ppm ppm ppm ppm ppm NESS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>15 >20 limit/base >5000 >1300 >160 >40 >10 >3 >19/17/14	436 406 2087 current 7 1 0 current 1485 420 38 7 0 0 0 18/16/12	41 436 395 1735 history1 6 0 0 history1 537 131 9 2 2 0 0 0 0 16/14/10	50 428 453 1848 6 0 1 1 history2 6 6242 436 29 9 0 0 0 0 20/16/12


Report Id: MOTYOR [WUSCAR] 06143003 (Generated: 04/10/2024 10:34:20) Rev: 1


ntted By: Bill Trimme



OIL ANALYSIS REPORT

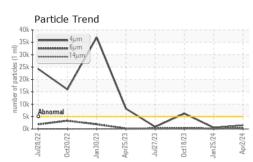

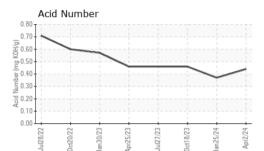

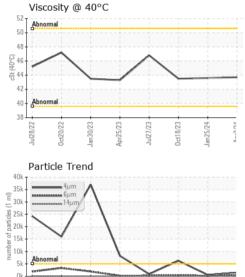


Apr25/23

Jan 30/23

Jul27/23

Oct18/23

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
FLUID PROPERT Visc @ 40°C	TES cSt	method ASTM D445	limit/base	current 43.7	history1 43.6	history2 43.5
	cSt		limit/base limit/base			
Visc @ 40°C	cSt	ASTM D445		43.7	43.6	43.5

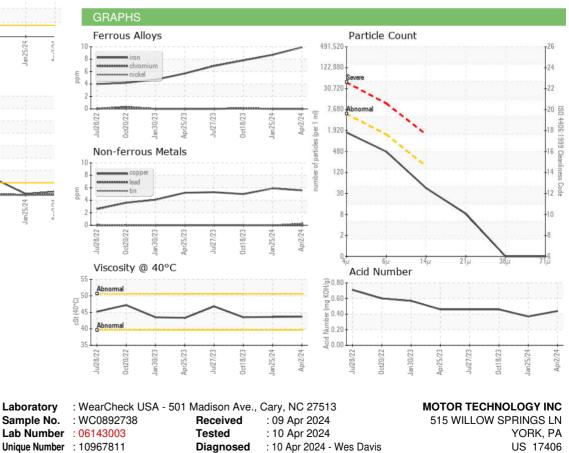

Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MOTYOR [WUSCAR] 06143003 (Generated: 04/10/2024 10:34:20) Rev: 1

Certificate 12367

Submitted By: Bill Trimmer

btrimmer@motortechnologyinc.com

Contact: Bill Trimmer

T: (717)266-4045

F: