

OIL ANALYSIS REPORT

Area **RING CONTAINER EXTRUDER L - MAIN PLANT**

Hydraulic System SHELL TELLUS 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear


All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0892743	WC0891193	WC0855534	
Sample Date		Client Info		02 Apr 2024	25 Jan 2024	18 Oct 2023	
Machine Age	hrs	Client Info		0	0	0	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	NORMAL	
CONTAMINATION	I	method	limit/base	current	history1	history2	
Water		WC Method	>0.05	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	2	1	14	
Chromium	ppm	ASTM D5185m	>20	0	0	<1	
Nickel	ppm	ASTM D5185m	>20	0	0	0	
Titanium	ppm	ASTM D5185m		0	<1	0	
Silver	ppm	ASTM D5185m		0	0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	<1	
Lead	ppm	ASTM D5185m	>20	0	0	0	
Copper	ppm	ASTM D5185m	>20	<1	1	5	
Tin	ppm	ASTM D5185m	>20	<1	0	<1	
Vanadium	ppm	ASTM D5185m		<1	0	0	
Cadmium	ppm	ASTM D5185m		0	0	<1	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0.0	0	0	0	
Barium	ppm	ASTM D5185m	0	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	147	153	100	
Manganese	ppm	ASTM D5185m		0	0	0	
Magnesium	ppm	ASTM D5185m	11	<1	0	<1	
Calcium	ppm	ASTM D5185m	35	45	36	27	
Phosphorus	ppm	ASTM D5185m	266	462	462	343	
Zinc	ppm	ASTM D5185m	276	441	427	267	
Sulfur	ppm	ASTM D5185m	1847	1930	1579	1699	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	2	2	4	
Sodium	ppm	ASTM D5185m		<1	0	1	
Potassium	ppm	ASTM D5185m	>20	0	0	2	
FLUID CLEANLINI	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	572	1723	1167	
Particles >6µm		ASTM D7647	>1300	89	318	174	
Particles >14µm		ASTM D7647	>160	10	20	14	
Particles >21µm		ASTM D7647	>40	4	6	3	
Particles >38µm		ASTM D7647	>10	0	0	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/10	18/15/11	17/15/11	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.36	0.68	0.690	0.52	
):33:24) Bev: 1					Submitted By: Bill Trimmer		


Report Id: MOTYOR [WUSCAR] 06143012 (Generated: 04/10/2024 10:33:24) Rev: 1


Submitted By: Bill Trimmer


Page 1 of 2




OIL ANALYSIS REPORT










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.99	43.4	44.9	43.9
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

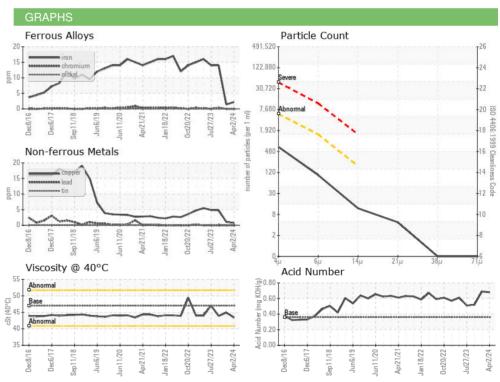

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 MOTOR TECHNOLOGY INC Sample No. : WC0892743 Received : 09 Apr 2024 515 WILLOW SPRINGS LN Lab Number : 06143012 Tested : 10 Apr 2024 YORK, PA Unique Number : 10967820 Diagnosed : 10 Apr 2024 - Wes Davis US 17406 Test Package : IND 2 Contact: Bill Trimmer Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. btrimmer@motortechnologyinc.com T: (717)266-4045

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MOTYOR [WUSCAR] 06143012 (Generated: 04/10/2024 10:33:24) Rev: 1

Submitted By: Bill Trimmer

Page 2 of 2

F: