



Machine Id  
**TA-5 REDUCER**  
Component  
**Gearbox**  
Fluid  
**CHEVRON MEROPA 220 (20 GAL)**

Sample Rating Trend

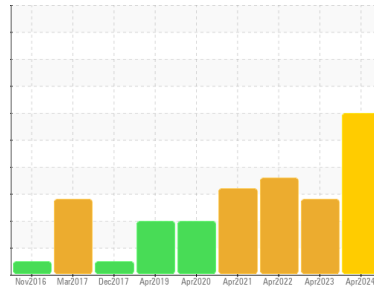

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

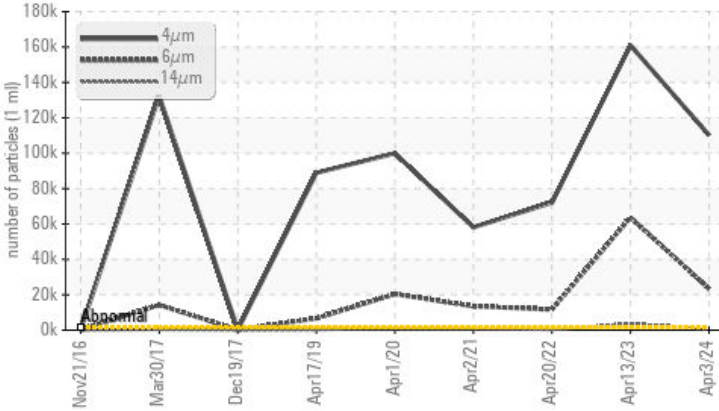

## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

## PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	ABNORMAL	SEVERE
Particles >4µm	ASTM D7647	>1300	▲ 110154	▲ 160973	▲ 72122
Particles >6µm	ASTM D7647	>320	▲ 23447	▲ 63643	▲ 11656
Particles >14µm	ASTM D7647	>80	▲ 643	▲ 3671	▲ 288
Particles >21µm	ASTM D7647	>20	▲ 117	▲ 562	▲ 47
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 24/22/17	▲ 25/23/19	▲ 23/21/15

Customer Id: HYDBELFL  
Sample No.: ST46892  
Lab Number: 06143047  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

## HISTORICAL DIAGNOSIS



### 13 Apr 2023 Diag: Jonathan Hester

We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. Please note that this is a corrected copy for diagnostic comment updates. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



### 20 Apr 2022 Diag: Wes Davis

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Particles >6µm are severely high. Particles >4µm are severely high. Particles >14µm are abnormally high. Particles >21µm are abnormally high. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)




### 02 Apr 2021 Diag: Jonathan Hester

We advise that you check for the source of water entry. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. All component wear rates are normal. There is a high amount of particulates present in the oil. There is a moderate concentration of water present in the oil. The AN level is acceptable for this fluid.

[view report](#)



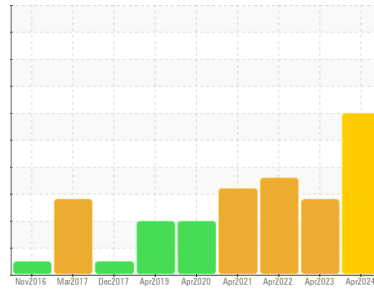

Machine Id  
**TA-5 REDUCER**  
 Component  
**Gearbox**  
 Fluid  
**CHEVRON MEROPA 220 (20 GAL)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST46892</b>	ST44815	ST42842
Sample Date	Client Info			<b>03 Apr 2024</b>	13 Apr 2023	20 Apr 2022
Machine Age	mths	Client Info		<b>0</b>	0	0
Oil Age	mths	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>SEVERE</b>	ABNORMAL	SEVERE

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>105</b>	128	86
Chromium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>200	<b>4</b>	3	5
Tin	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	40	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m		<b>2</b>	1	8
Phosphorus	ppm	ASTM D5185m	270	<b>146</b>	164	205
Zinc	ppm	ASTM D5185m		<b>0</b>	2	3
Sulfur	ppm	ASTM D5185m	8600	<b>11124</b>	11041	9937

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>4</b>	4	7
Sodium	ppm	ASTM D5185m		<b>2</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	2
Water	%	ASTM D6304	>0.2	<b>0.007</b>	0.007	0.005
ppm Water	ppm	ASTM D6304	>2000	<b>74</b>	75.7	53.9

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	<b>▲ 110154</b>	▲ 160973	▲ 72122
Particles >6µm		ASTM D7647	>320	<b>▲ 23447</b>	▲ 63643	▲ 11656
Particles >14µm		ASTM D7647	>80	<b>▲ 643</b>	▲ 3671	▲ 288
Particles >21µm		ASTM D7647	>20	<b>▲ 117</b>	▲ 562	▲ 47
Particles >38µm		ASTM D7647	>4	<b>3</b>	▲ 39	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	▲ 3	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<b>▲ 24/22/17</b>	▲ 25/23/19	▲ 23/21/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	<b>0.49</b>	0.60	0.62


# OIL ANALYSIS REPORT

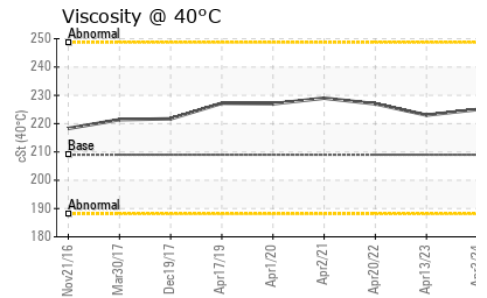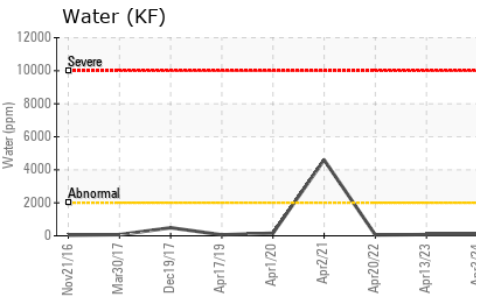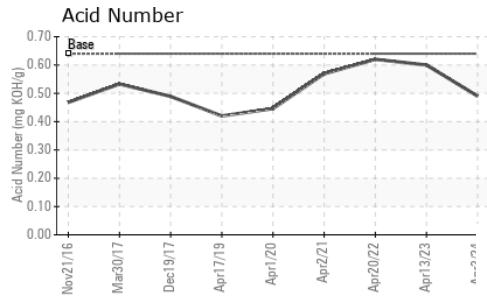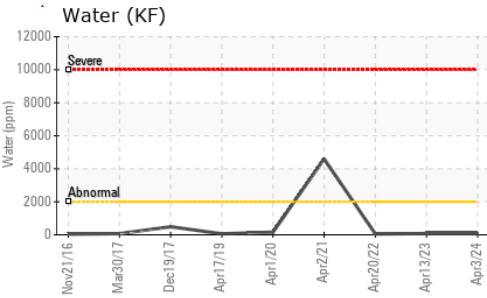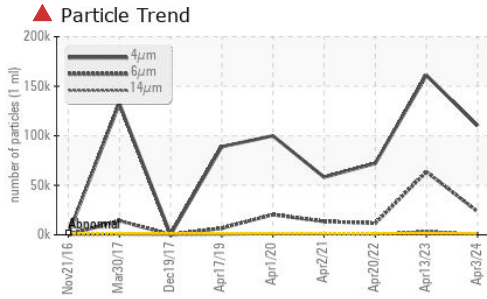






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 209	225	223	227

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

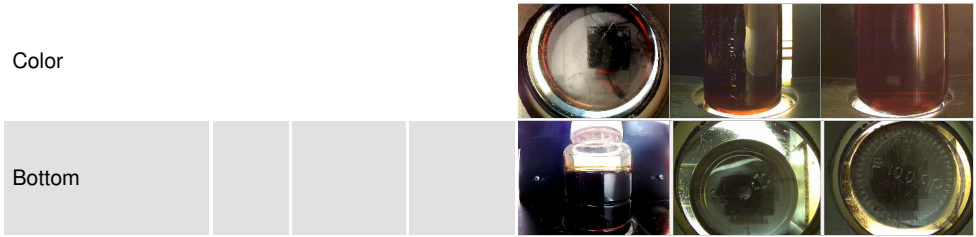

## GRAPHS

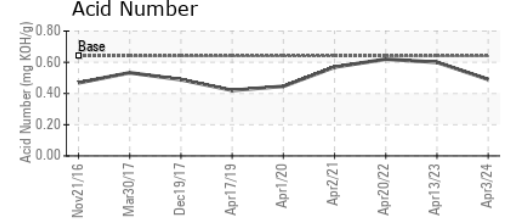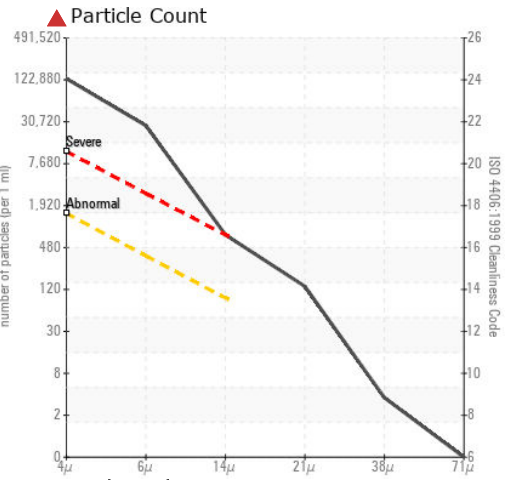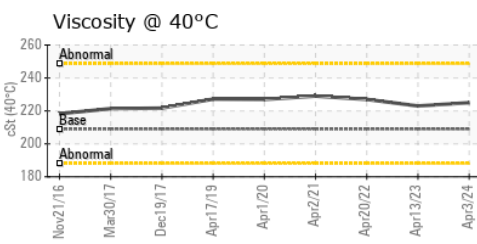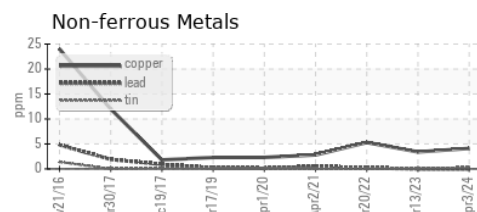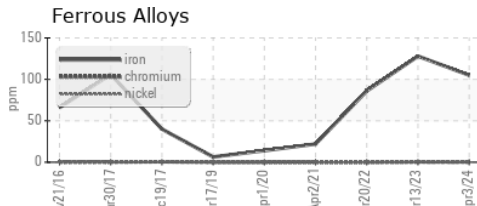

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46892  
**Lab Number** : 06143047  
**Unique Number** : 10967855  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )  
**Received** : 09 Apr 2024  
**Tested** : 10 Apr 2024  
**Diagnosed** : 10 Apr 2024 - Wes Davis

**HYDRAULIC SUPPLY COMPANY**  
 326 SE 1ST ST  
 BELLE GLADE, FL  
 33430  
 Contact: ROBERT RETALEATO  
 r.retaeato@hydraulic-supply.com; rrs@hydraulic-supply.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)