

# **OIL ANALYSIS REPORT**



Machine Id

# **FALK REFINERY VAC PAN 4**

Gearbox

**MOBIL SHC 630 (10 GAL)** 

### **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST46555		
Sample Date		Client Info		03 Apr 2024		
Machine Age	mths	Client Info		03 Apr 2024 0		
Oil Age	mths	Client Info		0		
Oil Changed	111(113	Client Info		N/A		
Sample Status		Oliciti IIIIo		ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m		6		
Chromium	ppm	ASTM D5185m		0		
Nickel		ASTM D5185m	>15	0		
Titanium	ppm	ASTM D5185m	>10	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	0		
	ppm			-		
Copper Tin	ppm	ASTM D5185m ASTM D5185m		0		
	ppm		>25	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		393		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		208		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	8		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.2	0.004		
ppm Water	ppm	ASTM D6304	>2000	43		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>1300	<u>▲</u> 181353		
Particles >6μm		ASTM D7647	>320	<u>A</u> 82051		
Particles >14μm		ASTM D7647	>80	<u>^</u> 5047		
Particles >21µm		ASTM D7647	>20	<u>^</u> 902		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>17/15/13	<u>\$\text{\scale}\$ 25/24/20</u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32		



## **OIL ANALYSIS REPORT**

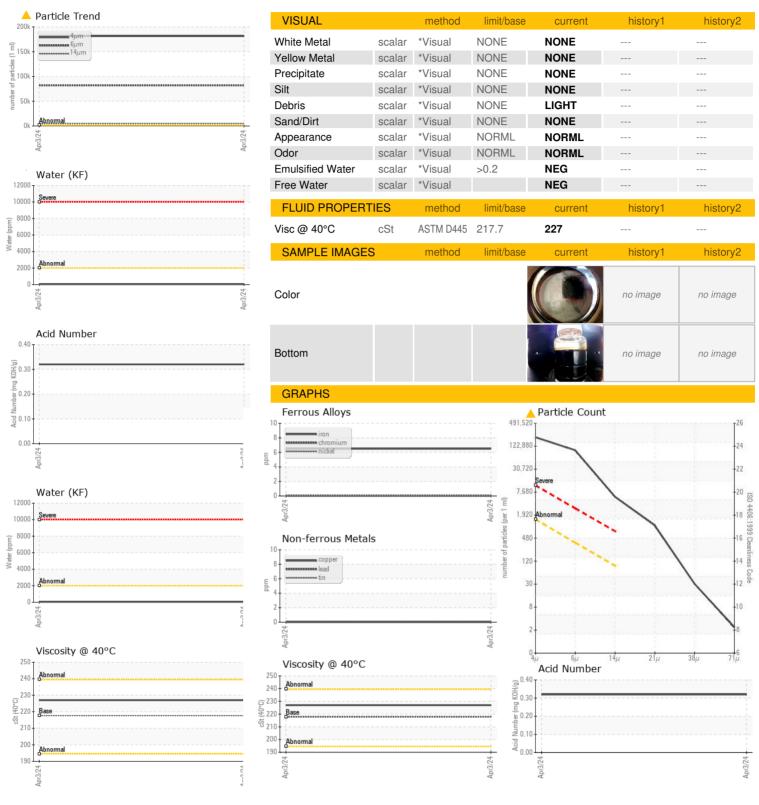





Certificate 12367

Laboratory Sample No.

Lab Number

: ST46555 : 06143058 Unique Number : 10967866

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 09 Apr 2024 **Tested** 

: 10 Apr 2024 Diagnosed Test Package : IND 2 ( Additional Tests: KF, PrtCount )

: 11 Apr 2024 - Jonathan Hester

BELLE GLADE, FL US 33430 Contact: ROBERT RETALEATO r.retaleato@hydraulic-supply.com;rsr@hydraulic-supply.com

**HYDRAULIC SUPPLY COMPANY** 

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: HYDBELFL [WUSCAR] 06143058 (Generated: 04/11/2024 16:44:19) Rev: 1

Contact/Location: ROBERT RETALEATO - HYDBELFL

326 SE 1ST ST

T: (561)996-4431

F: (561)996-8531