





Machine Id  
**TA-7 REDUCER**  
Component  
**Gearbox**  
Fluid  
**CHEVRON MEROPA 220 (20 GAL)**

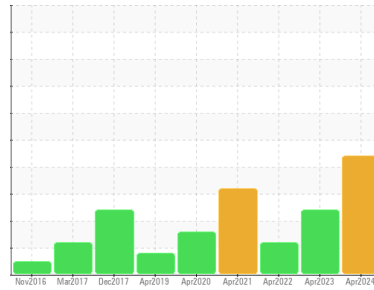

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

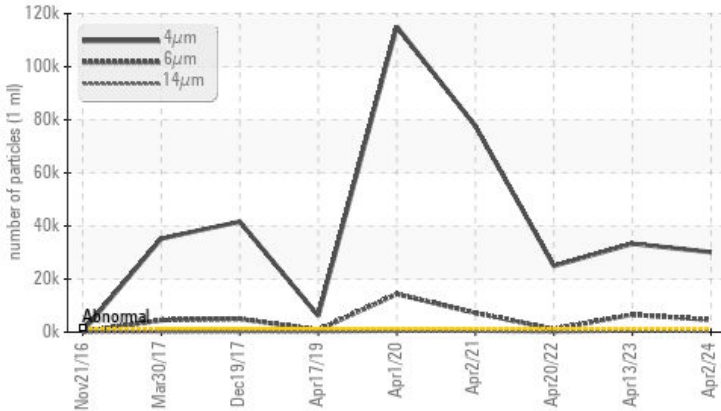

## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | SEVERE     | ABNORMAL   | SEVERE     |
|-----------------|--------------|-----------|------------|------------|------------|
| Particles >4µm  | ASTM D7647   | >1300     | ▲ 30117    | ▲ 33324    | ▲ 24937    |
| Particles >6µm  | ASTM D7647   | >320      | ▲ 4659     | ▲ 6578     | ▲ 1116     |
| Particles >14µm | ASTM D7647   | >80       | ▲ 206      | ▲ 382      | 21         |
| Particles >21µm | ASTM D7647   | >20       | ▲ 47       | ▲ 82       | 4          |
| Oil Cleanliness | ISO 4406 (c) | >17/15/13 | ▲ 22/19/15 | ▲ 22/20/16 | ▲ 22/17/12 |

Customer Id: HYDBELFL  
Sample No.: ST46589  
Lab Number: 06143070  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action            | Status | Date | Done By | Description  |
|-------------------|--------|------|---------|--|
| Change Filter     | ---    | ---  | ?       | We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.   |
| Resample          | ---    | ---  | ?       | Resample in 30-45 days to monitor this situation.  |
| Check Breathers   | ---    | ---  | ?       | The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. |
| Check Dirt Access | ---    | ---  | ?       | We advise that you check all areas where contaminants can enter the system.  |
| Filter Fluid      | ---    | ---  | ?       | We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.   |

## HISTORICAL DIAGNOSIS



### 13 Apr 2023 Diag: Jonathan Hester

We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. Please note that this is a corrected copy for diagnostic comment updates. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



### 20 Apr 2022 Diag: Wes Davis

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Particles >4µm are severely high. Particles >6µm are abnormally high. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



### 02 Apr 2021 Diag: Don Baldrige


We advise that you check for the source of water entry. We advise that you follow the water drain-off procedure for this component. We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue. All component wear rates are normal. There is a high amount of particulates present in the oil. There is a moderate concentration of water present in the oil. The AN level is acceptable for this fluid.

[view report](#)





Machine Id  
**TA-7 REDUCER**  
Component  
**Gearbox**  
Fluid  
**CHEVRON MEROPA 220 (20 GAL)**

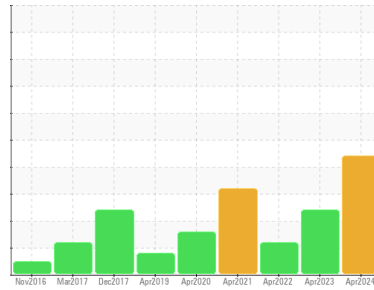

## DIAGNOSIS

### Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>ST46589</b>     | ST44637     | ST44325     |
| Sample Date   | Client Info |             | <b>02 Apr 2024</b> | 13 Apr 2023 | 20 Apr 2022 |
| Machine Age   | mths        | Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | mths        | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>SEVERE</b>      | ABNORMAL    | SEVERE      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >200 | <b>57</b>    | 21       | 25       |
| Chromium | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m >15  | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >25  | <b>0</b>     | 0        | <1       |
| Lead     | ppm    | ASTM D5185m >100 | <b>&lt;1</b> | 0        | 1        |
| Copper   | ppm    | ASTM D5185m >200 | <b>3</b>     | 2        | 3        |
| Tin      | ppm    | ASTM D5185m >25  | <b>0</b>     | 0        | 0        |
| Antimony | ppm    | ASTM D5185m >5   | <b>---</b>   | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 40   | <b>0</b>     | 0        | <1       |
| Barium     | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m      | <b>0</b>     | 0        | <1       |
| Manganese  | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m      | <b>1</b>     | 1        | 1        |
| Calcium    | ppm    | ASTM D5185m      | <b>9</b>     | 1        | 4        |
| Phosphorus | ppm    | ASTM D5185m 270  | <b>147</b>   | 136      | 134      |
| Zinc       | ppm    | ASTM D5185m      | <b>14</b>    | 7        | 3        |
| Sulfur     | ppm    | ASTM D5185m 8600 | <b>11216</b> | 10928    | 5581     |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >50  | <b>2</b>     | 3        | 4        |
| Sodium    | ppm    | ASTM D5185m      | <b>&lt;1</b> | 1        | 0        |
| Potassium | ppm    | ASTM D5185m >20  | <b>3</b>     | 0        | 1        |
| Water     | %      | ASTM D6304 >0.2  | <b>0.005</b> | 0.013    | 0.001    |
| ppm Water | ppm    | ASTM D6304 >2000 | <b>59</b>    | 136.5    | 0.3      |






## FLUID CLEANLINESS

|                 | method       | limit/base | current           | history1   | history2   |
|-----------------|--------------|------------|-------------------|------------|------------|
| Particles >4µm  | ASTM D7647   | >1300      | <b>▲ 30117</b>    | ▲ 33324    | ▲ 24937    |
| Particles >6µm  | ASTM D7647   | >320       | <b>▲ 4659</b>     | ▲ 6578     | ▲ 1116     |
| Particles >14µm | ASTM D7647   | >80        | <b>▲ 206</b>      | ▲ 382      | 21         |
| Particles >21µm | ASTM D7647   | >20        | <b>▲ 47</b>       | ▲ 82       | 4          |
| Particles >38µm | ASTM D7647   | >4         | <b>3</b>          | ▲ 10       | 0          |
| Particles >71µm | ASTM D7647   | >3         | <b>1</b>          | 0          | 0          |
| Oil Cleanliness | ISO 4406 (c) | >17/15/13  | <b>▲ 22/19/15</b> | ▲ 22/20/16 | ▲ 22/17/12 |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.64 | <b>0.30</b> | 0.25     | 0.34     |


# OIL ANALYSIS REPORT

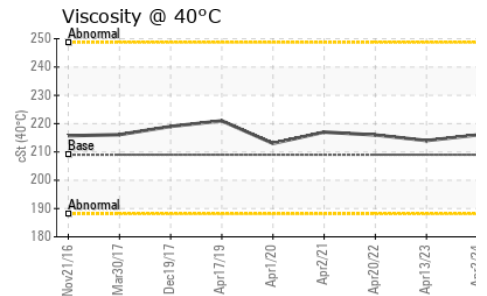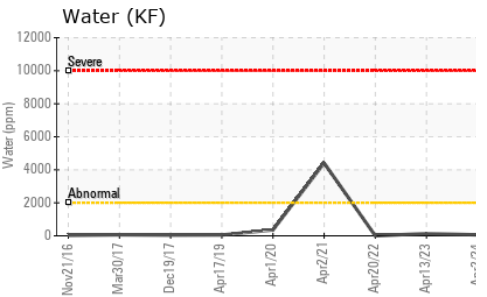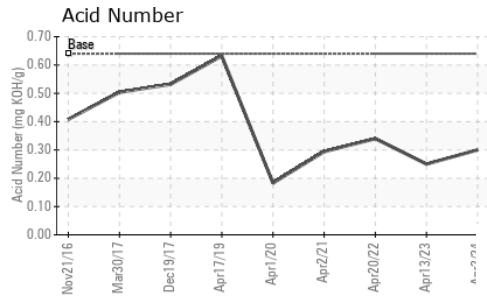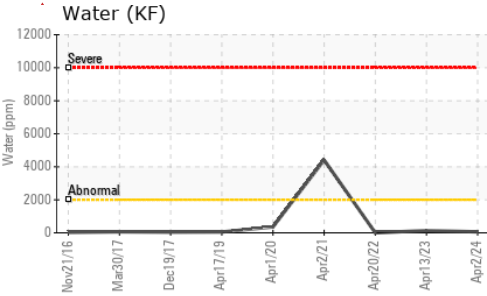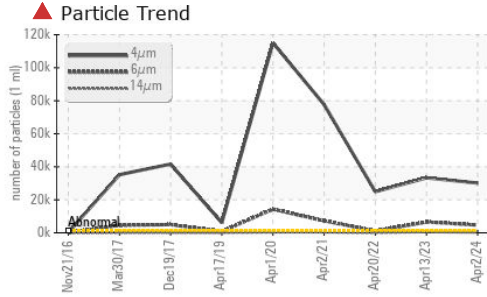






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | LIGHT    | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base    | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 209 | 216     | 214      | 216      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

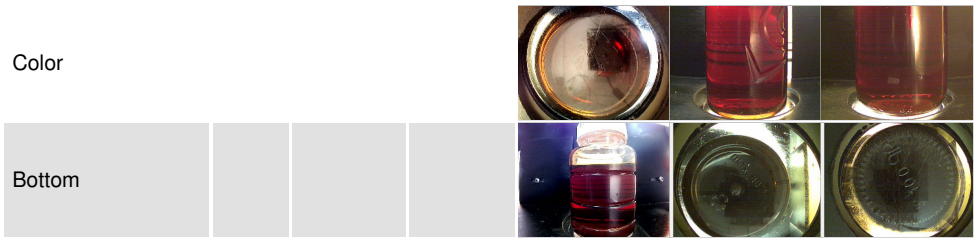

## GRAPHS

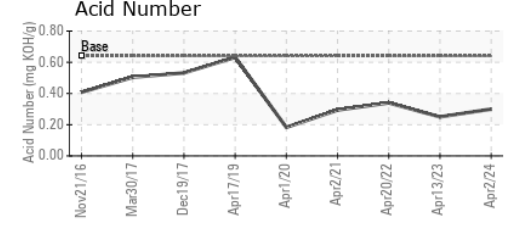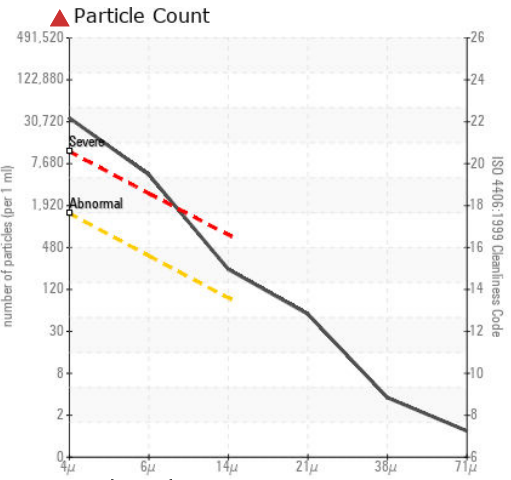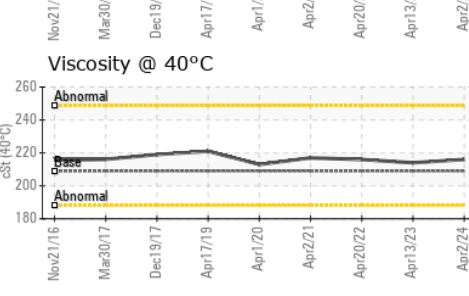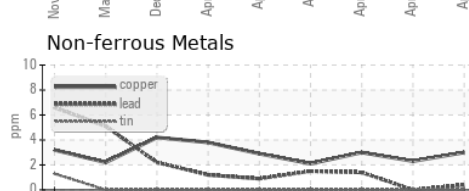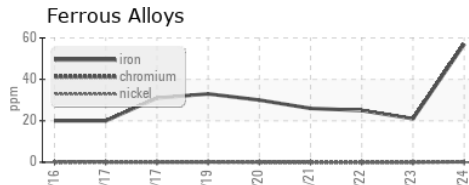

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46589  
**Lab Number** : 06143070  
**Unique Number** : 10967878  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**Received** : 09 Apr 2024  
**Tested** : 10 Apr 2024  
**Diagnosed** : 10 Apr 2024 - Wes Davis

**HYDRAULIC SUPPLY COMPANY**  
 326 SE 1ST ST  
 BELLE GLADE, FL  
 33430

Contact: ROBERT RETALEATO  
 r.retaleato@hydraulic-supply.com; rrsr@hydraulic-supply.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (561)996-4431

F: (561)996-8531