


# **OIL ANALYSIS REPORT**

Sample Rating Trend

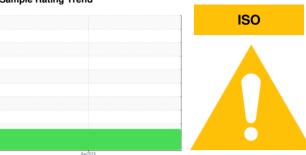

Machine Id

# **KAESER 8780399**

Component Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

### **DIAGNOSIS**

### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016103		
Sample Date		Client Info		02 Apr 2024		
Machine Age	hrs	Client Info		2619		
Oil Age	hrs	Client Info		1043		
Oil Changed	1113	Client Info		Not Changd		
Sample Status		Oliciti IIIIo		ABNORMAL		
				ADITOTIMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	3		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	17		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	62		
Calcium	ppm	ASTM D5185m	2	1		
Phosphorus	ppm	ASTM D5185m		6		
Zinc	ppm	ASTM D5185m		3		
Sulfur	ppm	ASTM D5185m		20742		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	0.026		
ppm Water	ppm	ASTM D6304	>500	261		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		18837		
Particles >6µm		ASTM D7647	>1300	<b>6683</b>		
Particles >14µm		ASTM D7647	>80	<b>▲</b> 537		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	5		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/20/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A : IN (AN)		AOTH DOOLS	0.4	0.27	- Instory I	History


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.37



## **OIL ANALYSIS REPORT**

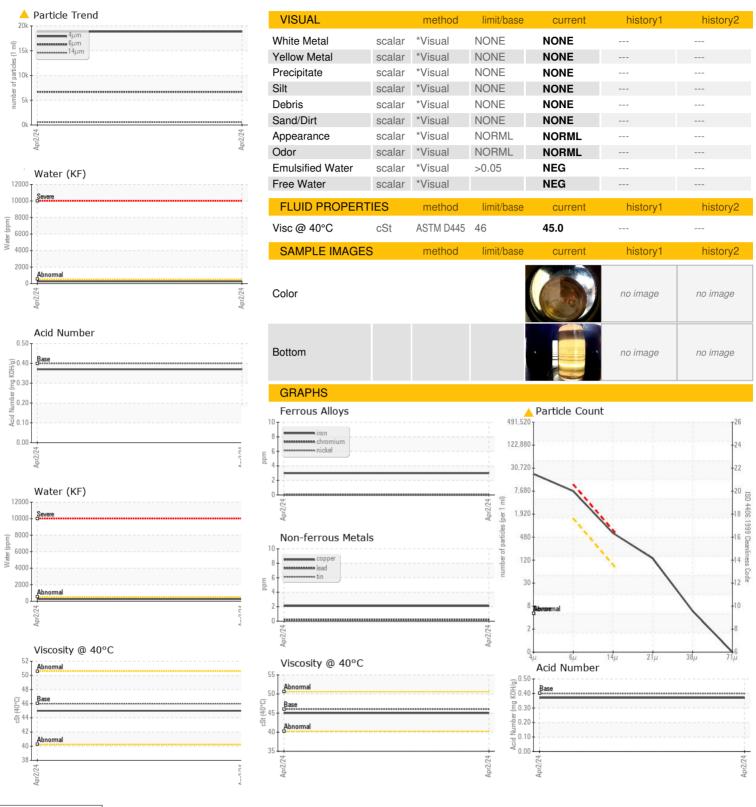





Certificate 12367

Laboratory Sample No.

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 06143083

: KCPA016103 Unique Number : 10967891

Diagnosed Test Package : IND 2 ( Additional Tests: KF, PrtCount )

Received

**Tested** 

: 09 Apr 2024

: 10 Apr 2024

: 11 Apr 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

**CRETE CARRIERS** 2400 NOR-FLEET RD WEST MEMPHIS, AR

US 72301 Contact: Service Manager

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: CREWESAR [WUSCAR] 06143083 (Generated: 04/11/2024 16:18:24) Rev: 1

Contact/Location: Service Manager - CREWESAR

T:

F: