




OIL ANALYSIS REPORT

Sample Rating Trend

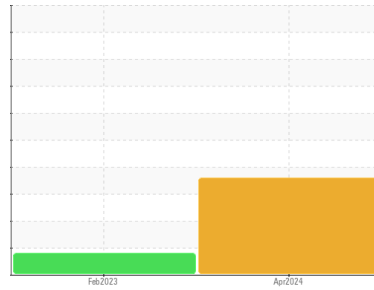

WATER



Machine Id
7279910 (S/N 1519)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil. There is a light concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KC101663	KC101949	---
Sample Date	Client Info			01 Apr 2024	02 Feb 2023	---
Machine Age	hrs	Client Info		7562	5789	---
Oil Age	hrs	Client Info		60	700	---
Oil Changed	Client Info			Not Chngd	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>3	0	0	---
Titanium	ppm	ASTM D5185m	>3	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	0	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>50	3	3	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	---
Barium	ppm	ASTM D5185m	90	65	17	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	100	73	44	---
Calcium	ppm	ASTM D5185m	0	1	<1	---
Phosphorus	ppm	ASTM D5185m	0	0	8	---
Zinc	ppm	ASTM D5185m	0	<1	9	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	3	---
Sodium	ppm	ASTM D5185m		4	6	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water	%	ASTM D6304	>0.05	▲ 0.058	0.021	---
ppm Water	ppm	ASTM D6304	>500	▲ 587	211.9	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		108026	9337	---
Particles >6µm		ASTM D7647	>1300	▲ 32331	▲ 3341	---
Particles >14µm		ASTM D7647	>80	▲ 1327	48	---
Particles >21µm		ASTM D7647	>20	▲ 402	2	---
Particles >38µm		ASTM D7647	>4	▲ 27	1	---
Particles >71µm		ASTM D7647	>3	2	1	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 24/22/18	▲ 20/19/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.41	0.38	---


OIL ANALYSIS REPORT

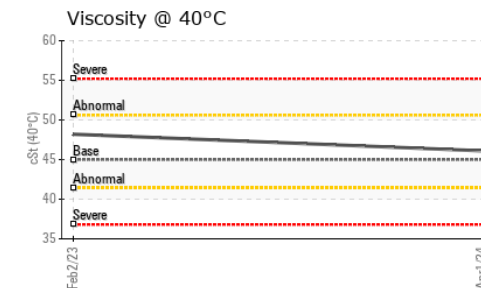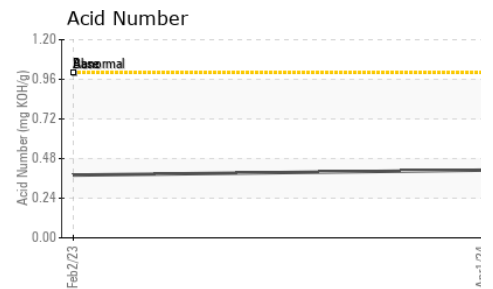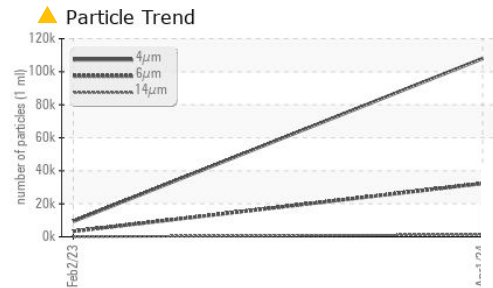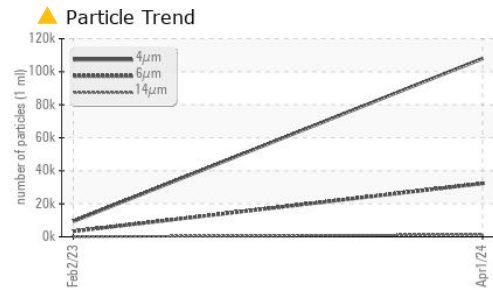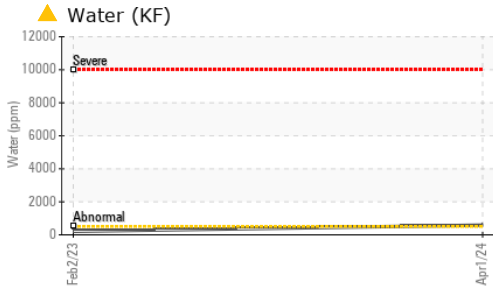





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	46.1	48.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

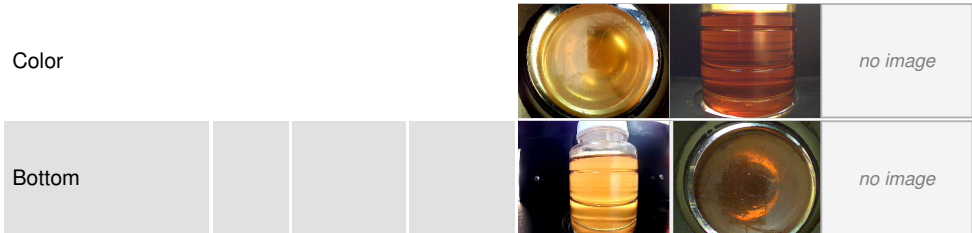

GRAPHS

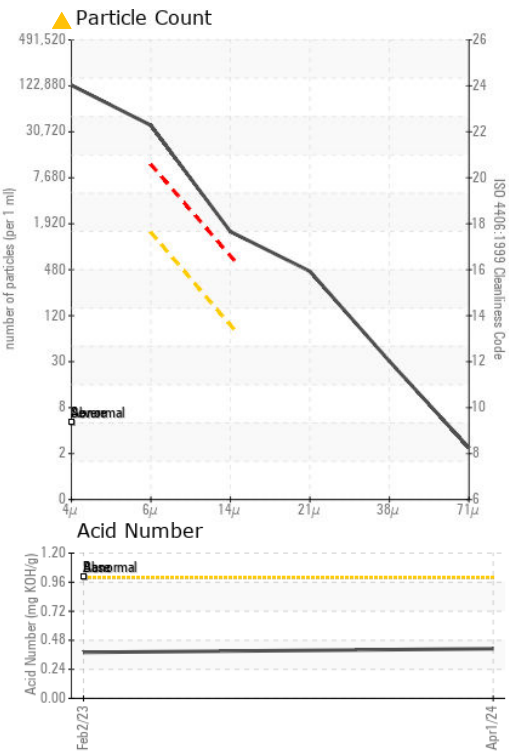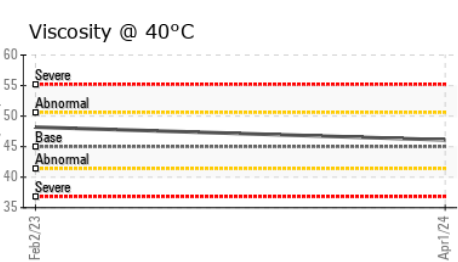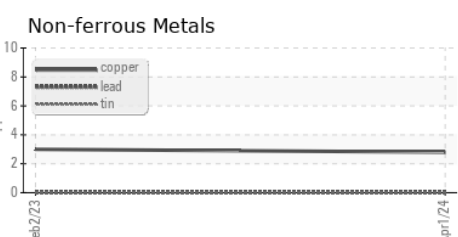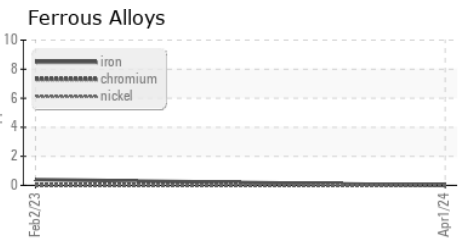

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC101663
Lab Number : 06143090
Unique Number : 10967898
Test Package : IND 2
Received : 09 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Jonathan Hester

SMITH PROVISION
 1890 W 20TH ST
 ERIE, PA
 US 16502
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)