


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7336110

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015940	KCP37985	KCP29209
Sample Date		Client Info		02 Apr 2024	27 Aug 2021	26 Oct 2020
Machine Age	hrs	Client Info		2165	0	289
Oil Age	hrs	Client Info		2165	0	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	8	14	2
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	9
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	0	0	67
Calcium	ppm	ASTM D5185m	0	0	0	<1
Phosphorus	ppm	ASTM D5185m	0	<1	0	9
Zinc	ppm	ASTM D5185m	0	0	0	6
Sulfur	ppm	ASTM D5185m	23500	20781	15723	17609
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	0	0
Sodium	ppm	ASTM D5185m		2	0	14
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water	%	ASTM D6304	>0.05	0.006	△ 0.120	0.021
ppm Water	ppm	ASTM D6304	>500	65	<u>1200</u>	210.1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4649		20962
Particles >6µm		ASTM D7647	>1300	<u> </u>		<u></u> 3020
Particles >14µm		ASTM D7647	>80	59		<u> </u>
Particles >21µm		ASTM D7647	>20	12		<u></u> 41
Particles >38µm		ASTM D7647	>4	0		3
Particles >71µm		ASTM D7647	>3	0		0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/18/13		△ 19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

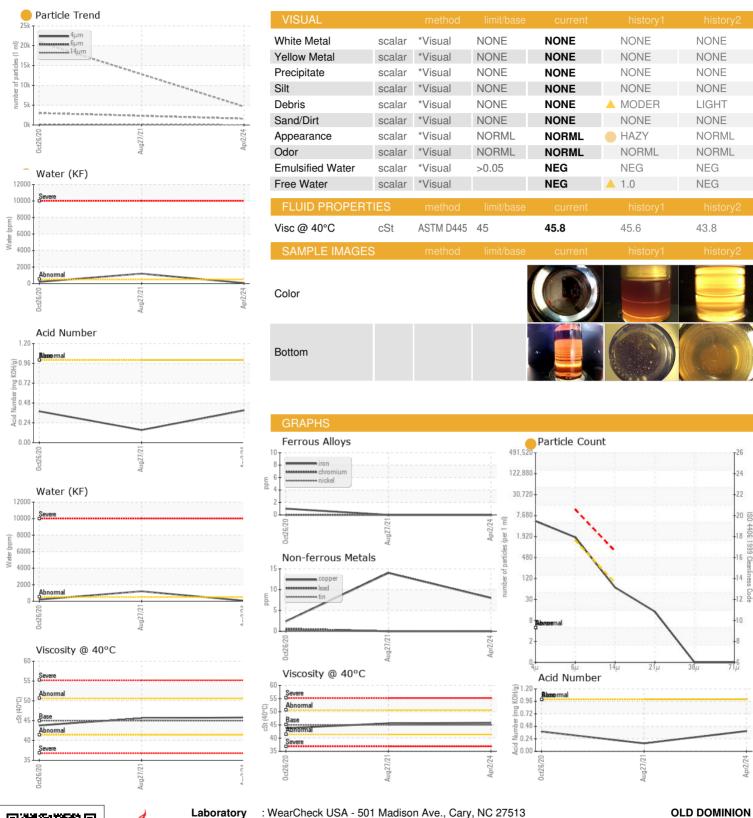



Laboratory Sample No.

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA015940

: 06143100 Unique Number : 10967908

Received **Tested** Diagnosed

: 09 Apr 2024 : 10 Apr 2024

: 11 Apr 2024 - Angela Borella

JONESBORO, AR Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - OLDJONAR

US

T:

F:

3100 NESTLE RD