

### NORMAL

# RECO HIGH STAGE 2 (S/N 16536 / 2749)

Refrigeration Compressor

Fluid PETRO CANADA REFLO XL SYNTHETIC BLEND (55 GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM   | 1ATION | method       | limit/base | current     | history1    | history2    |
|-----------------|--------|--------------|------------|-------------|-------------|-------------|
| Sample Number   |        | Client Info  |            | USP0007880  | USP0004565  | USP0001403  |
| Sample Date     |        | Client Info  |            | 04 Apr 2024 | 22 Dec 2023 | 05 Oct 2023 |
| Machine Age     | hrs    | Client Info  |            | 38378       | 36046       | 34274       |
| Dil Age         | hrs    | Client Info  |            | 38270       | 35941       | 34274       |
| Dil Changed     |        | Client Info  |            | N/A         | N/A         | N/A         |
| Sample Status   |        |              |            | NORMAL      | NORMAL      | NORMAL      |
| WEAR METALS     |        | method       | limit/base | current     | history1    | history2    |
| ron             | ppm    | ASTM D5185m  | >8         | 37          | 34          | 24          |
| Chromium        | ppm    | ASTM D5185m  | >2         | 0           | <1          | 0           |
| Nickel          | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Titanium        | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Silver          | ppm    | ASTM D5185m  | >2         | 0           | 0           | 0           |
| Aluminum        | ppm    | ASTM D5185m  | >3         | 0           | 0           | 0           |
| Lead            | ppm    | ASTM D5185m  | >2         | 0           | 0           | 0           |
| Copper          | ppm    | ASTM D5185m  | >8         | 0           | 0           | 0           |
| Tin             | ppm    | ASTM D5185m  | >4         | 0           | 0           | <1          |
| Vanadium        | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Cadmium         | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| ADDITIVES       |        | method       | limit/base | current     | history1    | history2    |
| Boron           | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Barium          | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Molybdenum      | ppm    | ASTM D5185m  |            | 0           | 0           | 0           |
| Manganese       | ppm    | ASTM D5185m  |            | <1          | 0           | <1          |
| Magnesium       | ppm    | ASTM D5185m  |            | 0           | 0           | <1          |
| Calcium         | ppm    | ASTM D5185m  |            | 0           | 6           | 5           |
| Phosphorus      | ppm    | ASTM D5185m  |            | 0           | 0           | 1           |
| Zinc            | ppm    | ASTM D5185m  |            | 0           | 0           | 1           |
| Sulfur          | ppm    | ASTM D5185m  |            | 963         | 1397        | 1159        |
| CONTAMINANTS    |        | method       | limit/base | current     | history1    | history2    |
| Silicon         | ppm    | ASTM D5185m  | >15        | <1          | <1          | <1          |
| Sodium          | ppm    | ASTM D5185m  |            | 1           | 0           | <1          |
| Potassium       | ppm    | ASTM D5185m  | >20        | 0           | <1          | 0           |
| Water           | %      | ASTM D6304   | >0.01      | 0.001       | 0.003       | 0.003       |
| ppm Water       | ppm    | ASTM D6304   | >100       | 12          | 31          | 25.7        |
| FLUID CLEANLIN  | ESS    | method       | limit/base | current     | history1    | history2    |
| Particles >4µm  |        | ASTM D7647   | >20000     | 4847        | 4838        | 3994        |
| Particles >6µm  |        | ASTM D7647   | >2500      | 1331        | 1103        | 1280        |
| Particles >14µm |        | ASTM D7647   | >320       | 65          | 77          | 49          |
| Particles >21µm |        | ASTM D7647   |            | 19          | 19          | 5           |
| Particles >38µm |        | ASTM D7647   | >20        | 1           | 0           | 0           |
| Particles >71µm |        | ASTM D7647   | >4         | 0           | 0           | 0           |
| Oil Cleanliness |        | ISO 4406 (c) | >21/18/15  | 19/18/13    | 19/17/13    | 19/17/13    |
| FLUID DEGRADA   | TION   | method       | limit/base | current     | history1    | history2    |
| I LOID DEGRADA  |        |              |            | Garront     |             |             |





## **OIL ANALYSIS REPORT**

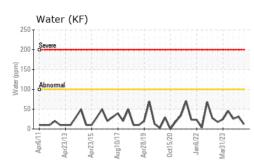

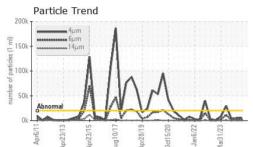






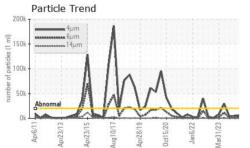

| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.01      | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERT    | IES    | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 59.3       | 59.7    | 59.6     | 59.3     |
| SAMPLE IMAGES    | ;      | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            |         |          |          |

Bottom

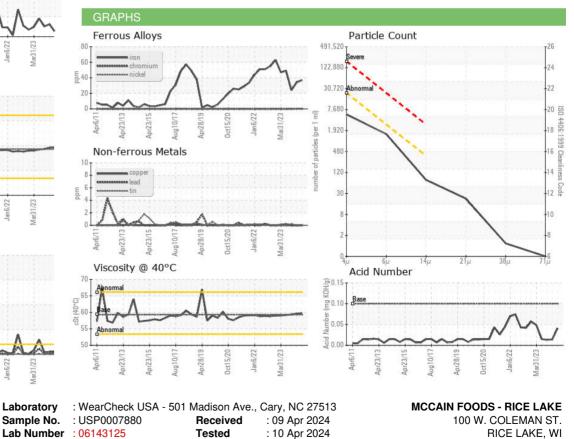

: 10 Apr 2024 - Doug Bogart



Unique Number : 10967933 Certificate L2367 Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (715)236-1542

Diagnosed

Report Id: MCCRIC [WUSCAR] 06143125 (Generated: 04/10/2024 20:28:19) Rev: 1

Contact/Location: JOSH MILLER - MCCRIC Page 2 of 2

US 54868

T:

Contact: JOSH MILLER

josh.miller@mccain.com