




# OIL ANALYSIS REPORT



Area  
**MINING**  
Machine Id  
**ME-15 CATERPILLAR 980G MK700428**  
Component  
**Front Differential**  
Fluid  
**SHELL Spirax S4 CX 30 (--- GAL)**

## Sample Rating Trend

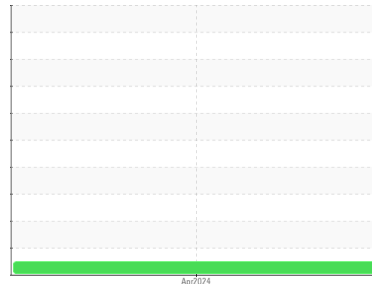

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0927324</b>	---	---
Sample Date	Client Info			<b>04 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>8774</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>50</b>	---	---
Chromium	ppm	ASTM D5185m	>3	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>13	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>103	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>7</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>25</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3195</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1191</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1324</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>9457</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	<b>12</b>	---	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---



# OIL ANALYSIS REPORT



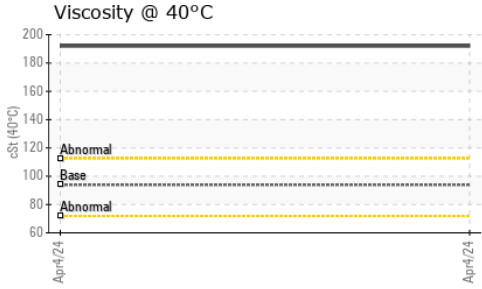


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	93.9	<b>192</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

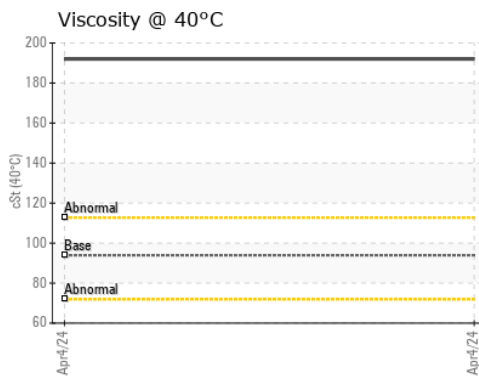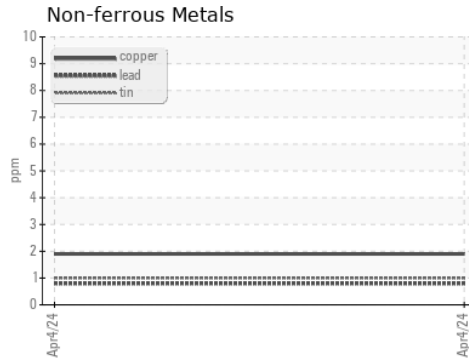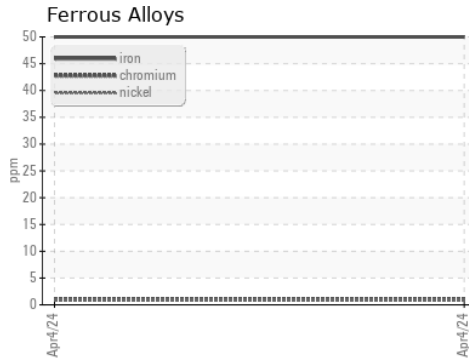

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0927324      **Received** : 09 Apr 2024  
**Lab Number** : **06143451**      **Tested** : 10 Apr 2024  
**Unique Number** : 10968259      **Diagnosed** : 12 Apr 2024 - Jonathan Hester  
**Test Package** : CONST

**COVIA - TUSCALOOSA - 096**  
 2400 CRABTREE ROAD  
 TUSCALOOSA, AL  
 US 35405  
 Contact: Daid Hutson  
 david.hutson@coviacorp.com  
 T: (731)441-3376  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)