




# OIL ANALYSIS REPORT

Sample Rating Trend

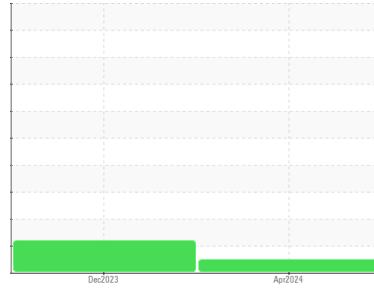

**NORMAL**



Machine Id  
**BLUE BIRD 249**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>RW0004981</b>	RW0004494	---
Sample Date	Client Info			<b>02 Apr 2024</b>	06 Dec 2023	---
Machine Age	mls	Client Info		<b>24000</b>	12000	---
Oil Age	mls	Client Info		<b>12000</b>	12000	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	▲ 3.7	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>44</b>	81	---
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	3	---
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>28</b>	56	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m	>330	<b>13</b>	83	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>8</b>	30	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>61</b>	44	---
Manganese	ppm	ASTM D5185m		<b>2</b>	6	---
Magnesium	ppm	ASTM D5185m	450	<b>943</b>	807	---
Calcium	ppm	ASTM D5185m	3000	<b>1187</b>	1194	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1023</b>	701	---
Zinc	ppm	ASTM D5185m	1350	<b>1255</b>	862	---
Sulfur	ppm	ASTM D5185m	4250	<b>3279</b>	2191	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>12</b>	36	---
Sodium	ppm	ASTM D5185m	>158	<b>5</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>64</b>	164	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	11.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	21.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	20.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.28</b>	10.06	---











# OIL ANALYSIS REPORT

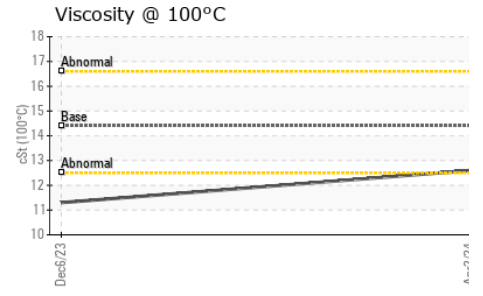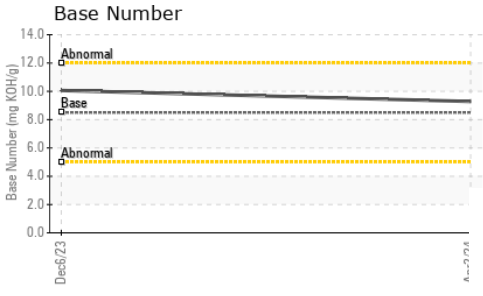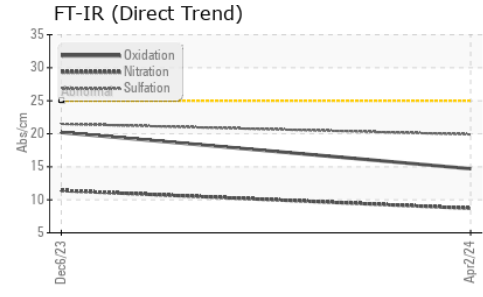

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	▲ 11.3	---

### GRAPHS

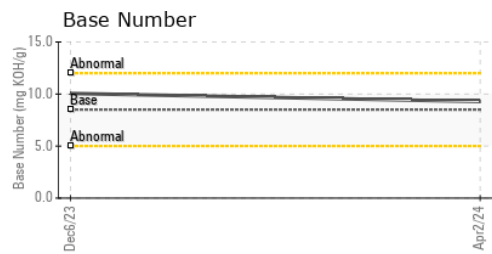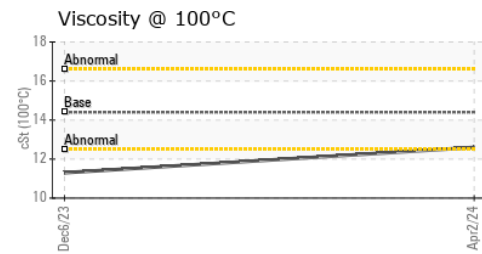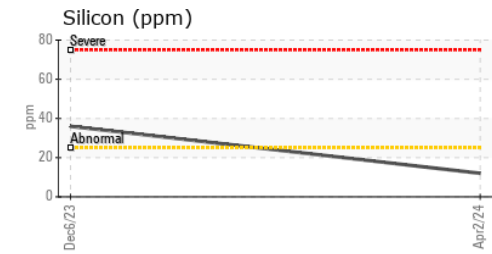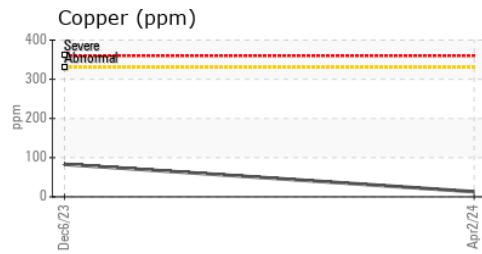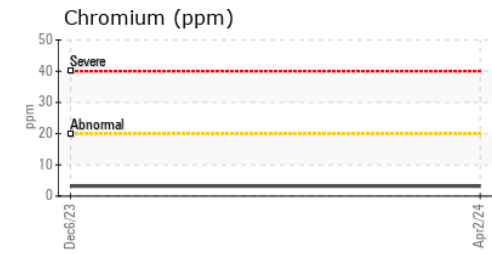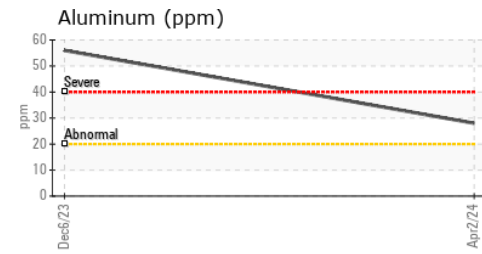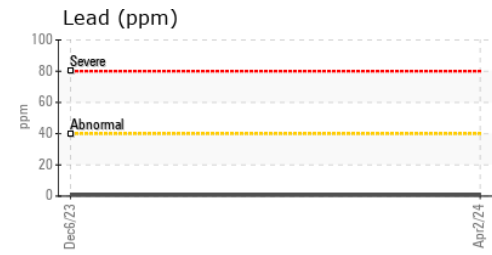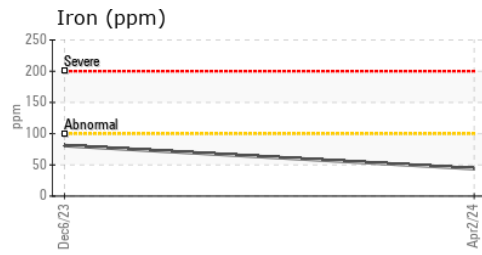

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004981      **Received** : 09 Apr 2024  
**Lab Number** : **06143601**      **Tested** : 10 Apr 2024  
**Unique Number** : 10968409      **Diagnosed** : 10 Apr 2024 - Wes Davis  
**Test Package** : MOB 2

**WEST BRANCH/ROSE CITY SCHOOLS**  
 224 THOMAS  
 WEST BRANCH, MI  
 US 48661  
 Contact: BUTCH HART  
 hartb@wbrc.k12.mi.us  
 T: (989)343-2240  
 F: (989)343-2249

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)