




OIL ANALYSIS REPORT

Area
SCHTRUCK
 Machine Id
6342 [SCHTRUCK]
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

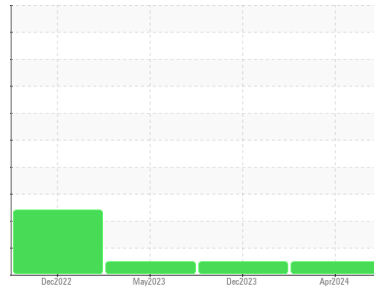

NORMAL

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			SBP0007009	SBP0005939	SBP0004389
Sample Date	Client Info			05 Apr 2024	18 Dec 2023	25 May 2023
Machine Age	mls Client Info			491774	454125	417214
Oil Age	mls Client Info			37649	36911	36506
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	49	55	30
Chromium	ppm	ASTM D5185m	>20	2	1	<1
Nickel	ppm	ASTM D5185m	>2	3	2	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	11	6	3
Lead	ppm	ASTM D5185m	>40	2	3	1
Copper	ppm	ASTM D5185m	>330	6	7	3
Tin	ppm	ASTM D5185m	>15	2	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	2	4	5
Barium	ppm	ASTM D5185m	0	<1	9	0
Molybdenum	ppm	ASTM D5185m	60	90	64	58
Manganese	ppm	ASTM D5185m	0	2	1	<1
Magnesium	ppm	ASTM D5185m	1010	1355	927	805
Calcium	ppm	ASTM D5185m	1070	1577	1194	1236
Phosphorus	ppm	ASTM D5185m	1150	1314	1013	933
Zinc	ppm	ASTM D5185m	1270	1722	1235	1158
Sulfur	ppm	ASTM D5185m	2060	3658	2593	2656

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	7	4
Sodium	ppm	ASTM D5185m		13	10	17
Potassium	ppm	ASTM D5185m	>20	16	18	15


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.2	11.6	13.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	25.5	26.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	24.1	27.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	5.4	3.8	4.7




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

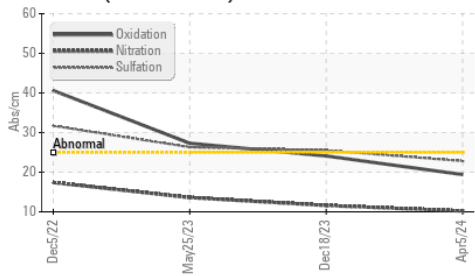

Base Number

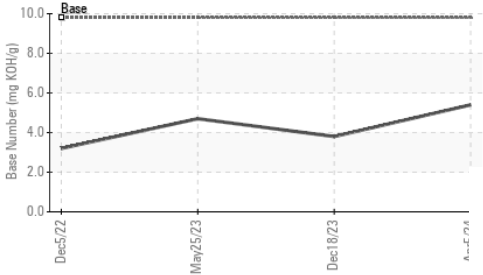

Viscosity @ 100°C

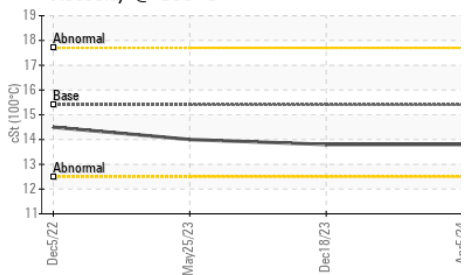


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	14.0

GRAPHS


Ferrous Alloys

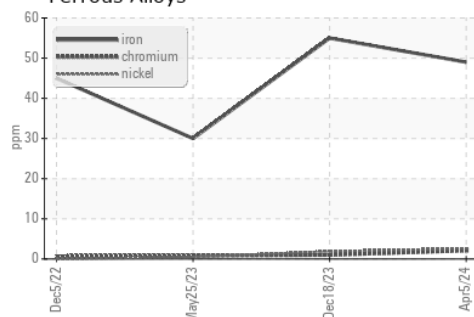


Non-ferrous Metals

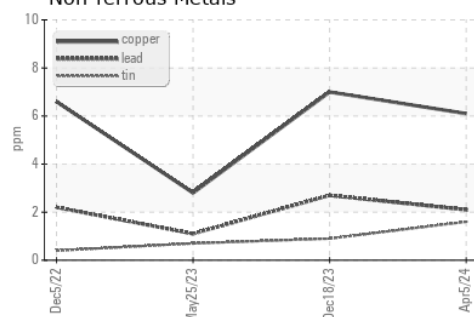

Viscosity @ 100°C

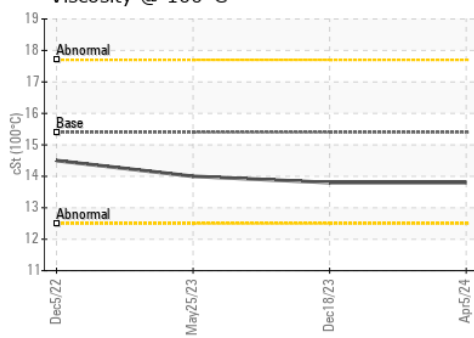

Base Number

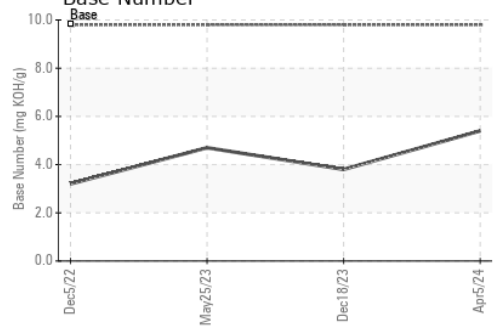

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007009 **Received** : 09 Apr 2024
Lab Number : 06143621 **Tested** : 10 Apr 2024
Unique Number : 10968429 **Diagnosed** : 12 Apr 2024 - Don Baldrige
Test Package : FLEET

SCHMIDT TRANSPORTATION - 605449
 108 E Bay Road
 Plattsmouth, NE
 US 68048
 Contact: NICK DOTY
 doty@liquidtrucking.com
 T: (402)949-9398
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)