




OIL ANALYSIS REPORT

Sample Rating Trend

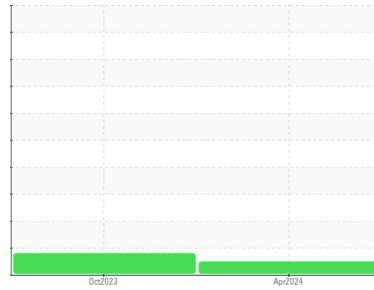

NORMAL



Machine Id
KENWORTH T800 1526 (S/N 096151)
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0878859	WC0822266	---
Sample Date	Client Info			03 Apr 2024	25 Oct 2023	---
Machine Age	mls	Client Info		428015	426686	---
Oil Age	mls	Client Info		0	12000	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	29	▲ 125	---
Chromium	ppm	ASTM D5185m	>20	2	3	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	4	---
Lead	ppm	ASTM D5185m	>40	4	25	---
Copper	ppm	ASTM D5185m	>330	3	11	---
Tin	ppm	ASTM D5185m	>15	1	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	316	62	22	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	1.2	58	64	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m	24	311	661	---
Calcium	ppm	ASTM D5185m	2292	2045	1404	---
Phosphorus	ppm	ASTM D5185m	1064	1026	985	---
Zinc	ppm	ASTM D5185m	1160	1239	1232	---
Sulfur	ppm	ASTM D5185m	4996	3802	2773	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	16	---
Sodium	ppm	ASTM D5185m		4	3	---
Potassium	ppm	ASTM D5185m	>20	23	12	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	1.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.3	11.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.7	25.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	21.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.1	5.2	---











OIL ANALYSIS REPORT

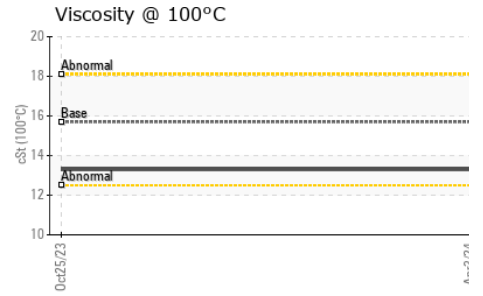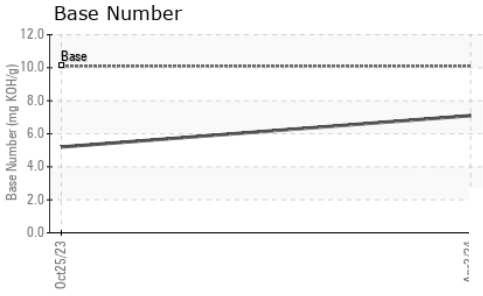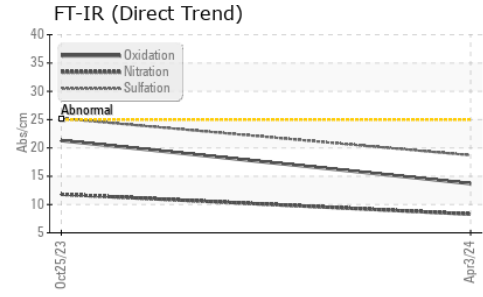

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	13.3	13.3	---

GRAPHS

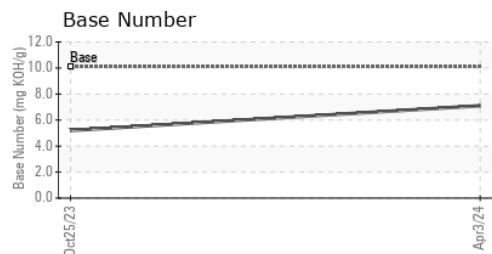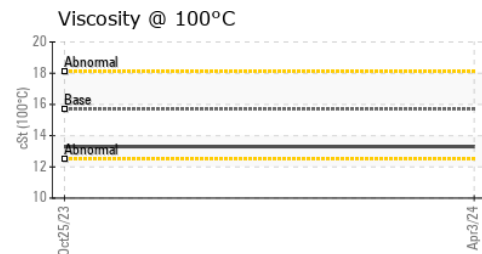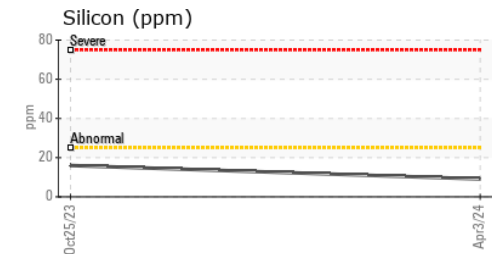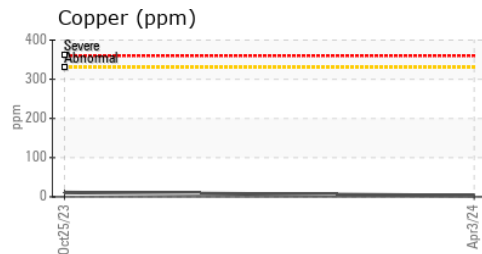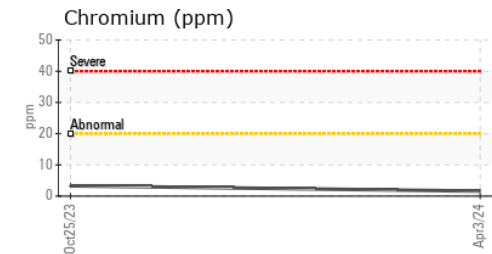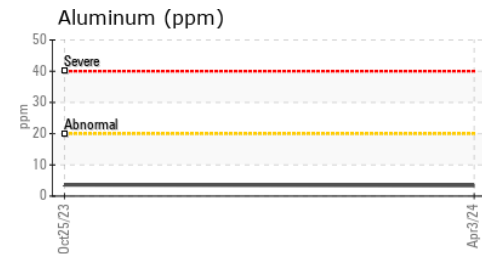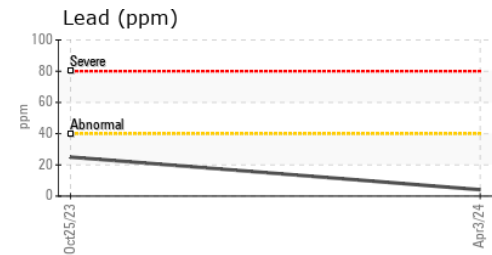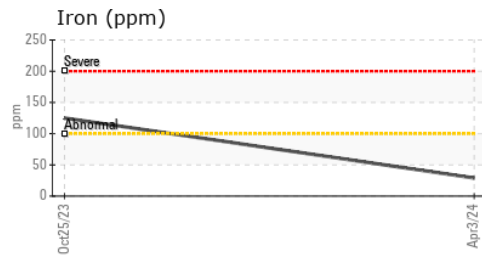

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0878859 **Received** : 09 Apr 2024
Lab Number : **06143673** **Tested** : 10 Apr 2024
Unique Number : 10968481 **Diagnosed** : 10 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

JOHNSON BREEDERS
 3425 HWY 117N
 ROSE HILL, NC
 US 28458

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: GREG JONES
 gregory.jones@houseofraeford.com
 T: (910)289-6884
 F: