




OIL ANALYSIS REPORT

Sample Rating Trend

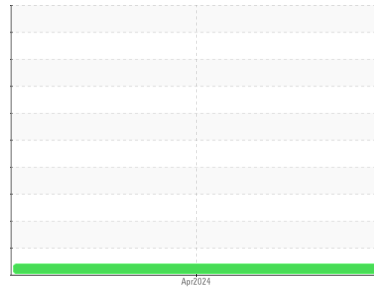

VISCOSITY



Machine Id
142301 - CAT ASPHALT PAVER

Component
Left Auger Pump Drive

Fluid
MOBIL MOBILUBE HD 85W140 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			SBP0006391	---	---
Sample Date	Client Info			03 Apr 2024	---	---
Machine Age	hrs	Client Info		549	---	---
Oil Age	hrs	Client Info		549	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ATTENTION	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	55	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		4	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		3	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		<1	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
Cadmium	ppm	ASTM D5185m		0	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		106	---	---
Barium	ppm	ASTM D5185m		9	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Calcium	ppm	ASTM D5185m		129	---	---
Phosphorus	ppm	ASTM D5185m		857	---	---
Zinc	ppm	ASTM D5185m		28	---	---
Sulfur	ppm	ASTM D5185m		25195	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		5	---	---
Sodium	ppm	ASTM D5185m		51	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---



OIL ANALYSIS REPORT

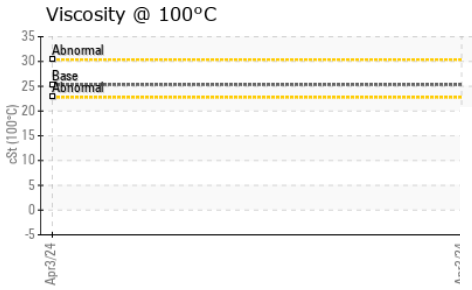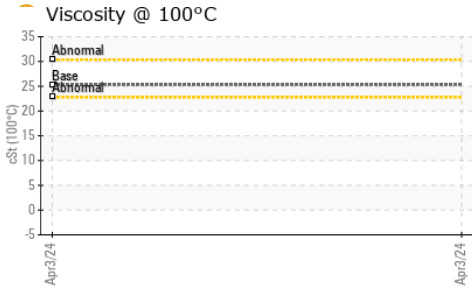




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	328 ● 72.3	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

GRAPHS

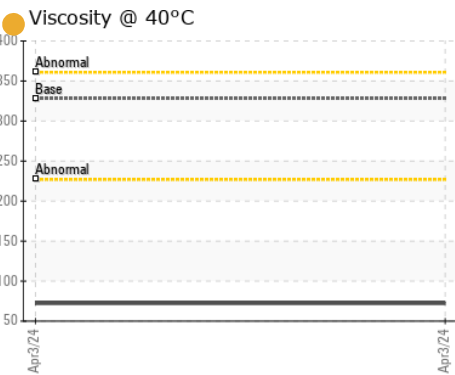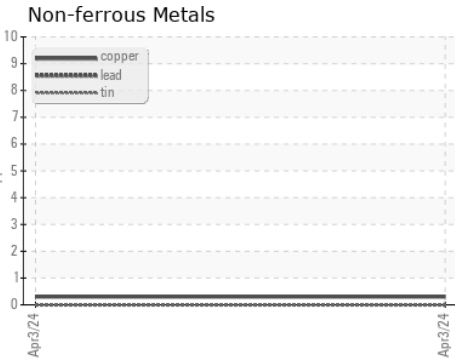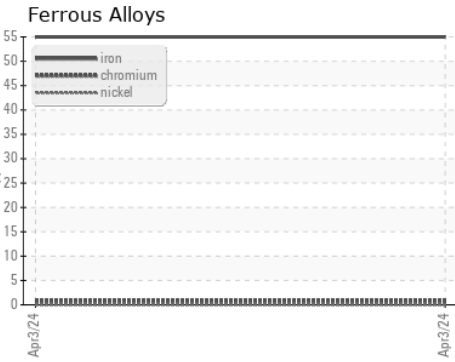

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0006391 **Received** : 09 Apr 2024
Lab Number : 06143749 **Tested** : 12 Apr 2024
Unique Number : 10968557 **Diagnosed** : 12 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: KV100)

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)