




# OIL ANALYSIS REPORT

## Sample Rating Trend

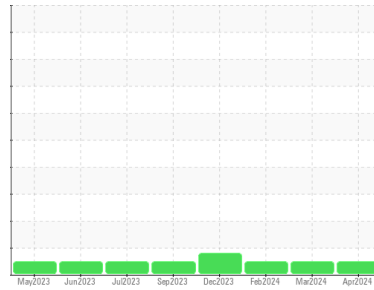

**NORMAL**



Machine Id  
**JOHN DEERE 624L 624L UNIT 6**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PE0003814</b>	PE0003831	PE0003786
Sample Date	Client Info			<b>05 Apr 2024</b>	07 Mar 2024	08 Feb 2024
Machine Age	hrs	Client Info		<b>7165</b>	6934	6725
Oil Age	hrs	Client Info		<b>6934</b>	6725	6299
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG






WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>14</b>	12	19
Iron	ppm	ASTM D5185m	>20	<b>3</b>	6	4
Chromium	ppm	ASTM D5185m	>10	<b>4</b>	5	5
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>75	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>9</b>	1	5
Calcium	ppm	ASTM D5185m		<b>1018</b>	543	542
Phosphorus	ppm	ASTM D5185m		<b>762</b>	685	703
Zinc	ppm	ASTM D5185m		<b>923</b>	723	892
Sulfur	ppm	ASTM D5185m		<b>2520</b>	2045	1994

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m		<b>0</b>	2	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>2027</b>	361	416
Particles >6µm		ASTM D7647	>1300	<b>288</b>	100	129
Particles >14µm		ASTM D7647	>160	<b>17</b>	19	23
Particles >21µm		ASTM D7647	>40	<b>4</b>	4	6
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/15/11</b>	16/14/11	16/14/12

# OIL ANALYSIS REPORT

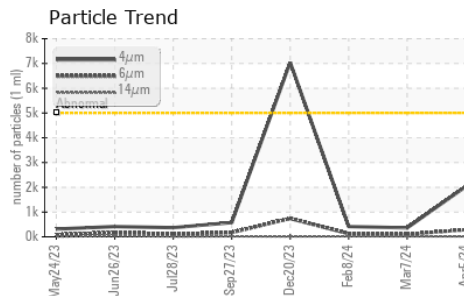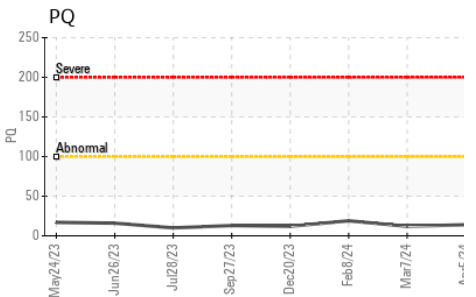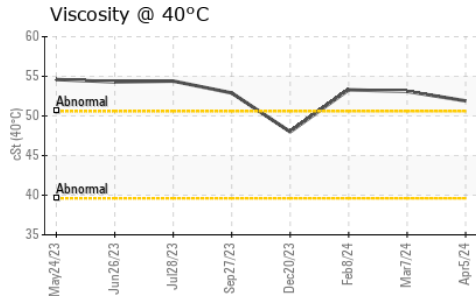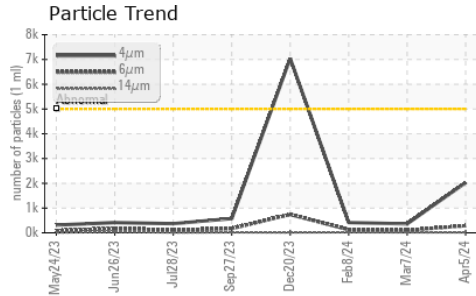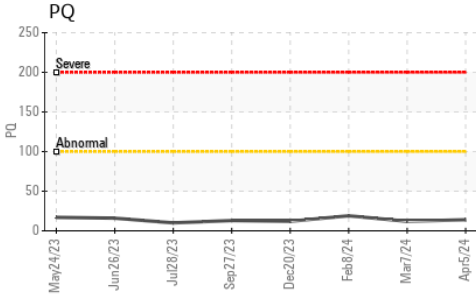


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.86</b>	0.89	0.72






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	0.2%
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		<b>51.9</b>	53.1	53.3

### SAMPLE IMAGES

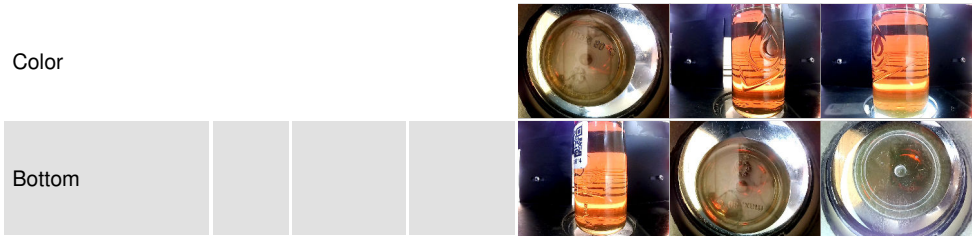

### GRAPHS

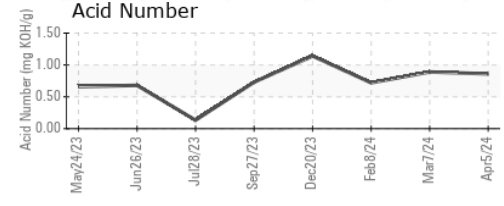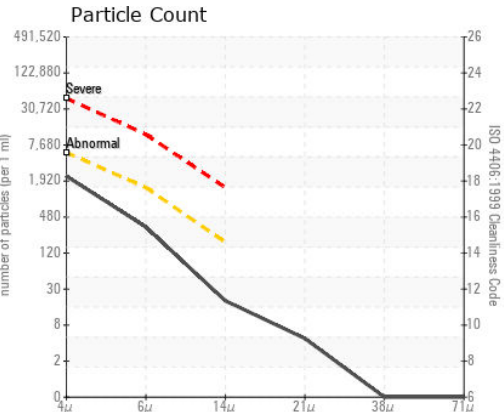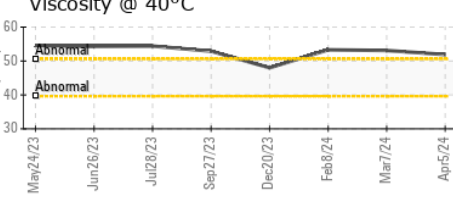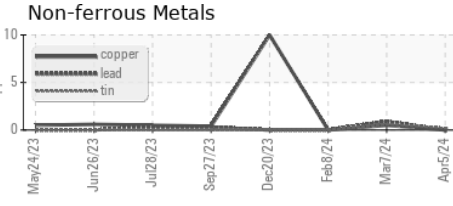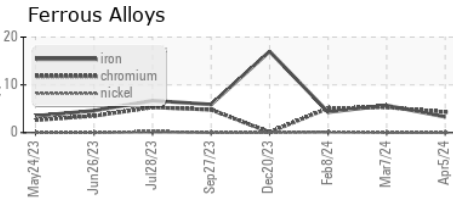

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0003814 **Received** : 10 Apr 2024  
**Lab Number** : **06144113** **Tested** : 11 Apr 2024  
**Unique Number** : 10968921 **Diagnosed** : 12 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN )

**MORNING STAR DAIRY**  
 801 FM 694  
 DALHART, TX  
 US 79022  
 Contact: JOHN DEVRIES  
 johndevries@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)