

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

#### Machine Id

# SIMS PRESS SOUTH TRACKBOUND

Hydraulic System

PROGILINE HF GOLD 46 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM		method	limit/base	current	history1	history2
			11111/0430			nistory2
Sample Number		Client Info		WC0920351		
Sample Date		Client Info		07 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	3		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		20		
Phosphorus	ppm	ASTM D5185m		137		
Zinc	ppm	ASTM D5185m		122		
Sulfur	ppm	ASTM D5185m		1246		
			1	-		
CONTAMINANTS	<b>)</b>	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>—</b> 7473		
Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1913		
Particles >14µm		ASTM D7647	>160	103		
Particles >21µm		ASTM D7647	>40	21		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>20/18/14</b>		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.23		
1:06:05) Bev: 1	5 0		Conte			

Report Id: ALLMONSAF [WUSCAR] 06144207 (Generated: 04/13/2024 10:06:05) Rev: 1

Contact/Location: JEREMY ALMOND - ALLMONSAF



E Gk

<u>응</u> 51

21

2k

0

8 51

te 4k 3

> 21 Ok

0.2

(B/HO) E0.15

P 0.05

0.00

52

50

48

() 0€046 <del>ن</del>ي 44

42

40 Abnorma

38 Apr7/24

# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.05

NONE

NONE

NONE

NONE

NONE

NONE


NORML

NORML

NEG

NEG

45.7

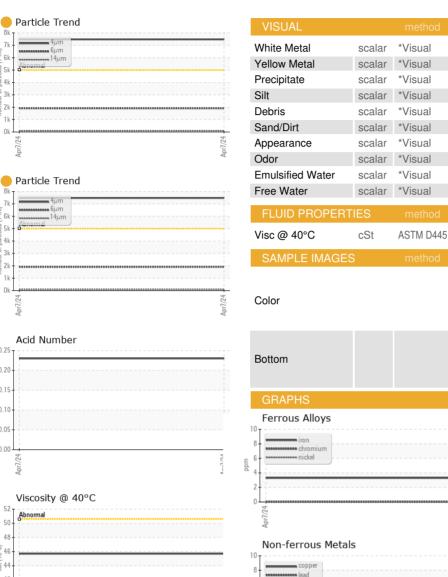

C/L/U

55

50


45 ŝ


35

Apr7//24

Abnorma 40

Viscosity @ 40°C

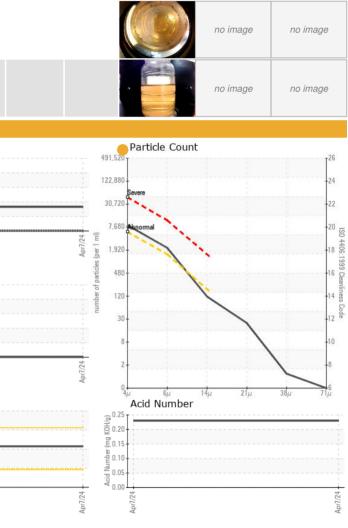

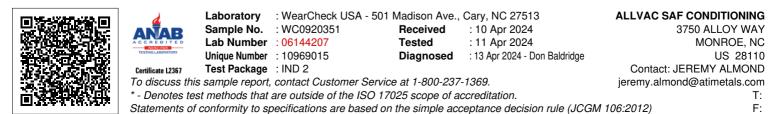

Report Id: ALLMONSAF [WUSCAR] 06144207 (Generated: 04/13/2024 10:06:05) Rev: 1

Contact/Location: JEREMY ALMOND - ALLMONSAF