

OIL ANALYSIS REPORT

NORMAL

Sample Rating Trend

Machine Id

KAESER ASD 40ST 3886670 (S/N 1189)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016057	KCPA003540	KCP55772
Sample Date		Client Info		01 Apr 2024	13 Sep 2023	17 Feb 2023
Machine Age	hrs	Client Info		60449	58457	55011
Oil Age	hrs	Client Info		1992	0	2696
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	5	10	5
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	6
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	35	13	43
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		0	<1	1
Zinc	ppm	ASTM D5185m		17	31	20
Sulfur	ppm	ASTM D5185m		20503	19065	19179
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		15	3	22
Potassium	ppm	ASTM D5185m	>20	0	2	1
Water	%	ASTM D6304	>0.05	0.018	0.009	0.022
ppm Water	ppm	ASTM D6304	>500	184	91.0	222.6
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2912	31764	7842
Particles >6µm		ASTM D7647	>1300	820	<u> </u>	2316
Particles >14µm		ASTM D7647	>80	63	<u> </u>	134
Particles >21µm		ASTM D7647	>20	13	<u> </u>	931
Particles >38µm		ASTM D7647	>4	1	<u> </u>	1
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	<u>22/21/18</u>	20/18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.31	0.32	0.32





OIL ANALYSIS REPORT













VISUAL		ام م الحم میں			la la ta mud	bistow.0
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IFS	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.5	44.5
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						
Bottom						

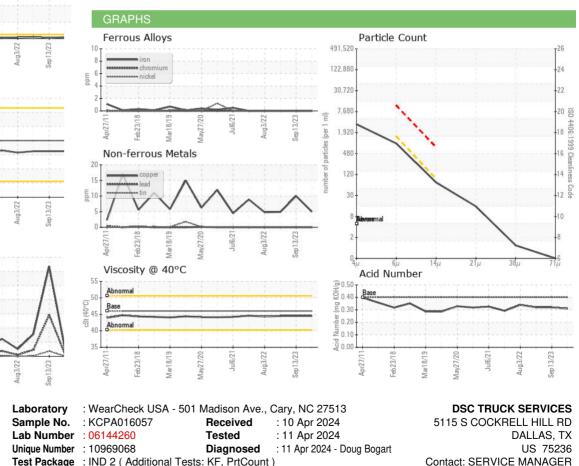



To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: DSCDAL [WUSCAR] 06144260 (Generated: 04/12/2024 06:08:59) Rev: 1

Contact/Location: SERVICE MANAGER ? - DSCDAL

T:

F: