

OIL ANALYSIS REPORT

Machine Id **KAESER AS 30 4700784 (S/N 1152)**

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

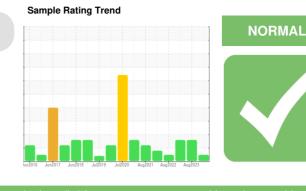



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015352	KCP48019D	KCP49157
Sample Date		Client Info		11 Mar 2024	24 Aug 2023	10 Feb 2023
Machine Age	hrs	Client Info		12455	11812	11077
Oil Age	hrs	Client Info		2358	734	710
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm		>50	0	<1	1
Tin	ppm	ASTM D5185m	>10	۰ <1	<1	0
Vanadium	ppm	ASTM D5185m	>10	0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
	ppin			Ū		-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	90	58	69	57
Calcium	ppm	ASTM D5185m	2	<1	0	<1
Phosphorus	ppm	ASTM D5185m		0	6	0
Zinc	ppm	ASTM D5185m		<1	8	13
Sulfur	ppm	ASTM D5185m		20473	22808	19401
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		21	19	22
Potassium	ppm	ASTM D5185m	>20	0	5	1
Water	%	ASTM D6304	>0.05	0.023	0.024	0.031
ppm Water	ppm	ASTM D6304	>500	234	240.2	316.7
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3252	12525	6838
Particles >6µm		ASTM D7647	>1300	951	▲ 3996	926
Particles >14µm		ASTM D7647	>80	52	A 282	1 53
Particles >21µm		ASTM D7647	>20	10	<u> </u>	41
Particles >38µm		ASTM D7647	>4	0	2	4
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	2 1/19/15	0/18/14
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.32	0.35





OIL ANALYSIS REPORT

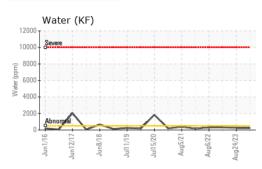

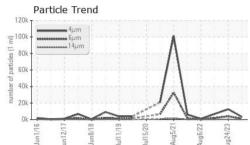


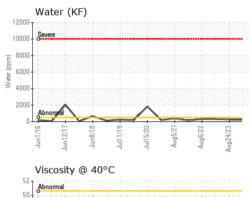





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.9	47.3	44.1
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						-
Bottom						

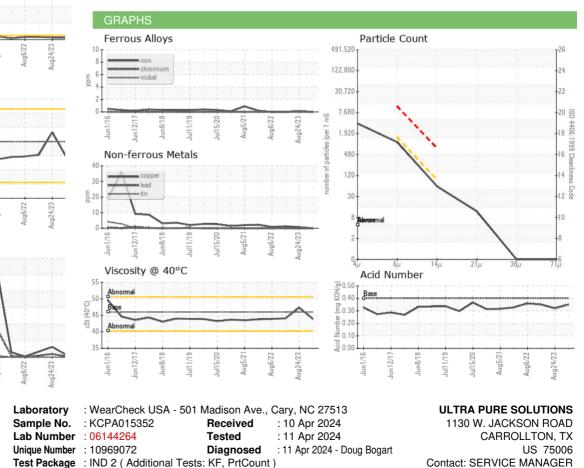

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ULTCAR [WUSCAR] 06144264 (Generated: 04/12/2024 06:09:49) Rev: 1

Certificate 12367

Contact/Location: SERVICE MANAGER ? - ULTCAR

T:

F: