

OIL ANALYSIS REPORT

Sample Rating Trend



Fluid KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	,,,,					
8070 (S/N 1	159)					
	100)					
		Mar2017	Apr2017 May2020	0 Apr2021 Mar2022	Apr2024	
SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
ample Number		Client Info		KCPA017125	KCP41073	KCP33673
ample Date		Client Info		02 Apr 2024	01 Mar 2022	22 Apr 2021
lachine Age	hrs	Client Info		23352	16702	14578
Dil Age	hrs	Client Info		3000	2124	2113
Dil Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
on	ppm	ASTM D5185m		0	0	<1
Chromium	ppm	ASTM D5185m		0	0	0
lickel	ppm	ASTM D5185m		0	0	0
ïtanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
luminum	ppm		>10	0	<1 0	0
ead	ppm	ASTM D5185m ASTM D5185m	>10	5	<1	2
copper ïn	ppm ppm	ASTM D5185m	>10	5 <1	<1	<1
Intimony	ppm	ASTM D5185m	>10			0
anadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	30	16	38
lolybdenum	ppm	ASTM D5185m		0	0	0
langanese	ppm	ASTM D5185m		0	0	<1
lagnesium	ppm	ASTM D5185m	90	55	75	65
Calcium	ppm	ASTM D5185m	2	<1	2	<1
hosphorus	ppm	ASTM D5185m		0	7	1
linc	ppm	ASTM D5185m		15	13	23
Sulfur	ppm	ASTM D5185m		20374	16270	17582
CONTAMINANTS	5	method	limit/base	current	history1	history2
ilicon	ppm	ASTM D5185m	>25	0	<1	2
Sodium	ppm	ASTM D5185m		10	11	13
otassium	ppm	ASTM D5185m		0	0	2
Vater pm Water	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	0.018 188	0.021 218.0	0.034 342.2
FLUID CLEANLIN		method	limit/base	current	history1	history2
	00-					
Particles >4µm		ASTM D7647 ASTM D7647	> 1200	3211 1001	6437	3307 911
Particles >6μm Particles >14μm		ASTM D7647 ASTM D7647	>1300	68	1958	80
Particles >21µm		ASTM D7647 ASTM D7647		16	27	23
Particles >38µm		ASTM D7647 ASTM D7647	>4	1	4	1
Particles >71µm		ASTM D7647		0	0	0
Dil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	18/14	17/13
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.35	0.33	0.336
0.21) Boy: 1	÷ 0					n. 2.2 WINDI


Report Id: WINPLA [WUSCAR] 06144268 (Generated: 04/12/2024 06:10:21) Rev: 1


Contact/Location: ? ? - WINPLA


NORMAL




OIL ANALYSIS REPORT

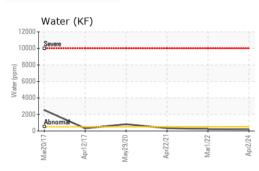

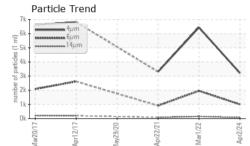

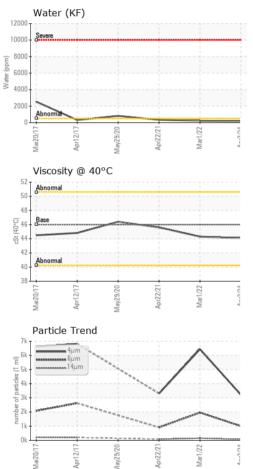

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.1	44.3	45.6
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom						\bigcirc

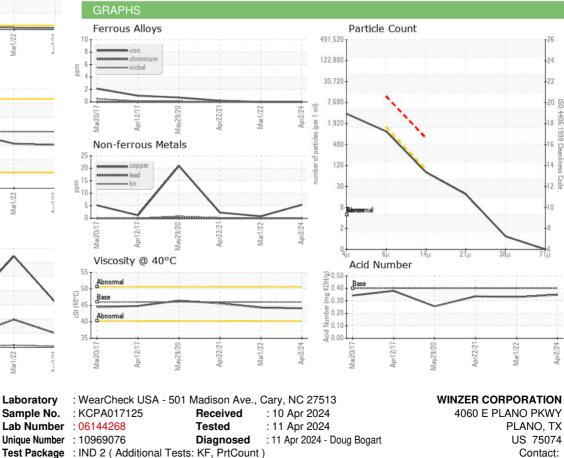

Report Id: WINPLA [WUSCAR] 06144268 (Generated: 04/12/2024 06:10:21) Rev: 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate 12367

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Contact/Location: ? ? - WINPLA

Page 2 of 2

T: