

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER ASD 25 5365498 (S/N 1084)

Component Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Nov2018	Jan2020	Jul2021 Oct2022	Apr2U24	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016950	KCP40959	KCP33198
Sample Date		Client Info		03 Apr 2024	04 Oct 2022	13 Jul 2021
Machine Age	hrs	Client Info		16171	13561	11425
Oil Age	hrs	Client Info		2606	2136	2393
Oil Changed	1113	Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead		ASTM D5185m	>10	0	0	0
	ppm	ASTM D5185m		3	4	2
Copper Tin	ppm	ASTM D5185m ASTM D5185m	>50 >10	0	4	0
	ppm		>10			0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	100	58	57	62
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	4	7
Zinc	ppm	ASTM D5185m	0	40	65	18
Sulfur	ppm	ASTM D5185m	23500	21438	23068	18260
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		29	19	22
Potassium	ppm	ASTM D5185m	>20	2	2	5
Water	%	ASTM D6304	>0.05	0.028	0.021	0.023
ppm Water	ppm	ASTM D6304	>500	282	216.9	234.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4899	7089	
Particles >6µm		ASTM D7647	>1300	e 1602	A 2667	
Particles >14µm		ASTM D7647	>80	94	A 261	
Particles >21µm		ASTM D7647		17	<u> </u>	
Particles >38µm		ASTM D7647	>4	0	1	
Particles >71µm		ASTM D7647		0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	• • 19/18/14	▲ 20/19/15	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.40	0.38	0.374
·20·24) Boy: 1						

Report Id: OLILAJ [WUSCAR] 06144283 (Generated: 04/12/2024 06:20:24) Rev: 1

Contact/Location: PURCHASING ? - OLILAJ



7

E Gk

- SI

te 4k 34

2k

0

1200

1000

800 (maa)

600 Water 400

200

1.20

(B/H0) Ê0.7 Ê 0.4 Pice 0.2

0.00

1000

600 Water (

4000

200

60

55

() 5(

3 45 B

4(

35

Abnorma

S

muu

lan 15/20

Water (KF)

Abnormal

Viscosity @ 40°C

OIL ANALYSIS REPORT

*Visual

*Visual

*Visua

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

NONE

NONE

NONE

NONE

NONE


NONE

NORML

NORML

>0.05

45

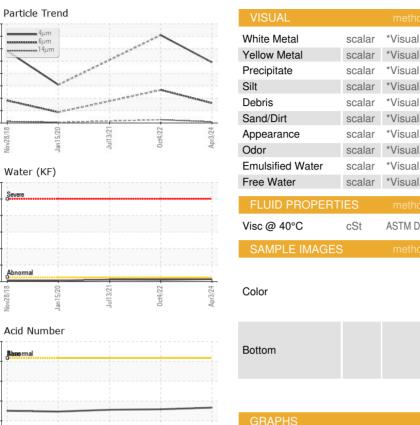


0ct4/22 -

Dct4/22

0ct4/22

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

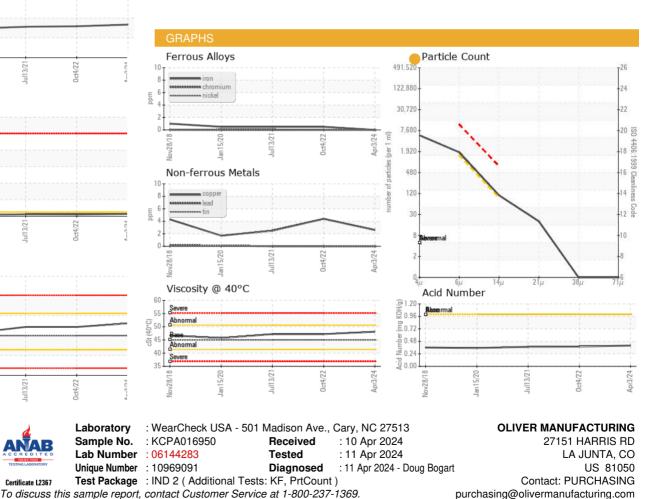

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

48.1

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

47.2

NONE

NONE

NONE

NONE

A MODER

NONE

NORML

NORML

NEG

NEG

47.2

Report Id: OLILAJ [WUSCAR] 06144283 (Generated: 04/12/2024 06:20:24) Rev: 1

Certificate 12367

Contact/Location: PURCHASING ? - OLILAJ

Page 2 of 2

T:

F: