




OIL ANALYSIS REPORT

Sample Rating Trend

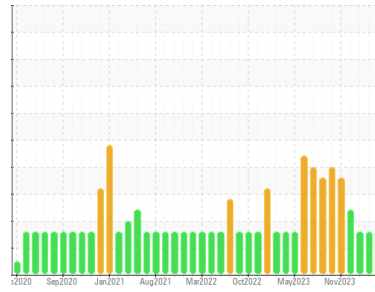

WATER



Machine Id
CF6201 (S/N 00881-003-1-01-01)

Component
Gearbox
Fluid
MOBIL GLYGOYLE 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USP0007869	USP0007634	USP0007162
Sample Date	Client Info	28 Mar 2024	21 Feb 2024	06 Feb 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ATTENTION	ATTENTION	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >200	12	2	2
Chromium	ppm	ASTM D5185m >15	1	0	0
Nickel	ppm	ASTM D5185m >15	1	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	5	<1	0
Lead	ppm	ASTM D5185m >100	<1	<1	0
Copper	ppm	ASTM D5185m >200	<1	0	1
Tin	ppm	ASTM D5185m >25	1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	0
Manganese	ppm	ASTM D5185m	<1	0	0
Magnesium	ppm	ASTM D5185m	<1	0	0
Calcium	ppm	ASTM D5185m	6	0	0
Phosphorus	ppm	ASTM D5185m	590	570	555
Zinc	ppm	ASTM D5185m	0	0	0
Sulfur	ppm	ASTM D5185m	598	683	468

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	2	<1	0
Sodium	ppm	ASTM D5185m	13	<1	0
Potassium	ppm	ASTM D5185m >20	2	2	0
Water	%	ASTM D6304 >0.2	0.362	0.289	0.434
ppm Water	ppm	ASTM D6304 >2000	2617	2890	4340

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	18729	9873	9384
Particles >6µm	ASTM D7647 >5000	4683	3217	1446
Particles >14µm	ASTM D7647 >640	326	283	77
Particles >21µm	ASTM D7647 >160	82	75	20
Particles >38µm	ASTM D7647 >40	3	6	0
Particles >71µm	ASTM D7647 >10	1	1	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	21/19/16	20/19/15	20/18/13

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	0.28	0.28




OIL ANALYSIS REPORT

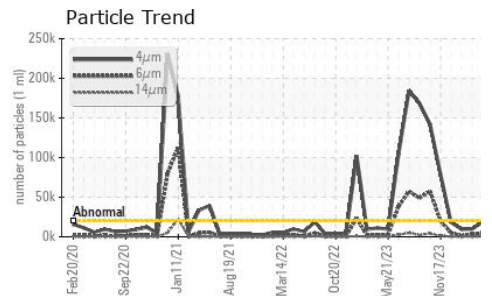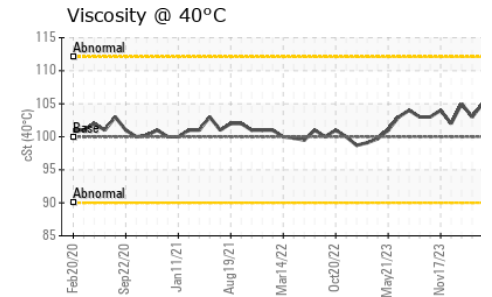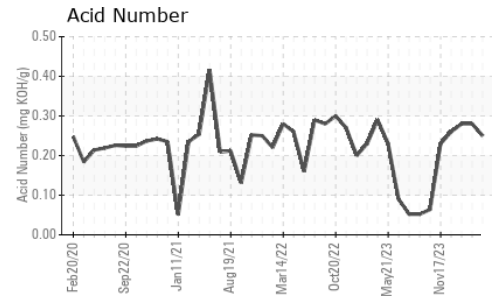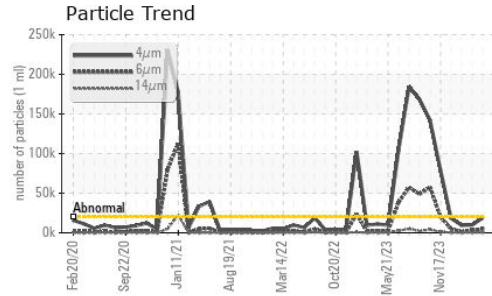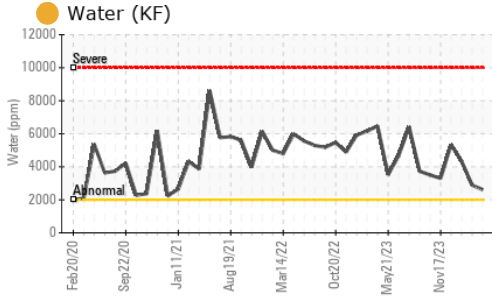






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	100.0	105	103

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

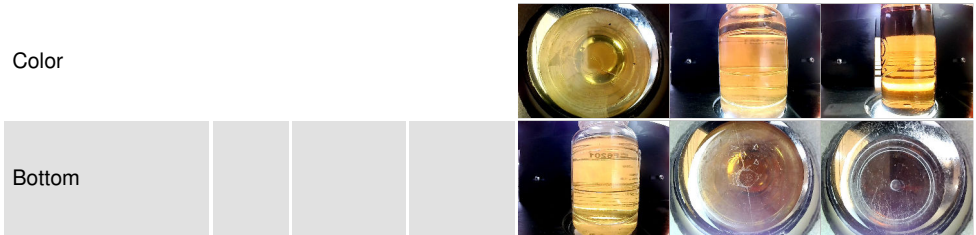

GRAPHS

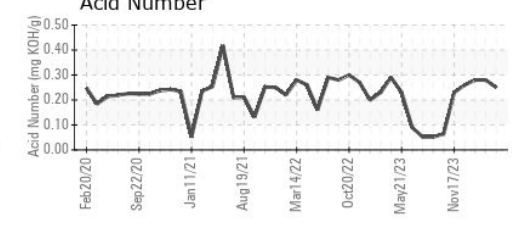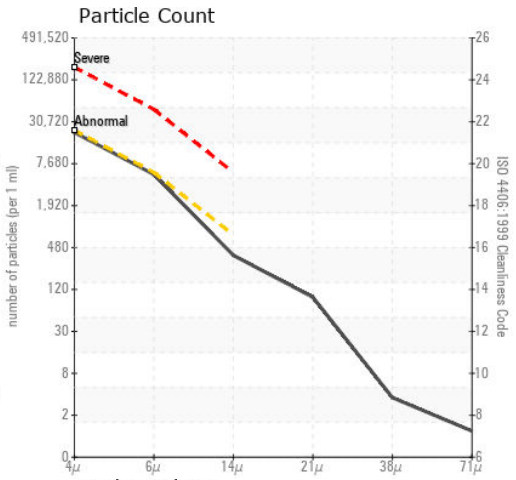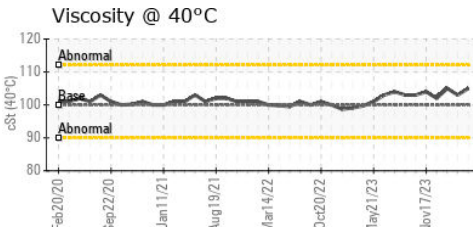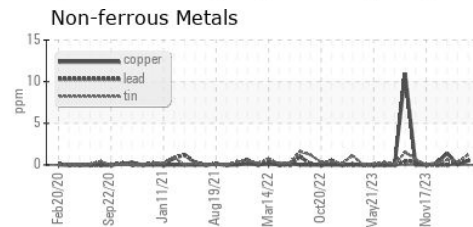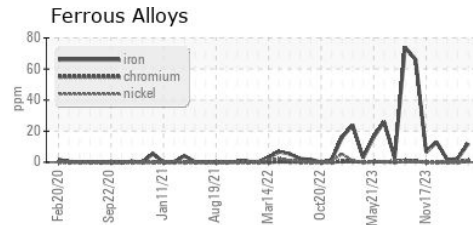

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : USP0007869
 Lab Number : 06144308
 Unique Number : 10969116
 Test Package : IND 2

Received : 10 Apr 2024
 Tested : 15 Apr 2024
 Diagnosed : 15 Apr 2024 - Doug Bogart

POET BIO PROCESSING
 1277 102ND ST
 FAIRBANK, IA
 US 50662
 Contact: JASON GOEDKEN
 Jason.Goedken@POET.COM
 T: (319)284-2621
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)