




OIL ANALYSIS REPORT

Sample Rating Trend

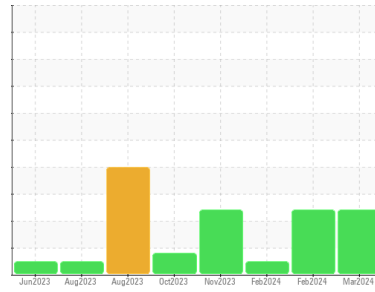

FUEL



Machine Id
THOMPKINS 4 IN VAC PUMP 337
 Component
Diesel Engine
 Fluid
PETRO CANADA 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0917048	WC0906058	WC0906039
Sample Date	Client Info		11 Mar 2024	26 Feb 2024	09 Feb 2024
Machine Age	hrs	Client Info	63	9677	9406
Oil Age	hrs	Client Info	400	521	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			SEVERE	SEVERE	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	3	6	6
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	1
Lead	ppm	ASTM D5185m	>40	0	2	1
Copper	ppm	ASTM D5185m	>330	0	<1	0
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<1	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		47	59	64
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		796	1020	1106
Calcium	ppm	ASTM D5185m		855	1009	1104
Phosphorus	ppm	ASTM D5185m		864	1042	1108
Zinc	ppm	ASTM D5185m		1046	1350	1454
Sulfur	ppm	ASTM D5185m		2950	3186	3495

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	6	6	7
Sodium	ppm	ASTM D5185m		2	0	<1
Potassium	ppm	ASTM D5185m	>20	2	0	0
Fuel	%	ASTM D3524	>5	▲ 15.2	▲ 11.9	<1.0

INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.5	7.0	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	17.8	17.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	14.5	14.5
Base Number (BN)	mg KOH/g	ASTM D2896		8.0	7.9	8.4











OIL ANALYSIS REPORT

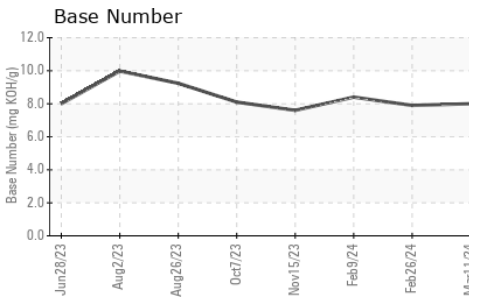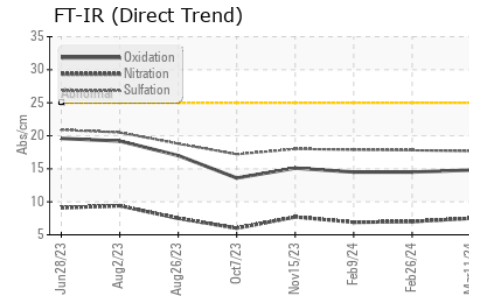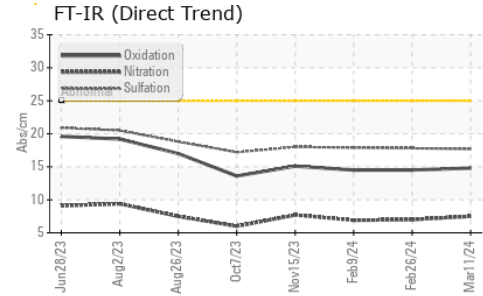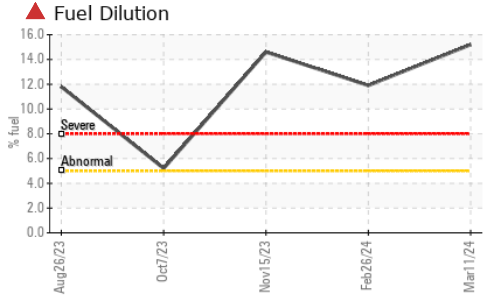

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.2	▲ 11.1	12.6

GRAPHS

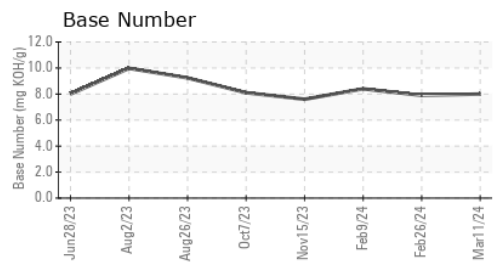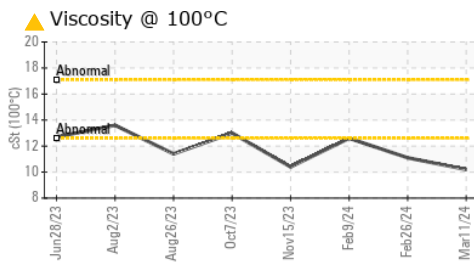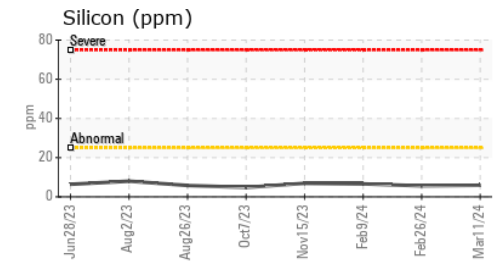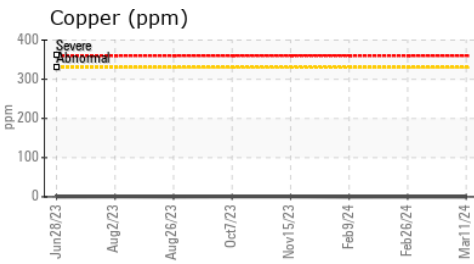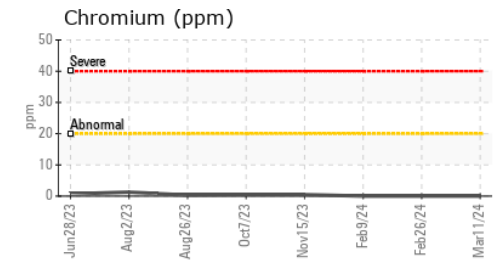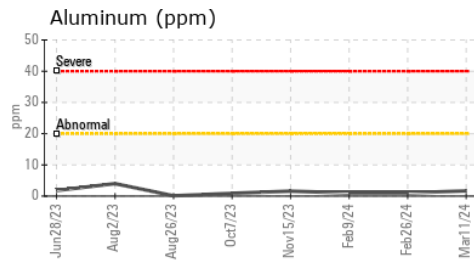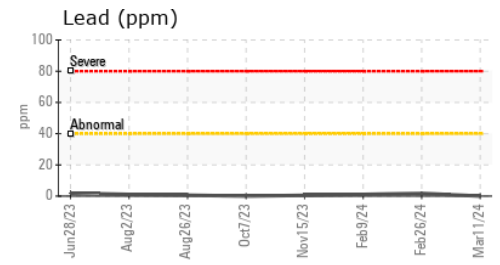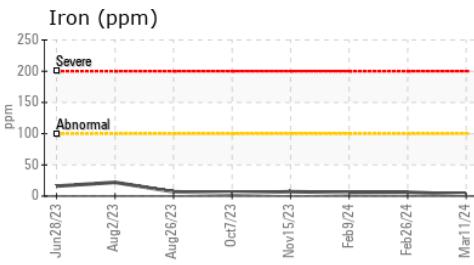

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917048 **Received** : 10 Apr 2024
Lab Number : 06145161 **Tested** : 15 Apr 2024
Unique Number : 10969969 **Diagnosed** : 15 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

C.L. BENTON & SONS INC
 706 38TH AVE N
 MYRTLE BEACH, SC
 US 29577
 Contact: NEIL
 neil@clbenton.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)