

# **OIL ANALYSIS REPORT**

Sample Rating Trend

**WATER** 

Machine Id

# LEROI 112722 (S/N LE19442)

**Rotary Compressor** 

{not provided} (--- GAL)

### **DIAGNOSIS**

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil. There is a moderate concentration of water present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		<u>-</u>		Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO90004037		
Sample Date		Client Info		04 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		Changed		
Sample Status		Oliciti IIIIo		ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	2		
Chromium		ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
	ppm	ASTM D5185m		0		
Titanium Silver	ppm			-		
	ppm	ASTM D5185m	0	0 2		
Aluminum	ppm					
Lead	ppm	ASTM D5185m	>4	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>3	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		4		
Phosphorus	ppm	ASTM D5185m		45		
Zinc	ppm	ASTM D5185m		8		
Sulfur	ppm	ASTM D5185m		446		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>45	0		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.6	<u>0.913</u>		
ppm Water	ppm	ASTM D6304		<b>△</b> 9134		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>127601</b>		
Particles >6µm		ASTM D7647	>2500	<b>4</b> 31108		
Particles >14µm		ASTM D7647	>320	<b>A</b> 8649		
Particles >21µm		ASTM D7647	>80	<b>4518</b>		
Particles >38µm		ASTM D7647	>20	<b>^</b> 269		
Particles >71µm		ASTM D7647	>4	3		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>4</b> 24/22/20		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Asid Number (AN)	ma 1/011/a	ACTM DODAE		0.20		


Acid Number (AN)

mg KOH/g ASTM D8045

0.30



## **OIL ANALYSIS REPORT**

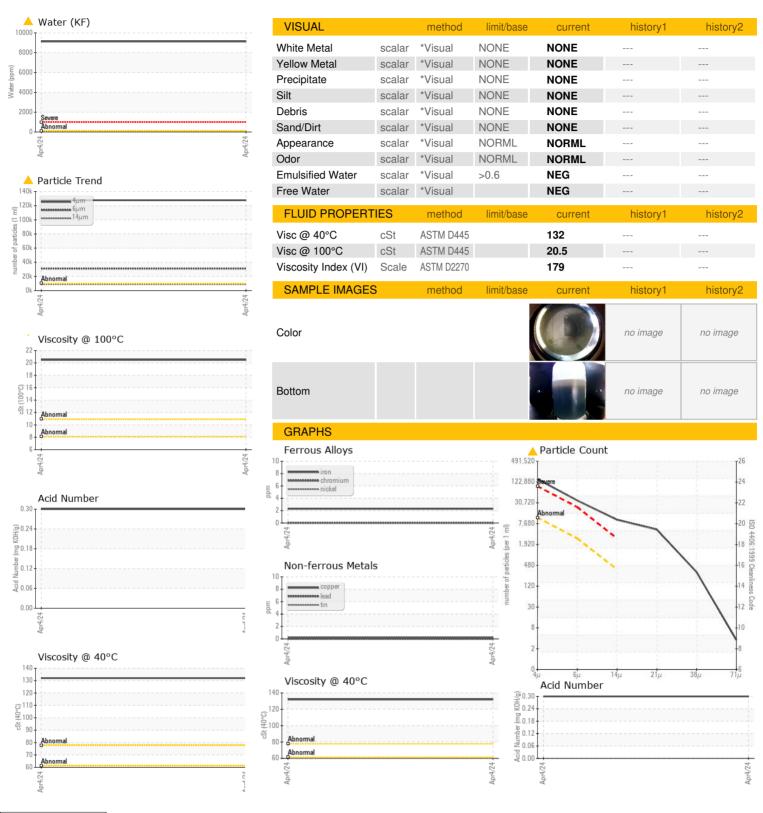





Certificate 12367

Laboratory Sample No.

: TO90004037 Lab Number

: 06145305 Unique Number : 10970113

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 10 Apr 2024

**Tested** : 12 Apr 2024 Diagnosed

: 15 Apr 2024 - Jonathan Hester Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

CARLSBAD, NM UM 88220-8923 Contact: CARLOS LEAL cleal@cimarron.com

4425 GRANDI RD, UNIT F

**CIMARRON ENERGY - CARLSBAD** 

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CIMCAR [WUSCAR] 06145305 (Generated: 06/13/2024 12:29:46) Rev: 1

Contact/Location: CARLOS LEAL - CIMCAR

T:

F: