




OIL ANALYSIS REPORT

Sample Rating Trend

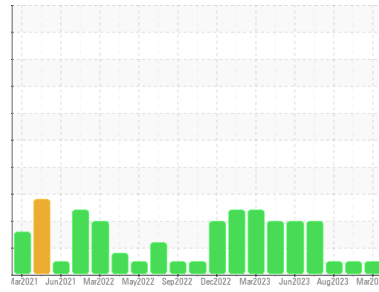

NORMAL



Machine Id
R8-G-003

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0013929	KL0013874	KL0012487
Sample Date	Client Info		29 Mar 2024	28 Feb 2024	18 Aug 2023
Machine Age	days	Client Info	45371	0	45155
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	40	51	71
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	3	<1
Lead	ppm	ASTM D5185m >40	8	11	12
Copper	ppm	ASTM D5185m >330	18	22	38
Tin	ppm	ASTM D5185m >15	<1	1	1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	262	147	145
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	119	108	103
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m 450	667	698	721
Calcium	ppm	ASTM D5185m 3000	1575	1418	1533
Phosphorus	ppm	ASTM D5185m 1150	876	805	789
Zinc	ppm	ASTM D5185m 1350	961	978	966
Sulfur	ppm	ASTM D5185m 4250	3031	2742	3205

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	5	6
Sodium	ppm	ASTM D5185m >216	4	5	7
Potassium	ppm	ASTM D5185m >20	2	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.5	0.8
Nitration	Abs/cm	*ASTM D7624 >20	11.1	11.7	12.9
Sulfation	Abs./1mm	*ASTM D7415 >30	27.2	26.3	28.5



OIL ANALYSIS REPORT

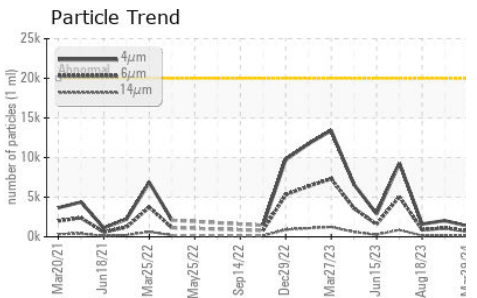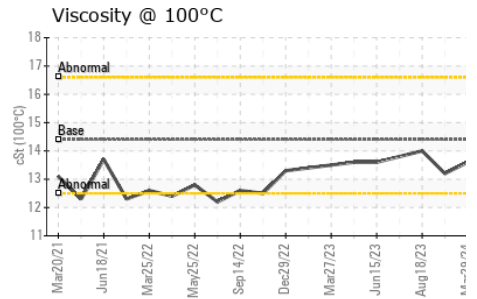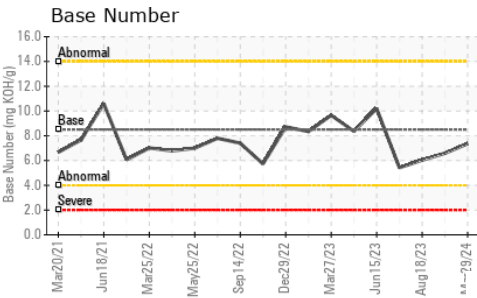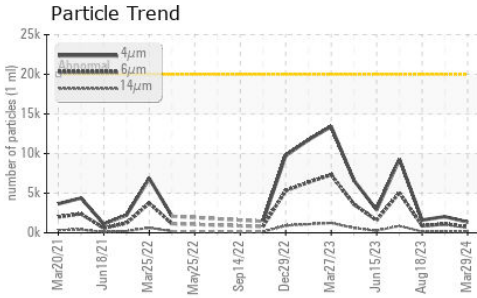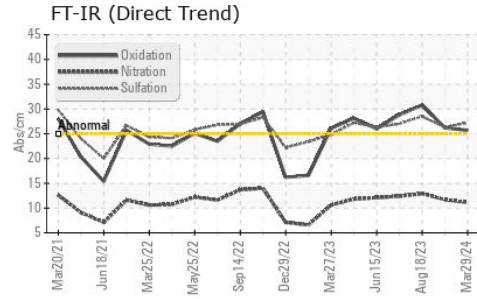






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	1348	2036	1609
Particles >6µm	ASTM D7647	>5000	735	1109	877
Particles >14µm	ASTM D7647	>640	125	189	149
Particles >21µm	ASTM D7647	>160	42	64	50
Particles >38µm	ASTM D7647	>40	7	10	8
Particles >71µm	ASTM D7647	>10	1	1	1
Oil Cleanliness	ISO 4406 (c)	>21/19/16	18/17/14	18/17/15	18/17/14

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414 >25	25.7	26.2	30.8
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.36	6.59	6.03

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14.4	13.6	13.2	14.0

GRAPHS

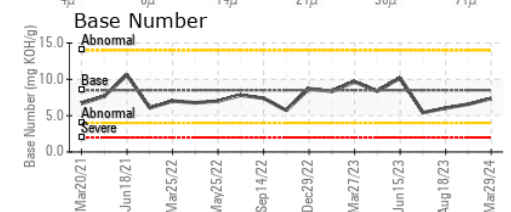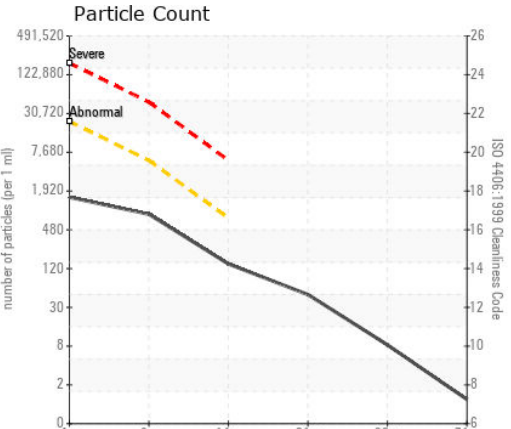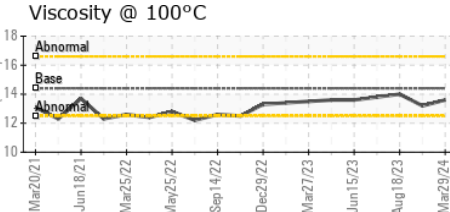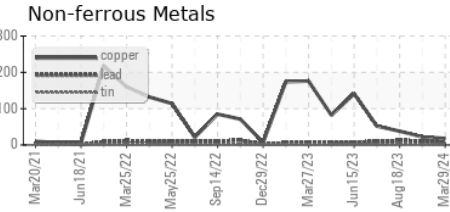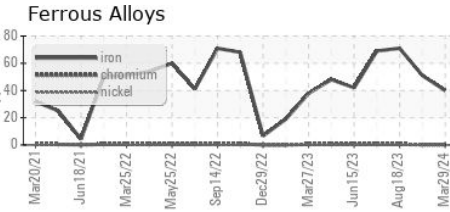

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KL0013929

Lab Number : **06145358**

Unique Number : 10970166

Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 10 Apr 2024

Tested : 15 Apr 2024

Diagnosed : 15 Apr 2024 - Jonathan Hester

MCVAY DRILLING

401 E BENDER BLVD

HOBBS, NM

US 88241

Contact: DOMINIK MENDOZA

dominik4819@yahoo.com

T: (575)393-8969

F: (575)393-7455