





# OIL ANALYSIS REPORT



Machine Id  
**VOLVO EC220E 314010**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### Sample Rating Trend

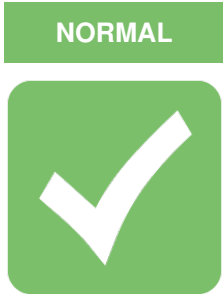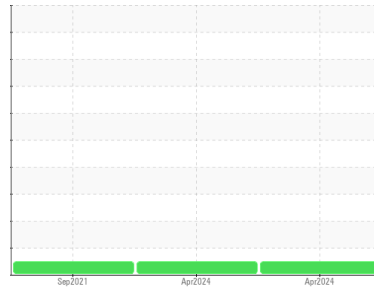

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ML0000241</b>	ML0000263	VCP320360
Sample Date	Client Info			<b>09 Apr 2024</b>	08 Apr 2024	09 Sep 2021
Machine Age	hrs	Client Info		<b>5008</b>	3913	1950
Oil Age	hrs	Client Info		<b>500</b>	200	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>14</b>	29	20
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>4</b>	5	2
Lead	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m	>15	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>41</b>	160	58
Barium	ppm	ASTM D5185m	10	<b>5</b>	<1	0
Molybdenum	ppm	ASTM D5185m	100	<b>72</b>	79	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>732</b>	480	794
Calcium	ppm	ASTM D5185m	3000	<b>1815</b>	1845	1563
Phosphorus	ppm	ASTM D5185m	1150	<b>1188</b>	1068	832
Zinc	ppm	ASTM D5185m	1350	<b>1466</b>	1351	914
Sulfur	ppm	ASTM D5185m	4250	<b>4352</b>	4121	3117

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	11	5
Sodium	ppm	ASTM D5185m	>216	<b>1</b>	1	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	9.0	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.5</b>	20.1	19.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.9</b>	15.8	14.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	6.5	---





# OIL ANALYSIS REPORT

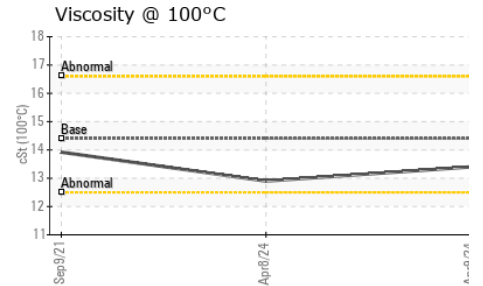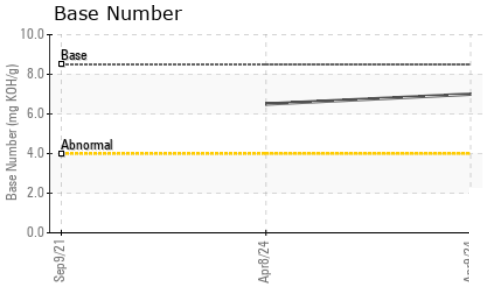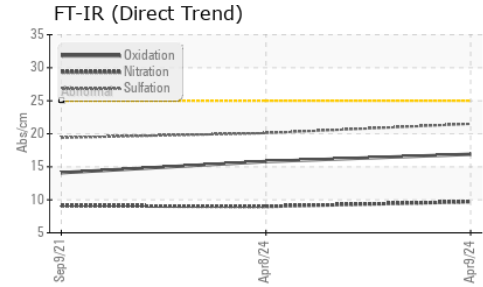

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	12.9

## GRAPHS

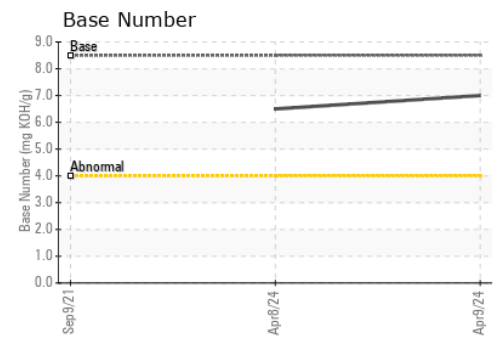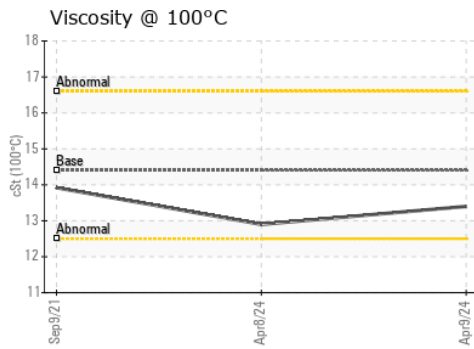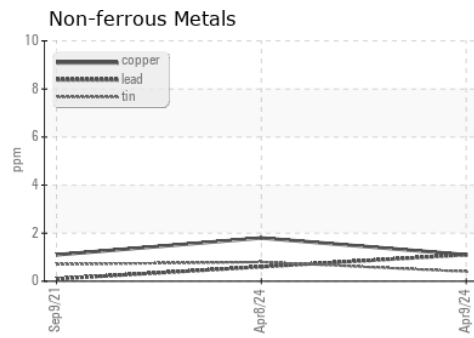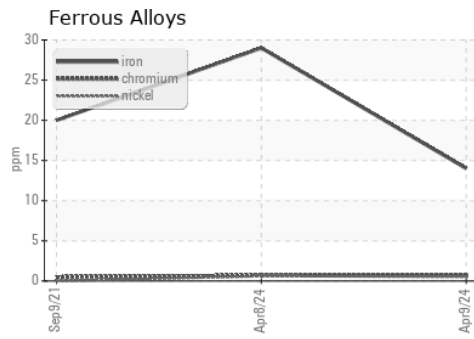

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000241 **Received** : 11 Apr 2024  
**Lab Number** : 06145720 **Tested** : 12 Apr 2024  
**Unique Number** : 10970528 **Diagnosed** : 14 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**MCCLUNG-LOGAN EQUIPMENT CO - SALEM**  
 2025 COOK DRIVE  
 SALEM, VA  
 US 24153  
 Contact: SCOTT CARR  
 scarr@mcclung-logan.com  
 T: (540)418-5218  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)