




# OIL ANALYSIS REPORT

Sample Rating Trend

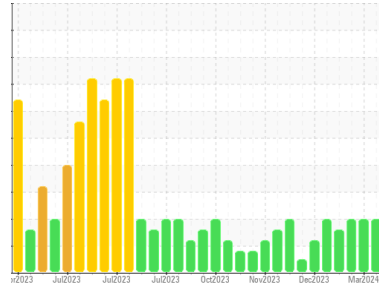

ISO



Area  
**RIG 879**  
 Machine Id  
**R879-MP-02**  
 Component  
**Gearbox**  
 Fluid  
**GEAR OIL ISO 320 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0014302</b>	KL0013732	KL0013942
Sample Date	Client Info		<b>03 Apr 2024</b>	05 Mar 2024	06 Feb 2024
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>40</b>	47	59
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	3	5
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>3</b>	4	5
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>4</b>	4	4
Barium	ppm	ASTM D5185m 15	<b>5</b>	3	18
Molybdenum	ppm	ASTM D5185m 15	<b>0</b>	<1	1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 50	<b>4</b>	0	10
Calcium	ppm	ASTM D5185m 50	<b>31</b>	44	141
Phosphorus	ppm	ASTM D5185m 350	<b>129</b>	95	131
Zinc	ppm	ASTM D5185m 100	<b>60</b>	61	95
Sulfur	ppm	ASTM D5185m 12500	<b>9849</b>	8408	8120

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>12</b>	18	25
Sodium	ppm	ASTM D5185m	<b>24</b>	85	69
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>▲ 156838</b>	▲ 176742	▲ 180816
Particles >6µm	ASTM D7647	>5000	<b>▲ 53519</b>	▲ 84787	▲ 97750
Particles >14µm	ASTM D7647	>640	<b>▲ 909</b>	▲ 2264	▲ 2193
Particles >21µm	ASTM D7647	>160	<b>▲ 144</b>	▲ 310	▲ 195
Particles >38µm	ASTM D7647	>40	<b>5</b>	3	3
Particles >71µm	ASTM D7647	>10	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>▲ 24/23/17</b>	▲ 25/24/18	▲ 25/24/18


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	<b>0.48</b>	0.51	0.51




# OIL ANALYSIS REPORT


## Particle Trend

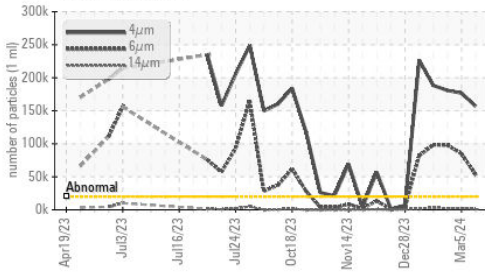


## Particle Trend

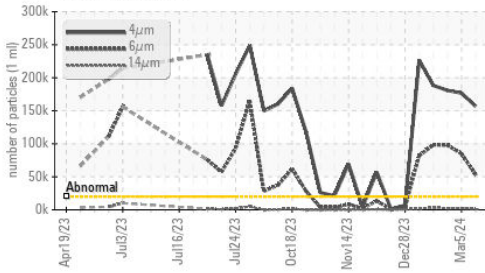

## Acid Number

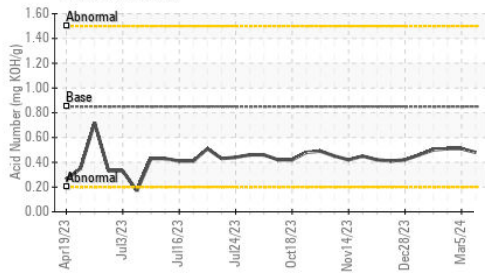


## Viscosity @ 40°C

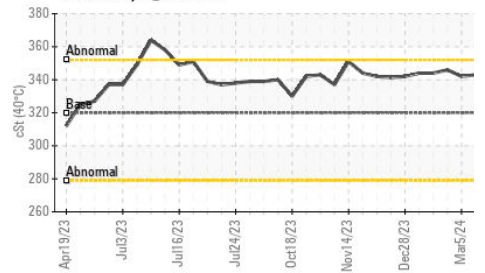

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	343	342

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

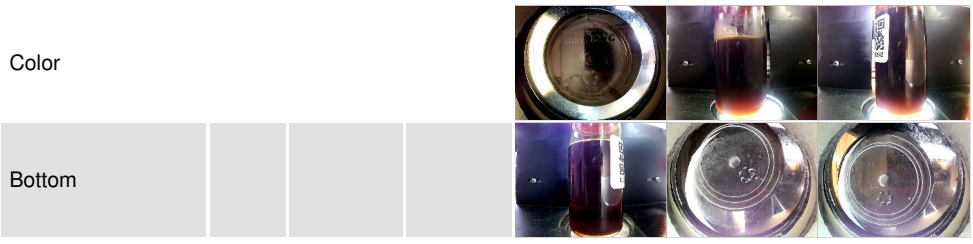


## GRAPHS


### Ferrous Alloys

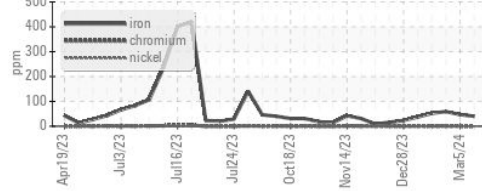


### Non-ferrous Metals

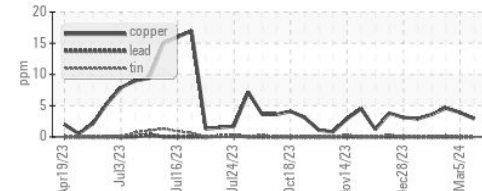


### Viscosity @ 40°C

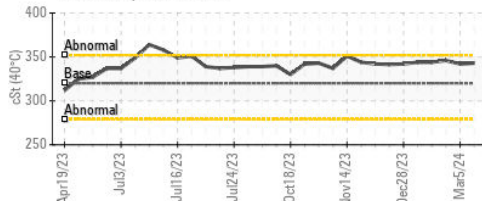

### Particle Count

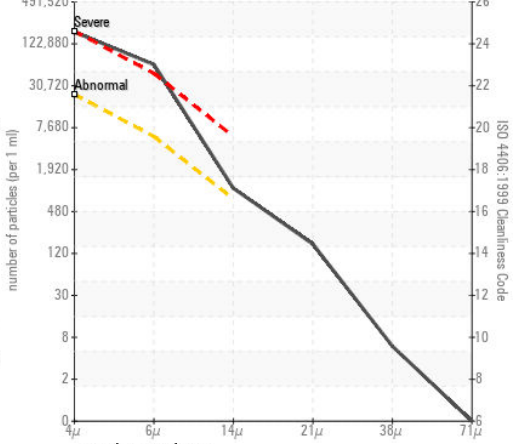

### Acid Number

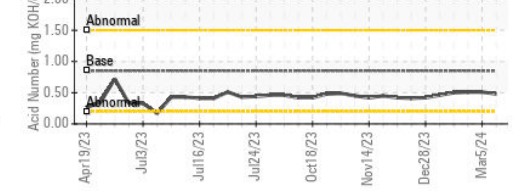

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014302 **Received** : 11 Apr 2024  
**Lab Number** : 06145837 **Tested** : 12 Apr 2024  
**Unique Number** : 10975915 **Diagnosed** : 15 Apr 2024 - Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**PATTERSON - UTI DRILLING**  
 9915 WEST INDUSTRIAL  
 MIDLAND, TX  
 US 79706  
 Contact: RICKY MATA  
 ricky.mata@patenergy.com  
 T: (832)219-4559  
 F: (432)561-9388

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)