




OIL ANALYSIS REPORT

Sample Rating Trend

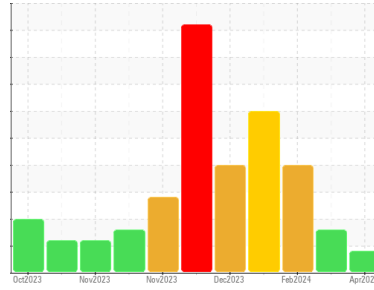

ISO



Area
RIG 813
 Machine Id
R813-MP-02
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0014298	KL0013738	KL0013729
Sample Date	Client Info			03 Apr 2024	05 Mar 2024	18 Feb 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	13	10	23
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	0	0	2
Lead	ppm	ASTM D5185m	>50	1	0	4
Copper	ppm	ASTM D5185m	>200	4	6	22
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	6	5
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	50	6	0	16
Calcium	ppm	ASTM D5185m	50	10	4	31
Phosphorus	ppm	ASTM D5185m	350	381	324	381
Zinc	ppm	ASTM D5185m	100	0	4	36
Sulfur	ppm	ASTM D5185m	12500	23364	20081	18189

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	2	5
Sodium	ppm	ASTM D5185m		7	7	15
Potassium	ppm	ASTM D5185m	>20	0	0	3


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	24857	▲ 124776	11136
Particles >6µm		ASTM D7647	>5000	4610	▲ 37841	● 6066
Particles >14µm		ASTM D7647	>640	146	▲ 874	● 1032
Particles >21µm		ASTM D7647	>160	35	130	● 348
Particles >38µm		ASTM D7647	>40	1	2	● 54
Particles >71µm		ASTM D7647	>10	0	0	5
Oil Cleanliness		ISO 4406 (c)	>21/19/16	22/19/14	▲ 24/22/17	● 21/20/17

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.88	1.06	0.78




OIL ANALYSIS REPORT


● Particle Trend

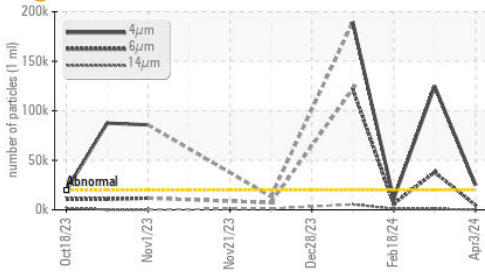


● Particle Trend

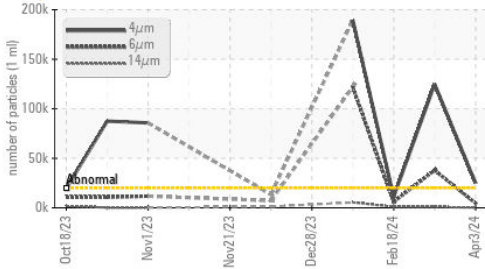

Acid Number

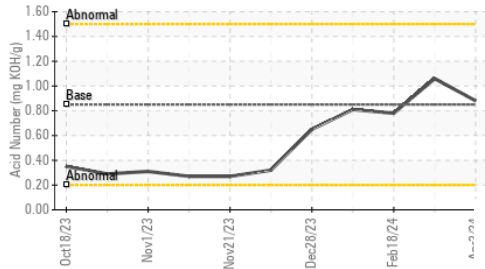


Viscosity @ 40°C

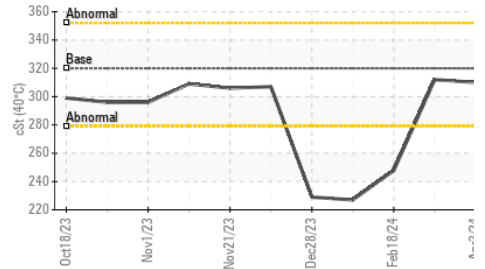

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	310	312 ● 247.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

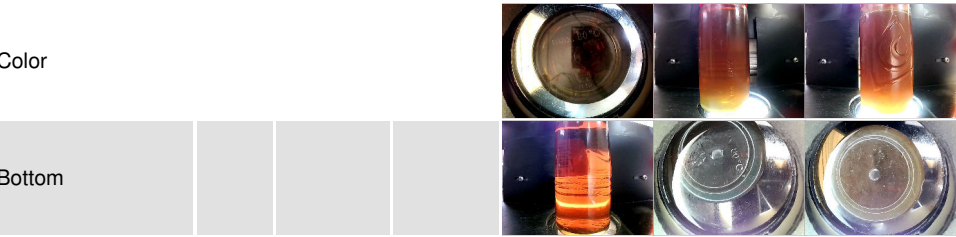


GRAPHS


Ferrous Alloys

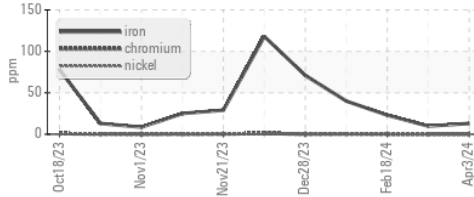


Non-ferrous Metals

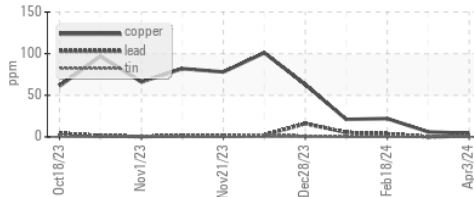


Viscosity @ 40°C

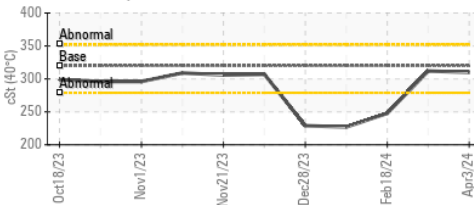

● Particle Count

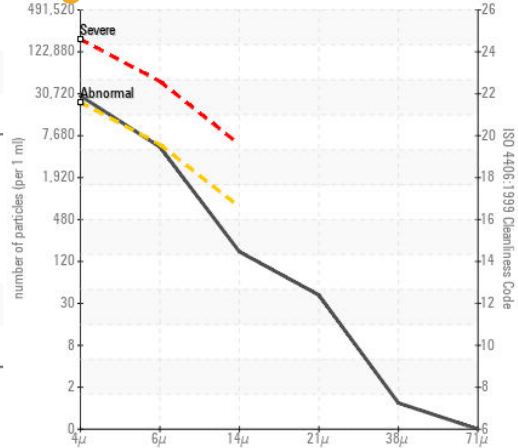

Acid Number

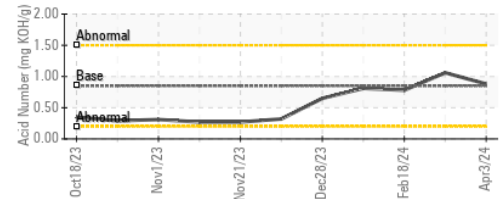

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014298
Lab Number : 06145841
Unique Number : 10975919
Test Package : MOB 2 (Additional Tests: PrtCount)
Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 15 Apr 2024 - Don Baldrige

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388