




# OIL ANALYSIS REPORT

## Sample Rating Trend

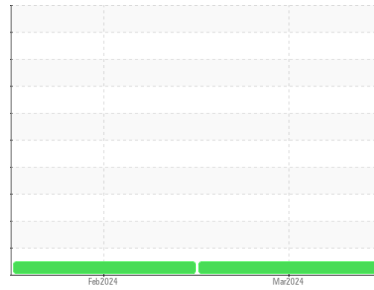

**NORMAL**



Machine Id  
**PETERBILT Red Peterbilt**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (10 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0004115</b>	SBP0004120	---
Sample Date	Client Info			<b>20 Mar 2024</b>	08 Feb 2024	---
Machine Age	mls	Client Info		<b>379653</b>	363893	---
Oil Age	mls	Client Info		<b>15760</b>	16000	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>23</b>	33	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	3	---
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	5	---
Copper	ppm	ASTM D5185m	>85	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>52</b>	59	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>21</b>	4	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>344</b>	50	---
Calcium	ppm	ASTM D5185m		<b>1973</b>	2313	---
Phosphorus	ppm	ASTM D5185m		<b>1075</b>	987	---
Zinc	ppm	ASTM D5185m		<b>1239</b>	1278	---
Sulfur	ppm	ASTM D5185m		<b>3535</b>	3034	---






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>3</b>	5	---
Sodium	ppm	ASTM D5185m		<b>2</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	11	---
Water	%	ASTM D6304	>0.2	<b>0.032</b>	---	---
ppm Water	ppm	ASTM D6304	>2000	<b>324</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	10.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.5</b>	32.1	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.6</b>	28.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.9</b>	4.94	---







# OIL ANALYSIS REPORT

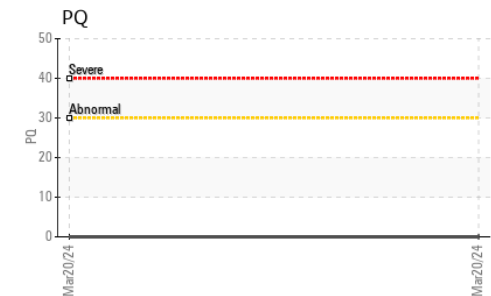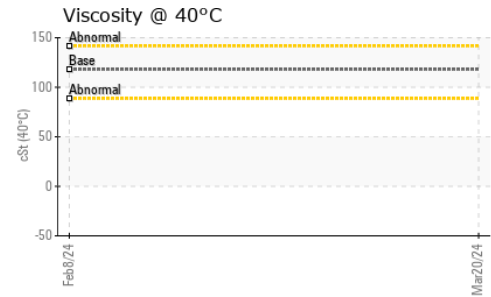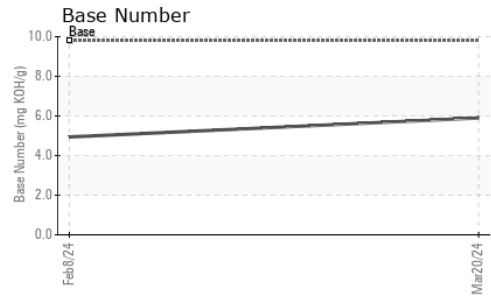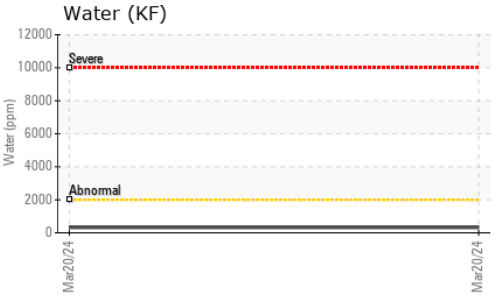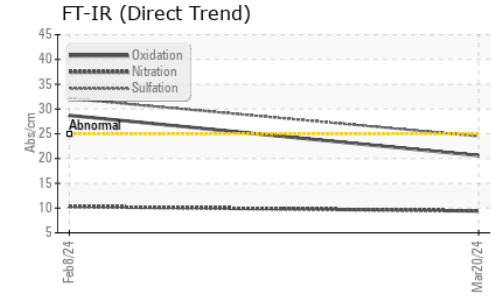

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>14.42</b>	14.7	---

## GRAPHS

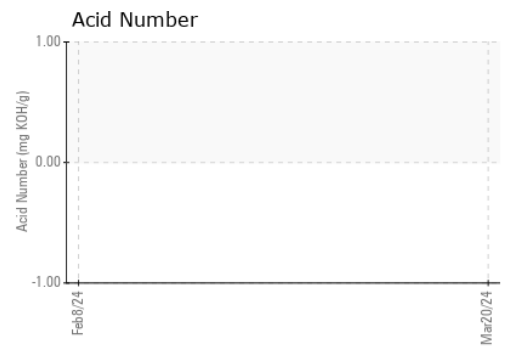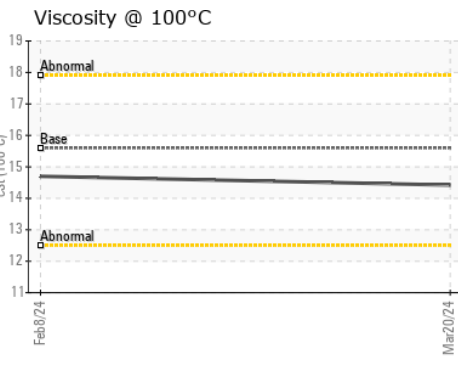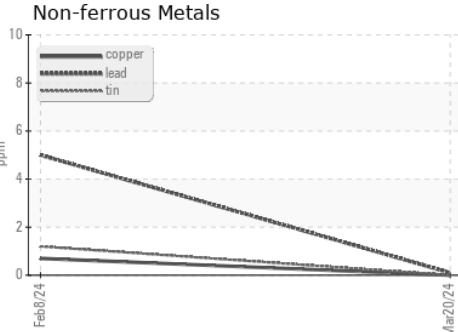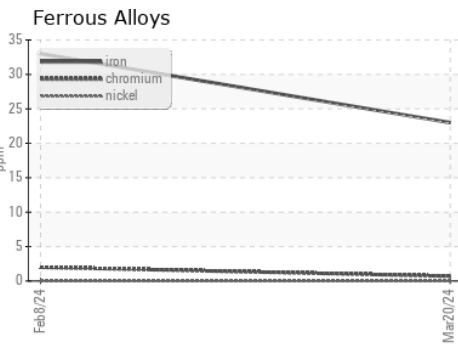

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004115      **Received** : 11 Apr 2024  
**Lab Number** : **06145863**      **Tested** : 18 Apr 2024  
**Unique Number** : 10975941      **Diagnosed** : 18 Apr 2024 - Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: FT-IR, KV100, TBN )

**RODNEY BROWN**  
 8834 587TH AVE  
 PONCA, NE  
 US 68770

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: TRAVIS GARRISON  
garrison092012@gmail.com

T:  
F: