


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

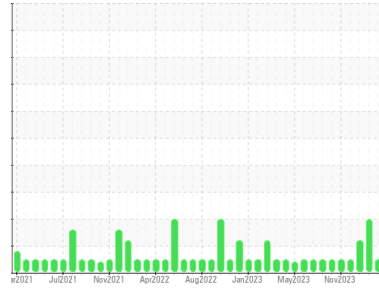

Machine Id
SSI PR6600
Component
Hydraulic System
Fluid
WEBER VIS HZ-100-68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			Y2K0001643	Y2K0001600	Y2K0001499
Sample Date	Client Info			06 Apr 2024	04 Mar 2024	27 Jan 2024
Machine Age	hrs	Client Info		27140	26852	26398
Oil Age	hrs	Client Info		1060	772	318
Oil Changed	Client Info			Not Changed	Not Changd	Not Changed
Sample Status				NORMAL	ABNORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	0	<1	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		6	7	3
Calcium	ppm	ASTM D5185m		33	27	20
Phosphorus	ppm	ASTM D5185m		815	794	768
Zinc	ppm	ASTM D5185m		1015	1075	1043
Sulfur	ppm	ASTM D5185m		2982	3184	2700

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	0	<1	<1
Sodium	ppm	ASTM D5185m		3	4	3
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water	%	ASTM D6304	>0.1	0.003	0.002	0.003
ppm Water	ppm	ASTM D6304	>1000	40	16	40

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1288	● 3008	● 3198
Particles >6µm		ASTM D7647	>640	262	● 1263	● 753
Particles >14µm		ASTM D7647	>80	31	▲ 172	71
Particles >21µm		ASTM D7647	>20	13	▲ 54	25
Particles >38µm		ASTM D7647	>4	1	2	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	17/15/12	▲ 19/17/15	● 19/17/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.86	0.85	1.02


OIL ANALYSIS REPORT

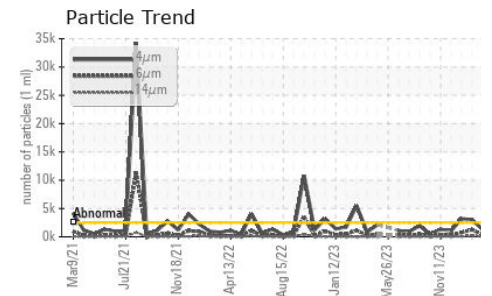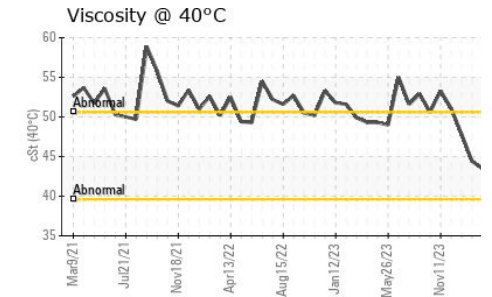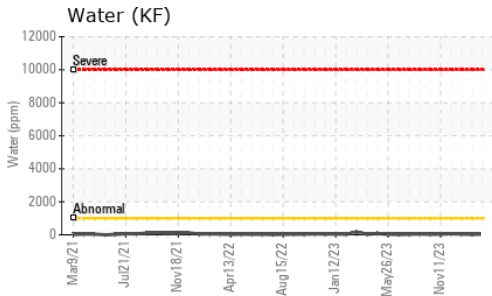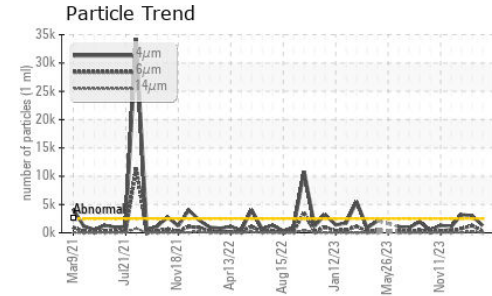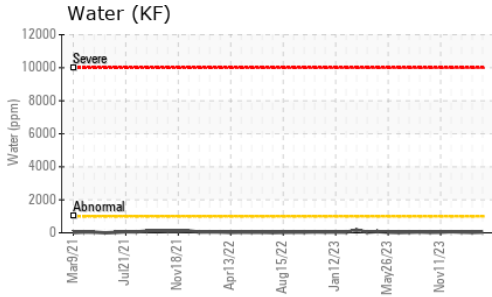






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.5	44.4	47.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

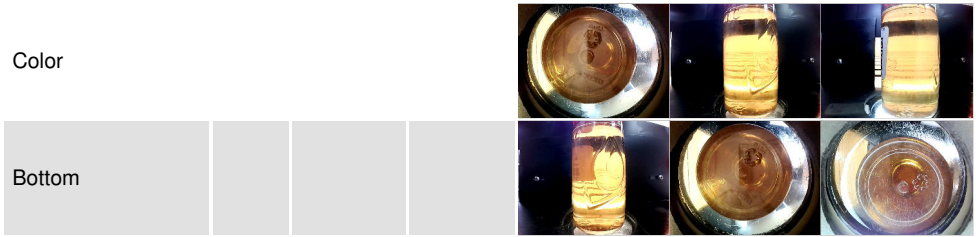

GRAPHS

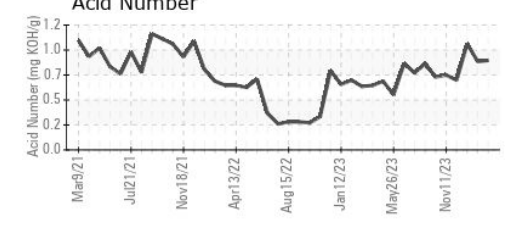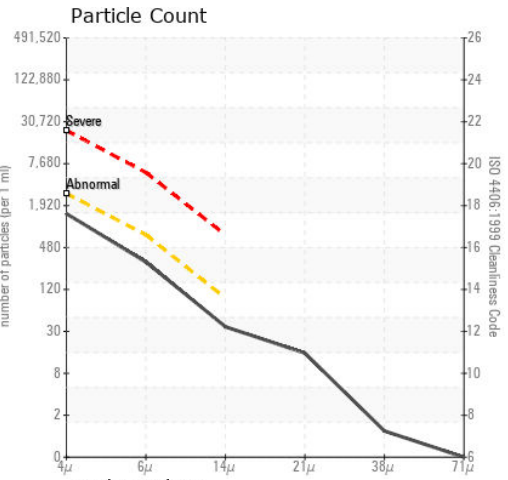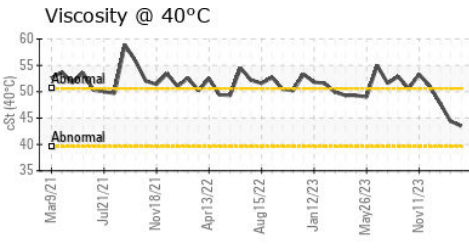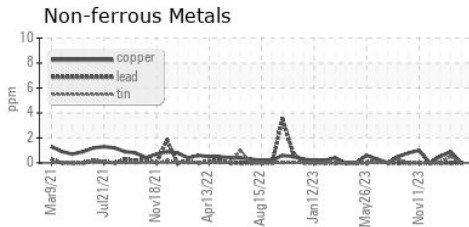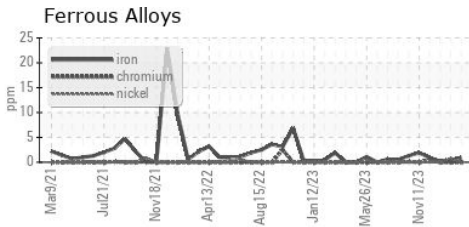

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : Y2K0001643
Lab Number : 06145866
Unique Number : 10975944
Test Package : MOB 2 (Additional Tests: KF)
Received : 11 Apr 2024
Tested : 12 Apr 2024
Diagnosed : 12 Apr 2024 - Wes Davis

COOPER TANK
 123 VARICK AVE
 BROOKLYN, NY
 US 11237

Contact: RAY KVEDARAS
 rkvedaras@coopertank.com
 T: (718)384-7727
 F:
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)