


OIL ANALYSIS REPORT

Sample Rating Trend

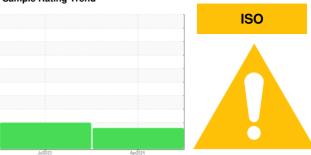

Machine Id

5652351 (S/N 1052)

Component Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jul2023	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number	17 (1101)	Client Info	III III Dasc	KCPA014911	KCPA004961	
Sample Number		Client Info		04 Apr 2024	17 Jul 2023	
Machine Age	hrs	Client Info		28321	26836	
Oil Age	hrs	Client Info		0	0	
Oil Changed	1113	Client Info		Changed	N/A	
Sample Status		Oliciti IIIIo		ABNORMAL	ABNORMAL	
				-		
WEAR METALS		method	limit/base	current	history1	history2
Iron Chromium	ppm	ASTM D5185m	>50	0	2	
Nickel	ppm		>10	-	0	
	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m		<1	2	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		5	4	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	<1	3	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m	90	9	10	
Calcium	ppm	ASTM D5185m	2	<1	0	
Phosphorus	ppm	ASTM D5185m		0	162	
Zinc	ppm	ASTM D5185m		47	58	
Sulfur	ppm	ASTM D5185m		20131	13299	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	2	
Sodium	ppm	ASTM D5185m		4	1	
Potassium	ppm	ASTM D5185m	>20	0	2	
Water	%	ASTM D6304	>0.05	0.007	△ 0.071	
ppm Water	ppm	ASTM D6304	>500	75	△ 710	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		21497		
Particles >6µm		ASTM D7647	>1300	4730		
Particles >14µm		ASTM D7647	>80	308		
Particles >21µm		ASTM D7647	>20	100		
Particles >38µm		ASTM D7647	>4	4		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 22/19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.42	0.70	



OIL ANALYSIS REPORT

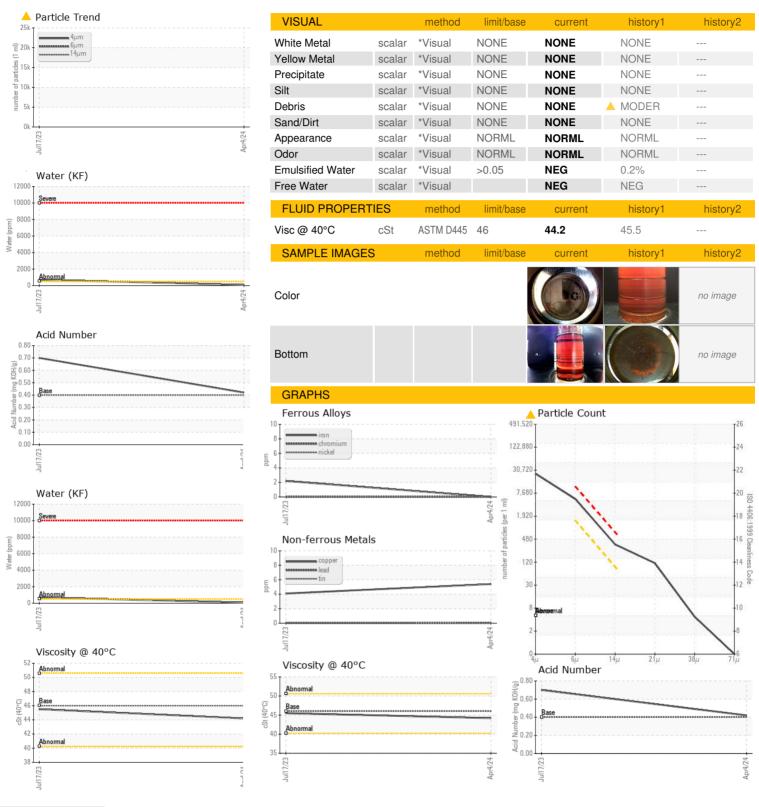





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

: KCPA014911 Lab Number : 06145896 Unique Number : 10975974

Received : 11 Apr 2024 **Tested** Diagnosed

: 12 Apr 2024

: 15 Apr 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount)

US 92704

PACIFIC WESTERN CONTAINER

Contact: Service Manager

4044 W GARY AVE

SANTA ANA, CA

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: