


OIL ANALYSIS REPORT

Sample Rating Trend

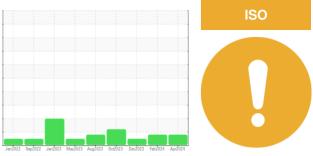

Hydraulic System Fluid CASTROL BRAYCO MICRONIC 882 (--- GAL)

DIAGNOSIS

Area HPU28 Machine Id

HTS23

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0896048	WC0896067	WC0817739
Sample Date		Client Info		08 Apr 2024	13 Feb 2024	12 Dec 2023
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m		0	0	0
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m	-	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		3	677	714
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	5	25
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	<1
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.013	0.015	0.012
ppm Water	ppm	ASTM D6304	>500	138	155	123
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	0 705	613	536
Particles >6µm		ASTM D7647	>160	119	185	126
Particles >14µm		ASTM D7647	>20	4	6	8
Particles >21µm		ASTM D7647	>4	1	1	2
Particles >38µm		ASTM D7647	>3	0	0	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/11	17/14/9	6/15/10	16/14/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.014	0.968	0.918	0.987


Submitted By: TRENT MCADAMS Page 1 of 2





OIL ANALYSIS REPORT




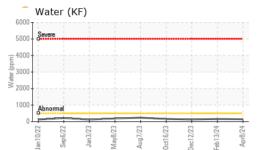








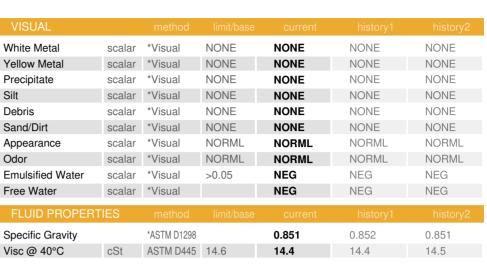

SAMPLE IMAGES

Bottom

Color

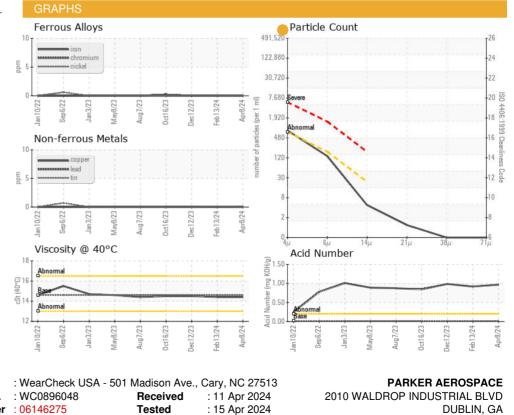





Lab Number Unique Number : 10976353 Tested Diagnosed

: 15 Apr 2024 - Angela Borella Test Package : IND 2 (Additional Tests: KF, SpecGravity) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PARDUBGA [WUSCAR] 06146275 (Generated: 04/15/2024 18:05:21) Rev: 1

Submitted By: TRENT MCADAMS

Contact: TRENT MCADAMS

trent.mcadams@parker.com

E:

US 31021

T: (478)275-4030