




OIL ANALYSIS REPORT

Sample Rating Trend

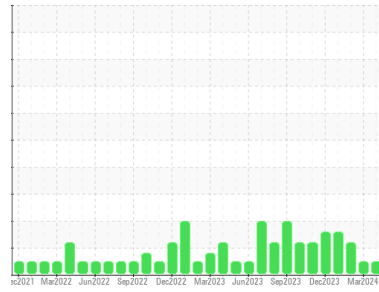

NORMAL



Area

HPU04

Machine Id

HTS14

Component

Hydraulic System

Fluid

CASTROL BRAYCO MICRONIC 882 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0896047	WC0896051	WC0896068
Sample Date	Client Info		08 Apr 2024	06 Mar 2024	13 Feb 2024
Machine Age	mths	Client Info	0	0	0
Oil Age	mths	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0
Chromium	ppm	ASTM D5185m	>20	0	0
Nickel	ppm	ASTM D5185m	>20	0	0
Titanium	ppm	ASTM D5185m		0	<1
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>20	0	0
Lead	ppm	ASTM D5185m	>20	0	0
Copper	ppm	ASTM D5185m	>20	0	0
Tin	ppm	ASTM D5185m	>20	0	0
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	2

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		0	0
Manganese	ppm	ASTM D5185m		0	0
Magnesium	ppm	ASTM D5185m		0	0
Calcium	ppm	ASTM D5185m		0	0
Phosphorus	ppm	ASTM D5185m		735	691
Zinc	ppm	ASTM D5185m		0	<1
Sulfur	ppm	ASTM D5185m		0	0

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0
Sodium	ppm	ASTM D5185m		<1	1
Potassium	ppm	ASTM D5185m	>20	<1	0
Water	%	ASTM D6304	>0.05	0.017	0.018
ppm Water	ppm	ASTM D6304	>500	176	181

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	353	205	399
Particles >6µm	ASTM D7647	>160	52	59	151
Particles >14µm	ASTM D7647	>20	7	5	24
Particles >21µm	ASTM D7647	>4	2	1	9
Particles >38µm	ASTM D7647	>3	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>16/14/11	16/13/10	15/13/10	16/14/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.014	0.793	0.771




OIL ANALYSIS REPORT

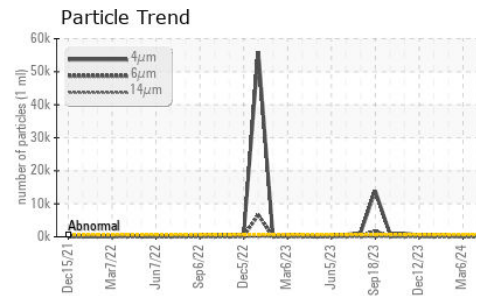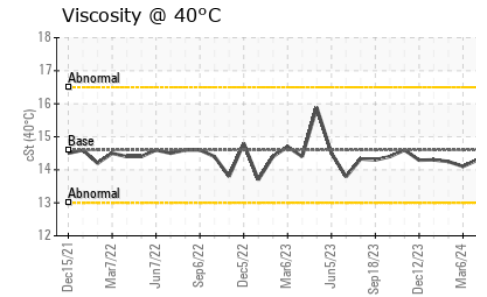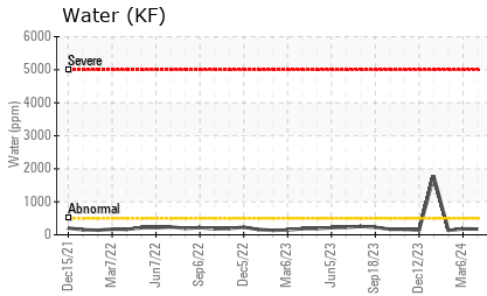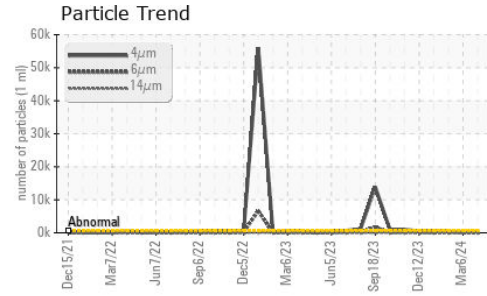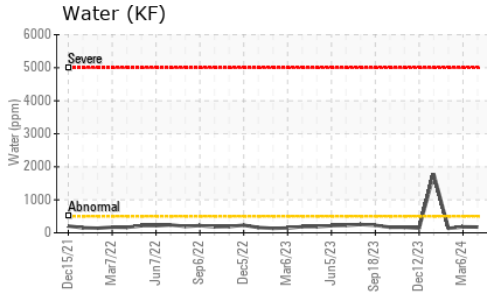




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298		0.851	0.851	0.851
Visc @ 40°C	cSt	ASTM D445	14.6	14.3	14.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

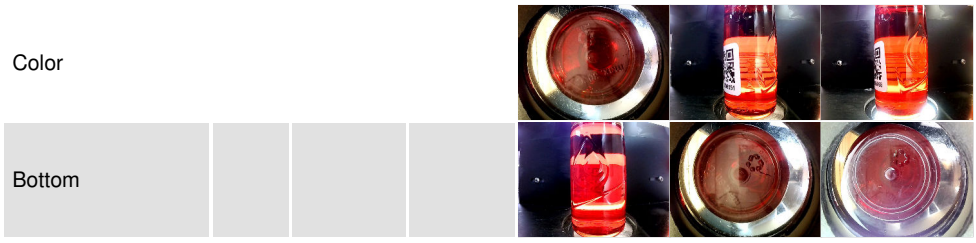

GRAPHS

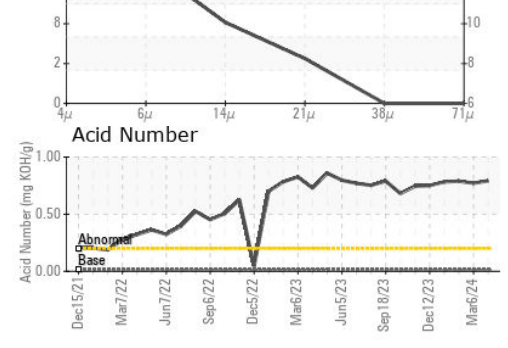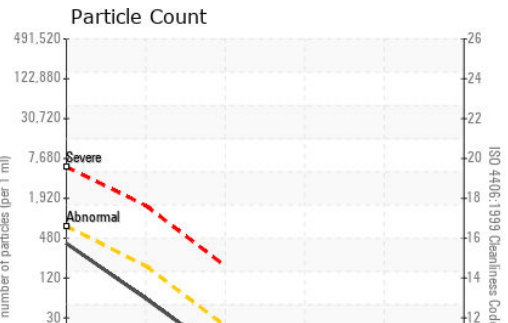

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0896047
Lab Number : 06146276
Unique Number : 10976354
Test Package : IND 2 (Additional Tests: KF, SpecGravity)
Received : 11 Apr 2024
Tested : 15 Apr 2024
Diagnosed : 15 Apr 2024 - Wes Davis

PARKER AEROSPACE
 2010 WALDROP INDUSTRIAL BLVD
 DUBLIN, GA
 US 31021
 Contact: TRENT MCADAMS
 trent.mcadams@parker.com
 T: (478)275-4030
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)