


# **OIL ANALYSIS REPORT**

HPU30 **HTS41** 

Hydraulic System

CASTROL BRAYCO MICRONIC 756 5606 (--- GAL)





## **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

## Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

GAL)		sc2021 Mar202	2 Jun2022 Sep2022 Dec202	22 Mar2023 Jun2023 Sep2023 Deci	2023 Mar2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0896046	WC0896049	WC0896070
Sample Date		Client Info		08 Apr 2024	06 Mar 2024	13 Feb 2024
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		779	379	470
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		0	25	96
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	0
Sodium	ppm	ASTM D5185m		<1	1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.05	0.005	0.003	0.005
ppm Water	ppm	ASTM D6304	>500	52	38	52
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>640	<u> </u>	<b>△</b> 1638	<u></u> ∠2838
Particles >6µm		ASTM D7647	>160	<u>212</u>	302	<u>▲</u> 670
Particles >14μm		ASTM D7647	>20	11	15	<b>△</b> 30
Particles >21µm		ASTM D7647	>4	3	3	<u></u> 5
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/11	<u> </u>	<u>▲</u> 18/15/11	<b>△</b> 19/17/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.03	0.045	0.044	0.047



# **OIL ANALYSIS REPORT**

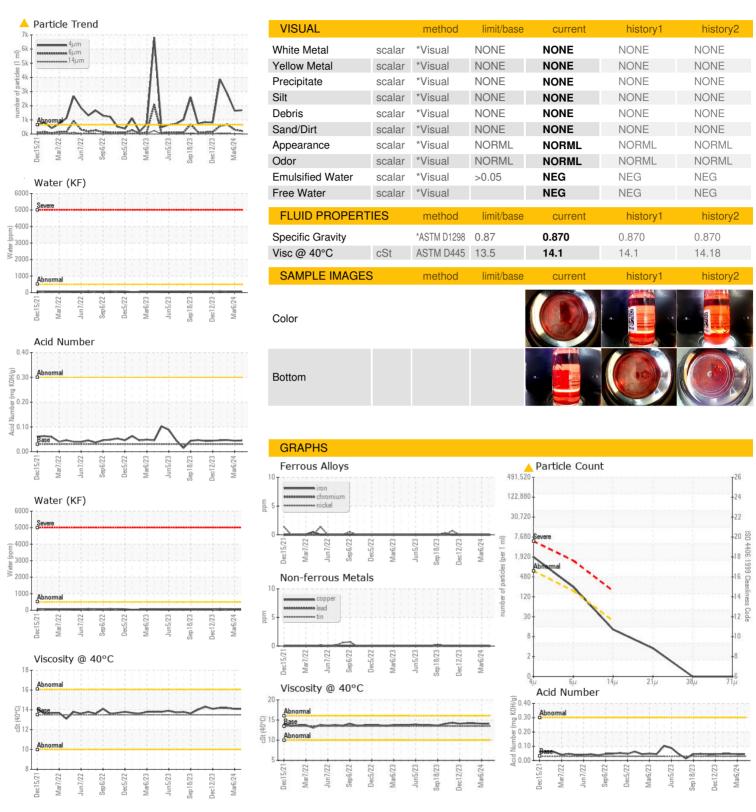





Laboratory Sample No.

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0896046 : 06146279

Unique Number: 10976357

Received : 11 Apr 2024 **Tested** Diagnosed

: 16 Apr 2024

: 16 Apr 2024 - Jonathan Hester

US 31021 Contact: TRENT MCADAMS trent.mcadams@parker.com T: (478)275-4030 F:

2010 WALDROP INDUSTRIAL BLVD

PARKER AEROSPACE

Test Package : IND 2 ( Additional Tests: KF, SpecGravity ) Certificate 12367

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: PARDUBGA [WUSCAR] 06146279 (Generated: 04/16/2024 09:14:07) Rev: 1

Submitted By: TRENT MCADAMS

DUBLIN, GA