


# **OIL ANALYSIS REPORT**

Sample Rating Trend

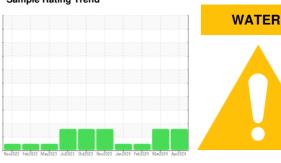

HPU22
Machine Id
TB05
Component
Hydraulic System
Fluid
Skydrol (--- GAL)

## DIAGNOSIS

#### Recommendation

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		NOVZUZZ F60Z	uza mayzuza Juizuza Uctzi	023 Novž023 Janž024 Feb2024 Mar	ZUZ4 AprzUZ4	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0896041	WC0896054	WC0896062
Sample Date		Client Info		08 Apr 2024	06 Mar 2024	13 Feb 2024
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	<1
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m	110	144	94	88
Phosphorus	ppm	ASTM D5185m	37	28174	24351	30094
Zinc	ppm	ASTM D5185m		0	2	<1
Sulfur	ppm	ASTM D5185m	220	322	224	298
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	1
Sodium	ppm	ASTM D5185m		1	5	6
Potassium	ppm	ASTM D5185m		32	27	27
Water	%	ASTM D6304	>0.750	<b>△</b> 0.804	△ 0.899	0.162
ppm Water	ppm	ASTM D6304	>7500	<u>A</u> 8042	▲ 8995	1620
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	270	91	151
Particles >6µm		ASTM D7647	>1300	37	29	68
Particles >14μm		ASTM D7647	>160	5	4	13
Particles >21µm		ASTM D7647	>40	1	2	4
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/12/10	14/12/9	14/13/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.04	0.134	0.096	0.298



## **OIL ANALYSIS REPORT**

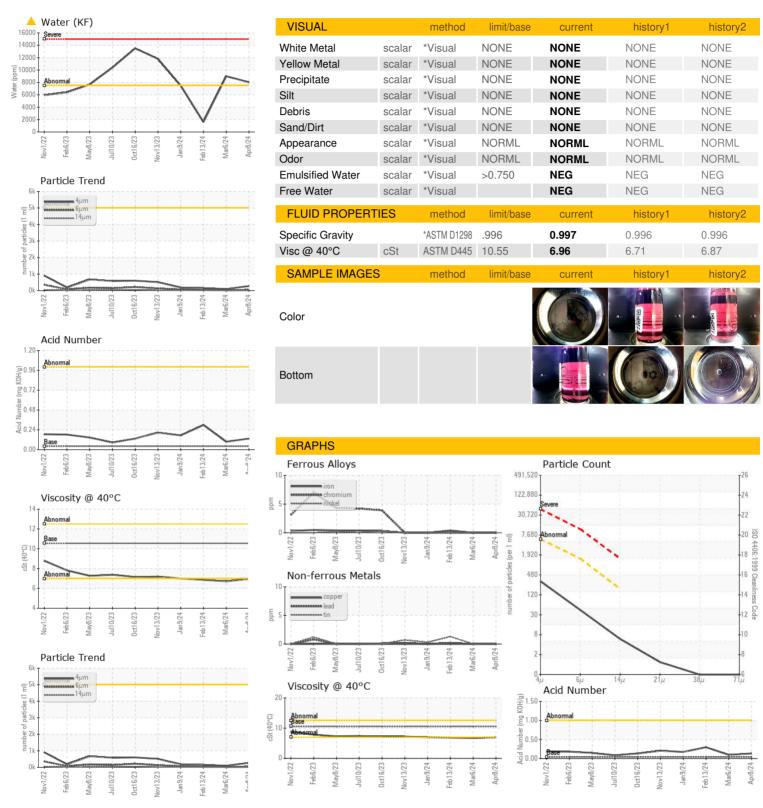





Certificate 12367

Laboratory Sample No.

: WC0896041 Lab Number : 06146284 Unique Number : 10976362

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** 

: 11 Apr 2024 : 16 Apr 2024 Diagnosed

: 16 Apr 2024 - Jonathan Hester Test Package : IND 2 ( Additional Tests: KF, SpecGravity )

US 31021 Contact: TRENT MCADAMS trent.mcadams@parker.com T: (478)275-4030

PARKER AEROSPACE

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Report Id: PARDUBGA [WUSCAR] 06146284 (Generated: 04/16/2024 09:13:37) Rev: 1

Submitted By: TRENT MCADAMS

2010 WALDROP INDUSTRIAL BLVD

DUBLIN, GA