


FUEL REPORT

Machine Id

JCB G125 RST4F FG21 (S/N 2656693)

Diesel Fuel

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)





Recommendation

This is a baseline read-out on the submitted sample. No corrective action is recommended at this time.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no indication of any contamination in the fuel.


Fuel Condition


The condition of the fuel is acceptable for the time in service.

| LOW SULPHUN) (- | - GAL) | | May2023 | Apr2U24 | | |
|-----------------|--------|-------------|------------|-------------|-------------|----------|
| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | JCB005573 | JCB005574 | |
| Sample Date | | Client Info | | 05 Apr 2024 | 26 May 2023 | |
| Machine Age | hrs | Client Info | | 11 | 8 | |
| Sample Status | | | | NORMAL | NORMAL | |
| PHYSICAL PROP | ERTIES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 3.0 | 3.11 | 2.86 | |
| SULFUR CONTEN | ٧T | method | limit/base | current | history1 | history2 |
| Sulfur | ppm | ASTM D5185m | 10 | 0 | 0 | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | <1.0 | 0 | 0 | |
| Sodium | ppm | ASTM D5185m | < 0.1 | 0 | 0 | |
| Potassium | ppm | ASTM D5185m | < 0.1 | <1 | <1 | |
| Water | % | ASTM D6304 | < 0.05 | 0.002 | 0.003 | |
| ppm Water | ppm | ASTM D6304 | <500 | 24 | 31.3 | |
| HEAVY METALS | | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | < 0.1 | 1 | 0 | |
| Nickel | ppm | ASTM D5185m | <0.1 | <1 | 0 | |
| Lead | ppm | ASTM D5185m | < 0.1 | 1 | 0 | |
| Vanadium | ppm | ASTM D5185m | <0.1 | <1 | 0 | |
| Iron | ppm | ASTM D5185m | < 0.1 | <1 | 0 | |
| Calcium | ppm | ASTM D5185m | <0.1 | 0 | 0 | |
| Magnesium | ppm | ASTM D5185m | < 0.1 | <1 | 0 | |
| Phosphorus | ppm | ASTM D5185m | <0.1 | 3 | 0 | |
| Zinc | ppm | ASTM D5185m | <0.1 | 2 | 0 | |
| SAMPLE IMAGES | ; | method | limit/base | current | history1 | history2 |
| Color | | | | | | no image |
| | | | | | | |



FUEL REPORT

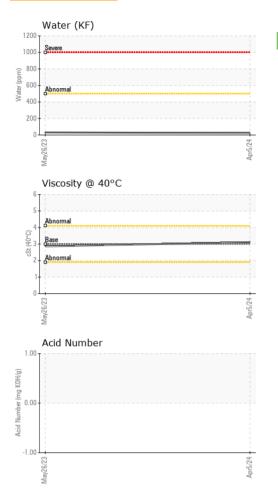

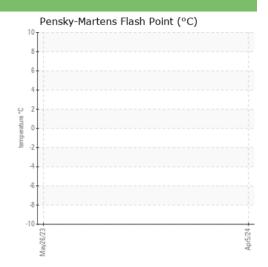



Certificate 12367

Laboratory Sample No. Lab Number : 06146287

: JCB005573 Unique Number : 10976365

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

: 11 Apr 2024 : 16 Apr 2024

: 16 Apr 2024 - Jonathan Hester

MERIDIAN UTILITY EQUIPMENT SALES 1315 VINCI AVE SACRAMENTO, CA US 95838

Diagnosed Test Package : MOB 1 (Additional Tests: KF) Contact: JOSHUA MURCH To discuss this sample report, contact Customer Service at 1-800-237-1369. JOSH.MURCH@MERIDIANPACIFIC.COM

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (916)308-4430

Contact/Location: JOSHUA MURCH - MERSAC