




# OIL ANALYSIS REPORT

Sample Rating Trend

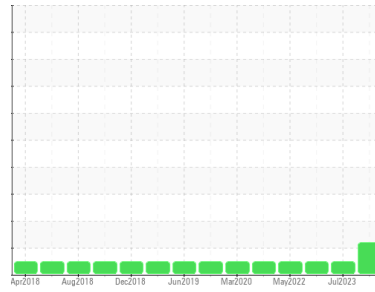

**WEAR**



Machine Id  
**LIEBHERR 1400 CR4415 (S/N 074-414)**  
 Component  
**Diesel Engine**  
 Fluid  
**DISEL ENGINE OIL SAE 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0892987</b>	WC0810428	WC0746611
Sample Date	Client Info		<b>05 Apr 2024</b>	31 Jul 2023	05 Oct 2022
Machine Age	hrs	Client Info	<b>11100</b>	9667	8803
Oil Age	hrs	Client Info	<b>500</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>8</b>	15	5
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	1	2
Lead	ppm	ASTM D5185m	>30	<b>6</b>	9	2
Copper	ppm	ASTM D5185m	>125	<b>▲ 180</b>	58	18
Tin	ppm	ASTM D5185m	>5	<b>2</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>81</b>	257	325
Barium	ppm	ASTM D5185m	10	<b>7</b>	50	2
Molybdenum	ppm	ASTM D5185m	100	<b>57</b>	44	44
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>400</b>	525	420
Calcium	ppm	ASTM D5185m	3000	<b>1825</b>	1691	1499
Phosphorus	ppm	ASTM D5185m	1150	<b>1030</b>	1068	959
Zinc	ppm	ASTM D5185m	1350	<b>1285</b>	1391	1126
Sulfur	ppm	ASTM D5185m	4250	<b>3758</b>	4749	4203

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>60	<b>6</b>	10	9
Sodium	ppm	ASTM D5185m	>158	<b>3</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	15	14
Fuel	%	ASTM D3524	>5	<b>0.7</b>	<1.0	<1.0

## INFRA-RED






	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	8.6	6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	21.3	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	18.7	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.7</b>	6.5	10.3







# OIL ANALYSIS REPORT

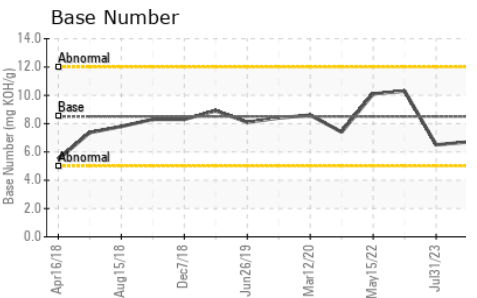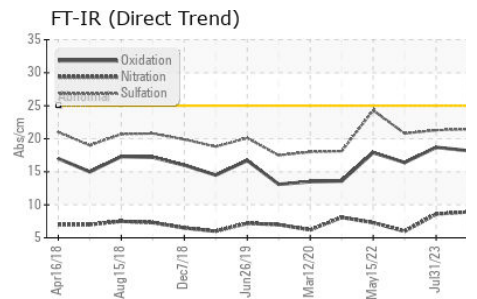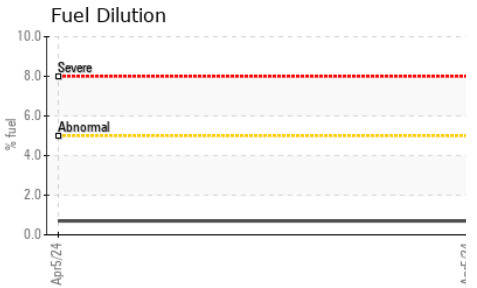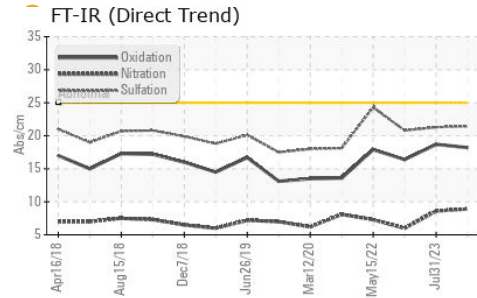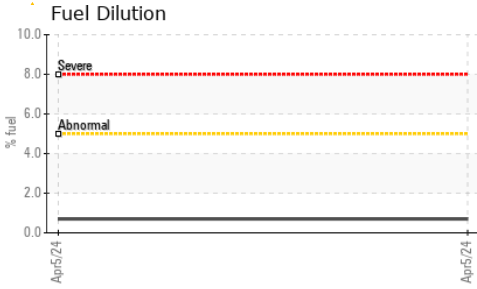

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	11.7	12.9

## GRAPHS

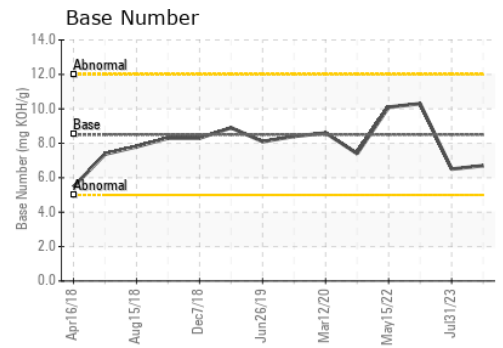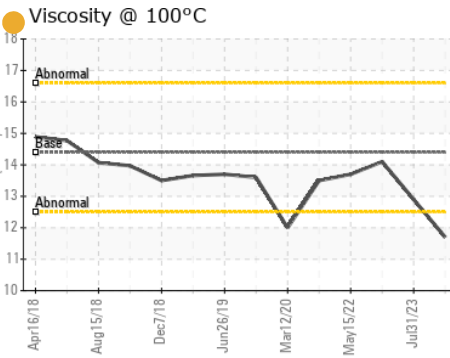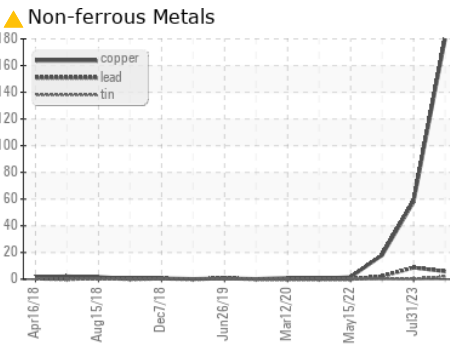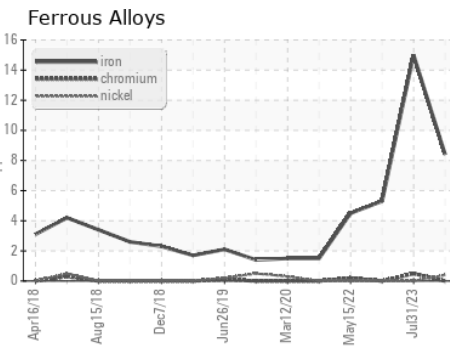

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0892987 **Received** : 11 Apr 2024  
**Lab Number** : **06146344** **Tested** : 17 Apr 2024  
**Unique Number** : 10976422 **Diagnosed** : 17 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests : FuelDilution, PercentFuel, TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**BUCKNER - WILLIS**  
 18123 HWY 75 NORTH  
 WILLIS, TX  
 US 77378

Contact: JOHN HAWKINS  
 johnh@bucknercompanies.com

T:  
F: