




# OIL ANALYSIS REPORT

Sample Rating Trend

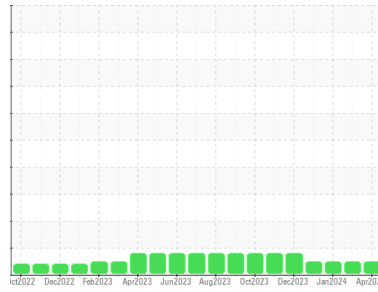

**NORMAL**



Area  
**ARIZONA**  
Machine Id  
**VOLVO 4903**  
Component  
**Diesel Engine**  
Fluid  
**NAPA Motor Oil 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0899585</b>	WC0899581	WC0892127
Sample Date	Client Info		<b>08 Apr 2024</b>	01 Mar 2024	05 Jan 2024
Machine Age	hrs	Client Info	<b>2931</b>	2683	2520
Oil Age	hrs	Client Info	<b>2115</b>	1867	1704
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>76</b>	67	73
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >2	<b>7</b>	7	8
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>7</b>	6	8
Lead	ppm	ASTM D5185m >40	<b>4</b>	4	4
Copper	ppm	ASTM D5185m >330	<b>206</b>	213	250
Tin	ppm	ASTM D5185m >15	<b>4</b>	3	4
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>16</b>	23	20
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>27</b>	31	36
Manganese	ppm	ASTM D5185m	<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m	<b>624</b>	613	631
Calcium	ppm	ASTM D5185m	<b>1475</b>	1457	1433
Phosphorus	ppm	ASTM D5185m	<b>747</b>	692	793
Zinc	ppm	ASTM D5185m	<b>913</b>	813	912
Sulfur	ppm	ASTM D5185m	<b>2909</b>	2393	2532

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	13	16
Sodium	ppm	ASTM D5185m	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>16</b>	13	17

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.7	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.1</b>	10.6	10.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.6</b>	21.8	22.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.6</b>	18.2	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.6</b>	5.8	5.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

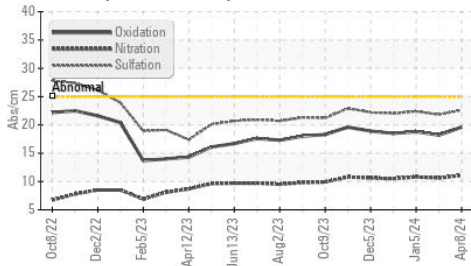

Base Number

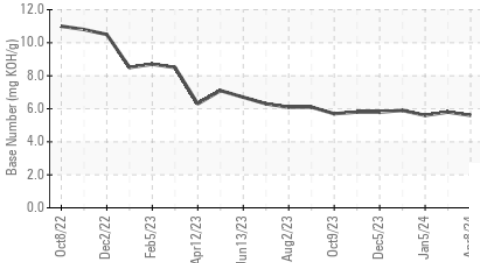

Viscosity @ 100°C

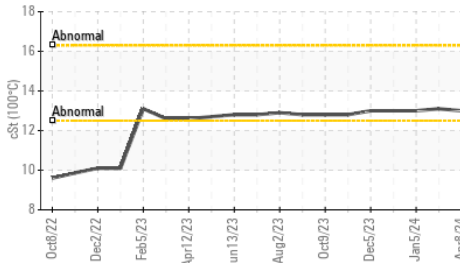


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.0	13.1	13.0

## GRAPHS


Ferrous Alloys

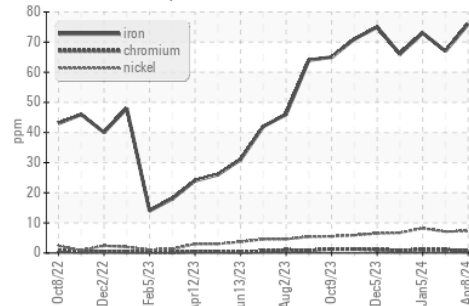

Non-ferrous Metals

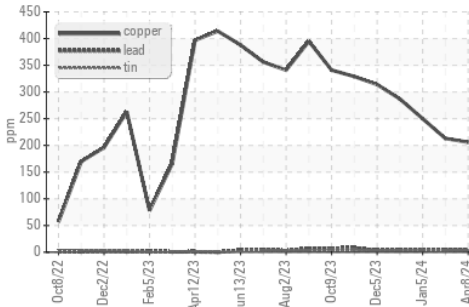

Viscosity @ 100°C

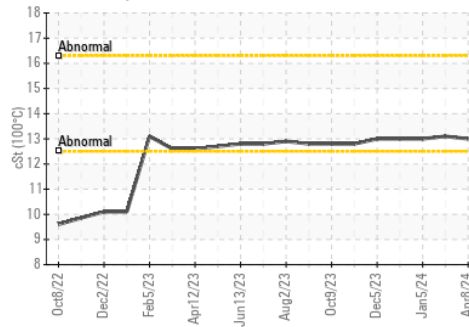

Base Number



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0899585      **Received** : 11 Apr 2024  
**Lab Number** : 06146390      **Tested** : 12 Apr 2024  
**Unique Number** : 10976468      **Diagnosed** : 15 Apr 2024 - Don Baldrige  
**Test Package** : FLEET

**LIBERTY DISPOSAL**  
 6401 S EASTERN AVE  
 OKLAHOMA CITY, OK  
 US 73149  
 Contact: CATHY ROSA  
 c.rosa@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)